ACCESSORIES

September 2019 Price List

AIS

This page intentionally left blank.

PRODUCT INFORMATION

Accessories Statement of Line 5
Accessories Finish Options 8

ACCESSORIES

Perimeter Electrical 10
Compact USB Charging Hubs 12
Hide-a-Dock Workspace Solutions 14
Recessed Power 15
Grommet Power. 16
Plug-In Power Solutions 18
Power Data Boxes 21
Multi-Circuit Desking Electrical 24
Electrical Jumpers 25
In-Feeds. 26
Data Plate Kits, Data Housing Units, Powerway Dust Covers 27
Duplex Outlets 28
Wall Mounted Tackboards and Shared Open Overhead Tackboards 29
CPU Holders 30
Adjustable Footrest and Anti-Fatigue Mats. 31
Monitor Arms 32
Tasklights 33
Pelican and Pencil Drawers. 36
Keyboard Arms 37
Worksurface Rails. 38
Worksurface Mounted Tool Rails 39
Paper Flow Elements 40
Credenza and Pedestal Cushions 41
Flipper Door Security Panels, Lock Cores and Keys 42
Shelf Dividers and Pedestal Extension Shrouds 42
Coat and Bag Hooks, Cable Grips and Anti-Slip Bumpers. 43
Grommet Hole Covers and Replacement Pulls. 44
Frameless Glass Alignment Kits and Ganging Bolts 44
Hospitality/Catering Cart and Mobile White Boards 45

WARRANTY & TERMS AND CONDITIONS

For Warranty & Terms and Conditions please visit:
https://aiscmsprod.blob.core.windows.net/infocenter/AISTermsWarranty.pdf

© 2019, AIS, Inc.

This page intentionally left blank.

ACCESSORIES

ELECTRICAL



Control Box (In-Feed)



I-Connector



Jumper Cables

Desktop Power Module



Mini Desktop Power Module



Surface Access Desktop Power Module



Charger Dock 110



Charger Dock 120



Charger Dock 130



Charger Dock 140

Wireless Charger Dock 150



Wireless Charger Dock 950



Charger Dock 701



Charger Dock 702

Charger Dock 650



Charger Dock 1200



Surface Mount Power Units

Charger Dock 200

Charger Dock 201

Charger Dock 270

Charger Dock 271

Pull-Up Power Dock



Ashley Uno
Clamp, Under or Bezel



Ashley Duo
Clamp, Under or Bezel



Ashley 202
Clamp, Under or Bezel



Ashley Duo Air



Ashley Trio
Clamp, Under or Bezel



Ashley Quad
Clamp, Under or Bezel



Stafford



Stafford Mini



Interact IV G2 Power Data Box



Multi-Circuit Electrical Power Units



Multi-Circuit Desking Access Housing

Electrical Jumpers



Side Mounted Base In-Feeds



I-Connector



Data Plate Kit



Surface Mount Data Housing Kit



Powerway Dust Cover



Duplex Outlets



USB Outlets



Duplex Outlet Hole Cover

© 2019, AIS, Inc.

Tackboards, CPU Holders and Tasklights, Drawers, Keyboard Arms and Tool Rails

TACKBOARDS



Wall Mounted Tackboard



Wall Mounted Tackboard w/ Cord Groove



Shared Open Overhead Tackboards

CPU HOLDERS



Easy Access CPU Holder



Lockable CPU Holder



Elevator CPU Holder

TASKLIGHTS

Clamp Base LED Desk Lamp

Desk Base LED Desk Lamp

Short Arm Clamp Base LED Desk Lamp



LIM Personal Desk Lamp



Standard Tasklight



Overhead LED Lamp



Tasklight Cord Managers

DRAWERS



Pelican Drawer I



Pelican Drawer II



Pencil Drawer



Spin-Out Drawers

MONITOR ARMS



Single Monitor Arm



Double Monitor Arm



M9 Double Monitor Arm

KEYBOARD ARMS

Standard Keyboard Arm



Standard Extended Keyboard Arm



Standard Mouse Tray



V Series Keyboard Arm



V Series Extended Keyboard Arm



V Series Sit-Stand Keyboard Arm

WORKSURFACE AND TOOL RAILS



Worksurface Rail



Extended Worksurface Rail



Mounting Bracket



Worksurface Mounted Tool Rail
Clamp or Rail Mount



Standard Tool Bar Accessories



Metal Tool Bar Accessories

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Miscellaneous Accessories

MISCELLANEOUS ACCESSORIES



Credenza Cushions



Pedestal Cushions



Flipper Door Security Panel



Lock Cores and Keys



Shelf Divider



Pedestal Extension Shroud

Panel Frame Coat Hook

Worksurface Bag Hook



Cable Grip



Adhesive Back Anti-Slip Bump



Grommet Hole Covers



Replacement Pulls



Frameless Glass Alignment Kits



Ganging Bolts

Hospitality/Catering Cart

Mobile White Boards



Anti-Fatigue Mat

© 2019, AIS, Inc.

Fabric Options

UPHOLSTERY FABRIC BY GUILFORD OF MAINE

Name	Style Number	Grade
Aquatint*	9474	A
Diva*	9860	A
Lisbon*	9477	A
Open House*	2334	A
Outline*	9468	A
Oxford	9914	A
Ticker*	9862	A
Timeless*	9846	A
Beacon	9256	B
Beehave	3948	B
Blink	1577	B
Frolic	5000	B
Highbeams	9834	B
Lifesaver	2877	B
Prism	9005	B
Soundbite	2879	B
Xceed	5901	B
Blinker	9098	C
Limelight	9480	C
Mainstream	9478	C
Moguls	2386	C
Playful	3400	C
Portofino	9467	C
Revival	9217	C
Underground	2967	C

UPHOLSTERY FABRIC BY NASSIMI

Name	Style Number	Grade
Autumn	PFO-001	A
Baltic	PFO-002	A
Bone	PFO-003	A
Caramel	PFO-004	A
Coffee	PFO-005	A
Cranberry	PFO-006	A
Doe	PFO-007	A
Ebony	PFO-008	A
Flintstone	PFO-009	A
Ivory	PFO-010	A
Merlot	PFO-011	A
Oregano	PFO-012	A
Pacific	PFO-013	A
Peat	PFO-014	A
Pebble	PFO-015	A
Seal	PFO-016	A
Spring	PFO-017	A
Sunflower	PFO-018	A

UPHOLSTERY FABRIC BY MAYER

Name	Style Number	Grade
Aegean	621-053	C
Aquamarine	621-043	C
Bitumen	621-006	C
Cactus	621-003	C
Charcoal	621-016	C
Citron	621-013	C
Dapper	621-036	C
Dew	621-056	C
Espresso	621-010	C
Eucalyptus	621-023	C
Fawn	621-017	C
Indigo	621-014	C
Light Grey	621-046	C
Midnight	621-004	C
Mink	621-000	C
Opal	621-033	C
Persimmon	621-009	C
Pewter	621-026	C
Plum	621-008	C
Purple	621-005	C
Ruby	621-001	C
Tangelo	621-019	C
Tomato	621-011	C
Topaz	621-002	C
Winter	621-007	C

UPHOLSTERY FABRIC BY CAMIRA

Name	Style Number	Grade
Abertay	CUZ3B	D
Bromsgrove	CUZ35	D
Camphill	CUZ1K	D
Dartmouth	CUZ2Q	D
Dunhurst	CUZ58	D
Edinburgh	CUZ1Y	D
Goldsmith	CUZ39	D
Handcross	CUZ63	D
Holyoke	CUZ2T	D
Newcastle	CUZ1W	D
Plymouth	CUZ1R	D
Silcoates	CUZ30	D
Silverdale	CUZ28	D
St. Andrews	CUZ86	D
Surrey	CUZ1E	D
Trevelyan	CUZ31	D
Wesley	CUZ82	D

UPHOLSTERY FABRICS BY MAHARAM

Name	Grade
Bar	D
Coin	D
Disc	D
Divide	D
Manner	D
Medium	D
Messenger	D
Metric	D
Oblique	D
Pick	D
Technic	D

UPHOLSTERY FABRIC BY MOMENTUM

Name	Style Number	Grade
Expo	-	D
Insight	-	D
Origin	-	D
Perk	-	D
Ace	-	D
Fuse	-	D

*Beginning January 1, 2020 all of Aquatint, Diva, Lisbon, Outline, Ticker, and Timeless will be discontinued. Additionally the following four Open House fabrics: Open House Olive Green, Open House Magenta, Open House Amber and Open House Henna will also be discontinued.

C.O.M. Fabric Policy

- It is mandatory that you work directly with your AIS Customer Service Representative for all COM related testing and orders. They will provide all necessary forms to you, as well as work with you with regard to sending in correct yardage and where to send it, along with necessary RA# or #s. Please note an RA must be submitted along with the fabric for testing, as well as an RA created for an actual order.
- **Please Note:** A three to five yard sample is required for testing and approval for use on all monolithic panel systems. A one yard sample is required for testing and approval on Divi Insert Tiles, Matrix Tiles, flipper doors and tackboards. We may be able to test upholstery fabrics with a swatch, your Customer Service Representative will advise based on the fabric being tested; otherwise a 1 yard sample must be submitted for testing. Results take 48 - 72 hours.
- Customer Service must be advised as to the width of the fabric rolls being supplied (54”W or 60”W). Customer Service must also be advised if the fabric has a backer.
- Yardage required for the job must be calculated by an AIS Customer Service Rep.
- Once AIS has approved the COM fabric, a fabric sample needs to be marked by the dealer with “Front”, “Top”, and “Bottom”, to be sure fabric is applied correctly. The fabric sample then needs to be attached to a COM Fabric Dealer Form and forwarded to AIS Customer Service. The COM Fabric Dealer Form may be downloaded or printed here.
- Fabrics may be discontinued or obsolete without notice.
- Contact AIS Customer Service with any questions regarding fabric availability.
- All directional fabric will be railroaded.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Sep 2019
© 2019, AIS, Inc.

ACCESSORIES PAINT OPTIONS

Name	Color Code	Grade
Black	BK	A
Chalk	CK	A
Dark Tone	DT	A
Grey Value 1	GV1	A
Innertone	HT	A
Light Tone	LT	A
Medium Tone	MT	A
Satin White	SW	A
Warm Brown	WB	A
Champagne Metallic	CHM	B
Dark Grey Metallic	DGM	B
Flint Grey Metallic	FGM	B
Light Grey	LG	B
Metallic Silver	MS	B
Tan Value 1	TV1	B
Warm White	WW	B
Woodrose	WR	B
Antique Gold	AG	C
Blue	BL	C
Graphite Sky	GS	C
Lite Silver Smooth	LSS	C
Orange	OG	C
Red	RD	C
Violet	VT	C
Yellow	YW	C

Custom Paints

- Minimum order size for any custom color is $75,000 list. Extended lead-time will apply.
- Any color not shown on Quick Ship, Standard Grade A, B or C will be considered custom.
- A $450 net paint match fee will be assessed following receipt of (2) 5”x5” samples of paint being matched.
- Minimum order size for any custom color is $75,000.00 list. Extended lead-time will apply.
- Additionally, Grade C paint up-charges will be applied to all applicable products on the order.
- **Important Custom Paint Note:** Most paint match pricing can be covered by the Grade C up-charge in the catalog, however the final pricing can only be determined after the paint is matched and a product list is provided to AIS customer service. An additional fee may apply based on job size and paint color.

© 2019, AIS, Inc.

Perimeter Electrical

CONTROL BOX (IN-FEED)

Model Number	List
E-4W1BIF	910



Notes

Control Box supports up to eight Desk Top Power Modules via Jumper Cables. The Control Box is 10' in length from system plug to wall plug. The Control Box has a built-in sensor which monitors how many Power Modules are on-line and prevents dual powering. Jumper Cables and Power Modules are specified separately.

Product Compatibility: M, D, MW, AO

JUMPER CABLES

L	Model Number	List
12	E-4W1PJ12	185
24	E-4W1PJ24	195
30	E-4W1PJ30	201
36	E-4W1PJ36	209
42	E-4W1PJ42	216
48	E-4W1PJ48	223
54	E-4W1PJ54	229
60	E-4W1PJ60	234
66	E-4W1PJ66	240
72	E-4W1PJ72	248



Notes

Jumper Cables continue the power supply between Desk Top Power Modules.

Product Compatibility: M, D, MW, AO

I-CONNECTOR

Model Number	List
E-4W1ICON	121



Notes

I-Connector allows two jumper cables (above) to be connected together to allow for longer cable length.

Product Compatibility: M, D, MW, AO

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

ADAPT DESK TOP POWER MODULE

Cord Length	Type	Model Number	List
12”	Standard	E-4W1MCM	457
72”	3 Prong Plug	E-4W1MCMP	457



Notes

Adapt Desk Top Power Module clamps to the backside of a flat surface. Power Module interface has two plugs along with a double slot data plate. Standard version shown.

Product Compatibility: M, D, MW, AO, O

MINI ADAPT DESK TOP POWER MODULE

Cord Length	Type	Model Number	List
12”	Standard	E-4W1MCMM	373
72”	3 Prong Plug	E-4W1MCMMP	373



Notes

Mini Adapt Desk Top Power Module clamps to the backside of a flat surface. Power Module interface has two plugs. Standard versions shown,

Product Compatibility: M, D, MW, AO, O

SURFACE ACCESS DESK TOP POWER MODULE

Cord Length	Type	Model Number	List
12”	Standard	E-4W1MFM	623
72”	3 Prong Plug	E-4W1MFMP	623



Notes

Surface Access Desk Top Power Module sits inside a surface cutout. Power Module interface has two plugs along with a double slot data plate. Specify worksurface with cutout separately. Cut out dimension is 5.9”W x 2.6875”D. Unit does not daisy chain.

Product Compatibility: M, D, MW, AO, O

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Compact USB Charging Hubs

CHARGER DOCK 110

Model Number	List
E-DOCK-110	98



Without Mounting Bracket



With Mounting Bracket

Specify	Notes
	Features an internal blue LED power indicator to make USB charger easy to locate. Included mounting bracket gives unit multiple mounting location options. 5V DC 2.1A (10.5 watts) USB charging port when paired with power supply. 8' input cord included. Requires a 0.807" x 0.610" hole for flush mount installation. Measures 0.768"H x 1.063"W x 1.260"D. Measures 0.789"H x 1.102"W x 1.181"D with mounting bracket installed.
	Product Compatibility: M, D, MW, AO, A, O, C

CHARGER DOCK 120

Model Number	List
E-DOCK-120	146



Specify	Notes
	Dual 5V 2.1A (10.5 watts) USB charging ports (power adapter needed) enable charging to multiple devices at once. Unit can be daisy chained, offering multiple charging locations. Includes 5V DC 4.2A wall-plug power adapter with 8' leads. Features two green LED lights to indicate charging in progress and also a blue LED back lighting for easy locating. Measures 0.709"H x 2.827"W x 1.673"D.
	Product Compatibility: M, D, MW, AO, A, O, C

CHARGER DOCK 130 (BOTTOM INPUT)

Model Number	List
E-DOCK-130	127



Specify	Notes
	Simple design allows for easy recessed mounting. Dual 5V DC 2.1A (10.5 watts) USB charging ports (power adapter needed). Includes 5V DC 4.2A wall-plug power adapter with 8' leads. Beveled and flush-mount installation require 1 $^{5}/_{16}$" diameter hole. Route a 1.59" diameter x 0.079" deep step for flush-mount installation. Blue LED back lighting. Bottom input.
	Product Compatibility: M, D, MW, AO, A, O, C

CHARGER DOCK 140 (BOTTOM INPUT)

Model Number	List
E-DOCK-140	127



Without Optional Mounting Ring Ring



With Optional Mounting Ring

Specify	Notes
	Dual 5V DC 2.1A (10.5 watts) USB charging ports (power adapter needed). Includes 5V DC 4.2A wall-plug power adapter with 8' leads. Optional mounting ring included for upholstery installation. Bore a 1 $^{5}/_{16}$" hole for installation or 1.5 hole for install with mounting ring. Route a 2.22" diameter x 0.079" for flush-mount install. Blue LED back lighting. Bottom input. Measures 1.673"H x 2.205"W without mounting ring or 2.717"W with mounting ring.
	Product Compatibility: M, D, MW, AO, A, O, C

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Wireless Charging Docks

WIRELESS CHARGER DOCK 150

Model Number	List
E-DOCK-150	384

USB Closed

USB Open

Specify	Notes
	Unit allows for both wireless charging and USB charging. Pop-up USB ports can be hidden when they are not in use. Includes 8' power cord. Input of DC 5V, 5A. Wireless charger output of 5 watts max. USB charger output of (1x) 2.4A (12 watts) max and (2x) 1A (5 watts) max. Qi V1.2 compliant IC. Wireless charging distance of 6mm max. Bore 3 $^{3}/_{32}$" hole for installation. Measures 2.24"H x 3.41"W. Pop-up USB measures 2.68"W. **Product Compatibility: M, D, MW, AO, A, O, C**

WIRELESS CHARGER DOCK 950

Type	Model Number	List
Standard	E-DOCK-950	247
Quick Charge	E-DOCK-950Q	299



Specify	Notes
	Powered by the latest Qi compliant IC offering reliable and efficient wireless charging in a convenient 3" grommet hub. Includes 8' power cord. Input of 5V, 2A (standard) or DC 9V, 1.67A (quick charge). Output of 5 watts max with DC 5V, 2A power adapter (standard) or 10 watts max with QC 2.0 power adapter (quick charge). Qi V1.2 compliant IC. Wireless charging distance of 6mm max. Measures 1.14"H x 3.50"W. **Product Compatibility: M, D, MW, AO, A, O, C**

© 2019, AIS, Inc.

Hide-a-Dock Workspace Solutions

CHARGER DOCK 701

Model Number	List
E-DOCK-701	676



Closed



Opened

Specify	Notes
	Features aluminum housing with beveled edges. 1 grounded AC outlet, 125V 12A rating. 5V DC 4.2 USB charger with 2 charging ports. Min. 9.5 ft 3C power cord. UL and cUL certified for use in USA and Canada. Opens smoothly by simply pressing down on the lid revealing convenient power; closes easily to be hidden from view when not in use. Cut a 4.88" x 4.02" hole for installation. Requires access from below to mount. Measures 2.75"H x 5.11"W x 4.36"D. Requires 4" clearance underneath surface for movement.
	Product Compatibility: M, D, MW, AO, A, O, C

CHARGER DOCK 650

Type	Model Number	List
Standard	E-DOCK-650	312
USB 4.2A	E-DOCK-650-42	351



Closed



Opened



Open (Installed Side View)

Specify	Notes
	Features two 120V AC outlets, 12A maximum rating. 2 USB 5V 1.05A (5.25 watts) charging ports for charging smart phones, tablets, etc (4.2A option available). 2 USB 2.0 data transmission ports for data communication. One RJ45 Ethernet coupler. One RJ11 phone couple. Minimum 6 ft 14 AWG x 3C power cord. Cut 7.95" x 4.06" hole for installation. Requires access from below to mount. UL & cUL certified for use in USA and Canada. Measures 5.4"H x 8.74"W x 4.88"D.
	Product Compatibility: M, D, MW, AO, A, O, C

CHARGER DOCK 702

Model Number	List
E-DOCK-702	754



Closed



Opened

Specify	Notes
	Features aluminum housing with beveled edges. 2 grounded AC outlet, 125V 12A rating. 5V DC 4.2 USB charger with 2 charging ports. Min. 9.5 ft 3C power cord. UL and cUL certified for use in USA and Canada. Opens smoothly by simply pressing down on the lid revealing convenient power; closes easily to be hidden from view when not in use. Cut a 6.42" x 4.02" hole for installation. Requires access from below to mount. Measures 2.75"H x 6.62"W x 4.36"D. Requires 4" clearance underneath surface for movement.
	Product Compatibility: M, D, MW, AO, A, O, C

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Recessed Power

CHARGER DOCK 1200

Type	Model Number	List
2 Outlet, Ethernet	E-DOCK-1200-1	299
2 Outlet, 2 USB	E-DOCK-1200-2	325



2 Outlet, Ethernet



2 Outlet, 2 USB

Specify	Notes
	Recessed power unit with a soft-to-touch rubber painted faceplate with no screws. Features 2 tamper resistant AC receptacles. Available with two USB ports rated at 2.1A each (10.5 watts) or an Ethernet port. 10' SJT 14AWG*3C power cord. Provides OCP (over current protection). Rating of 125V 60Hz 15A. UL and cUL certified for use in USA and Canada. Measures 2.30"H x 6.81"W x 2.44"D. Top mounted, does not require bottom access for mounting other than cord management.
	Product Compatibility: M, D, MW, AO, A, O, C

SURFACE MOUNT POWER UNIT

Type	Model Number	List
2 Outlet, 2 USB	E-PSFMACUSB-2	182
3 Outlet, 2 USB, Overload	E-PSFMACUSB-3	325



2 Outlet, 2 USB



3 Outlet, 2 USB, Overload

Specify	Notes
	Available with 2 or 3 AC outlets. Recess mounted. Rating of 125v 60Hz 15A. Two USB charging ports. Can be table top mounted with optional C-clamp brackets. UL and cUL certified for use in USA and Canada. 2 outlet unit has a 10' 14 AWGx3c power cord. 3 outlet unit has a min. 6ft 14 AWGx3c power cord, surge protection and overload protection with reset switch. 2 outlet requires a cut out of 6.22" x 1.89" for installation. 3 outlet requires a cut out of 7.4" x 1.7" for installation. 2 outlet, 2 USB measures 1.50"H x 7.09"W x 2.13"D. 3 outlet, 2 USB measures 1.77"H x 8.23"W x 2.09"D. Top mounted, does not require bottom access for mounting other than cor management.
	Product Compatibility: M, D, MW, AO, A, O, C

© 2019, AIS, Inc.

Grommet Power

CHARGER DOCK 200

Model Number	List
E-DOCK-200	247

Specify	Notes
	3” diameter dock with flip lid. 2 grounded AC outlets, 125V 15A rating. 10ft 14AWG x 3C power cord, 15A rating. 1000 joules surge protection available as an option. Bore a 3” hole for installation. Requires access from below to mount. Innovative threaded housing and retaining nut installation system allows for simple, quick and reliable installation. UL and cUL certified for use in USA and Canada. Measures 3.35”H x 3.54”W. **Product Compatibility: M, D, MW, AO, A, O, C**

CHARGER DOCK 201

Model Number	List
E-DOCK-201	260

Specify	Notes
	3” diameter dock. 2 grounded AC outlets, 125V 15A rating. 10 ft. 14AWG x 3C power cord, 15A rating. 1000 joules surge protection available as an option. Bore a 3” hole for installation. Requires access from below to mount. Innovative threaded housing and retaining nut installation system allows for simple, quick and reliable installation. UL and cUL certified for use in USA and Canada. Measures 3.35”H x 3.54”W. **Product Compatibility: M, D, MW, AO, A, O, C**

CHARGER DOCK 270

Model Number	List
E-DOCK-270	338



Specify	Notes
	3” diameter dock with flip lid. 1 grounded AC outlet, 125V 15A rating. Two USB charging ports with shared 4.2A (21 watts) charging power. 10ft 14AWG x 3C power cord, 15A rating. 1000 joules surge protection available as an option. Bore a 3” hole for installation. Requires access from below to mount. Innovative threaded housing and retaining nut installation system allows for simple, quick and reliable installation. UL and cUL certified for use in USA and Canada. Measures 3.35”H x 3.54”W. **Product Compatibility: M, D, MW, AO, A, O, C**

CHARGER DOCK 271

Model Number	List
E-DOCK-271	325

Specify	Notes
	3” diameter dock. 1 grounded AC outlet, 125V 15A rating. Two USB charging ports with shared 4.2A (21 watts) charging power. 10ft 14AWG x 3C power cord, 15A rating. 1000 joules surge protection available as an option. Bore a 3” hole for installation. Requires access from below to mount. Innovative threaded housing and retaining nut installation system allows for simple, quick and reliable installation. UL and cUL certified for use in USA and Canada. Measures 3.35”H x 3.54”W. **Product Compatibility: M, D, MW, AO, A, O, C**

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Sep 2019
© 2019, AIS, Inc.

Grommet Power

PULL-UP POWER DOCK

Model Number	List
TV-2802-PU-4-2	338

Specify	Notes
	2 AC receptacles, AC 125V 15A max. 2 DC 5V USB charging ports provide shared 4.2A (21 watts) charging power. 6 ft (min.), 14AWG power cord. Bore a 3" hole for installation. Innovative threaded housing and retaining nut installation system allows for simple, quick and reliable installations. Pull up the unit by its easy-to-use handle to reveal power receptacle and charging ports. UL and cUL certified for use in USA and Canada. Measures 10.14"H x 3.5"W. Requires access from below to mount. Requires 12" clearance under mounting surface to operate correctly.

Product Compatibility: M, D, MW, AO, A, O, C

© 2019, AIS, Inc.

Plug-In Power Solutions

ASHLEY UNO

Mounting Type	Model Number	List
Clamp	E-AUTCW	578
Under	E-AUUMW	578
Bezel	E-AUBMW	578



Clamp Mount



Under Mount

Bezel

Specify	Notes
• N/A	Features one AC outlet for high-power devices and dual 2.1 amp USB charging ports. Each USB port utilizes a Smart Device recognition Chip to monitor and deliver the required amperage to your devices. Available in white. The unit comes with a 6' cord and is available with surface, under or bezel mounting options. Fits in standard size grommets. Bezel mount requires special surface (2.12" x 4.45" hole size, 3/4" - 1 1/2" surface thickness). **Product Compatibility: M, D, MW, AO, A, O, C**

ASHLEY DUO

Mounting Type	Model Number	List
Clamp	E-ADTCW	898
Under	E-ADUMW	898
Bezel	E-ADBMW	898



Clamp Mount



Under Mount



Bezel

Specify	Notes
• Color (White/White or White/Silver)	Features two AC outlets for high-power devices and dual 2.1 amp USB ports. Each USB port utilizes a Smart Device Recognition chip to monitor and deliver the required amperage to your devices. The unit comes with a 72" cord option and is available with surface, under or bezel mounting options. Fits in standard size grommet. Bezel mount requires special surface (6" x 2.19" hole size, 1/2" - 1 1/2" surface thickness). **Product Compatibility: M, D, MW, AO, A, O, C**

ASHLEY 202

Mounting Type	Model Number	List
Clamp	E-A202TCW	738
Under	E-A202UMW	738
Bezel	E-A202BMW	738



Clamp Mount



Under Mount



Bezel

Specify	Notes
• Color (White/White or White/Silver)	Features two AC outlets for high-power devices and two data inserts for your choice of the included blank insert or optional HDMI, RJ-45 or VGA inserts. The unit comes with a 72" cord and is available with surface, under or bezel mounting options. Bezel mount requires special surface (2.19" x 7.35" hole size, 3/4" - 1 1/2" surface thickness). **Product Compatibility: M, D, MW, AO, A, O, C**

ASHLEY DUO AIR

Model Number	List
E-ADAP	920



Closed



Open

Specify	Notes
• Color (White or Silver)	Features a pop-up cover that reveals an integrated wedge with two AC outlets and two USB ports. Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage to your devices. The unit comes with a 72" cord. Ashley Duo Air requires special surface (4.63" x 6.75" hole size). **Product Compatibility: M, D, MW, AO, A, O, C**

Revision Sep 2019
© 2019, AIS, Inc.

Plug-In Power Solutions

ASHLEY TRIO

Mounting Type	Model Number	List
Clamp	E-ATTCW	1,078
Under	E-ATUMW	792
Bezel	E-ATBMW	792



Clamp Mount



Under Mount



Bezel

Specify	Notes
• Color (White/White or White/Silver)	Features three AC outlets for high-power devices, two USB ports and a data port location for optional HDMI, RJ-45, VGA or blank insert if desired. Each Ashley unit includes adapters for Keystone, Siemon, Ortronics Tracjack, Panduit Pan-Net & Mini-Com, Commscope Systimax & Uniprise and Belden Nordx Ez-Mdvo. Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage for your devices. The unit comes with a 72" cord option and is available with surface, under or bezel mounting options. Bezel mount requires special surface (2.19" x 8.50" hole size, 3/4" - 1 1/2" surface thickness). **Product Compatibility: M, D, MW, AO, A, O, C**

ASHLEY QUAD

Mounting Type	Model Number	List
Clamp	E-AQTCW	1,322
Under	E-AQUMW	1,322
Bezel	E-AQBMW	1,322



Clamp Mount



Under Mount



Bezel

Specify	Notes
• Color (Black or White)	Features four AC outlets for high-power devices, dual 2.1 amp USB charging ports, and two data port locations for optional HDMI, RJ-45, VGA or blank inserts if desired. Each Ashley unit includes adapters for Keystone, Siemon, Ortronics Tracjack, Panduit Pan-Net & Mini-Com, Commscope Systimax & Uniprise and Belden Nordx Ez-Mdvo. Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage to your devices. The unit comes with a 72" cord and is available with surface, under or bezel mounting options. Bezel mount requires special surface (2.19" x 11.40" hole size, 3/4" - 1 1/2" surface thickness). **Product Compatibility: M, D, MW, AO, A, O, C**

KEYSTONE DATA INSERTS FOR ASHLEY UNITS

Insert Type	Model Number	List
CAT 5e Jack	E-HRJ45-SM	89
CAT 6 Data Jack	E-HXJ6BK-SM	98
HDMI (Female to Female)	E-HDMIFF-SM	216

Specify	Notes

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Plug-In Power Solutions

STAFFORD

Color	Model Number	List
Black	E-STAFB-S	4,088



Specify	Notes
	Features four electrical AC 15 Amp power outlets, four USB ports each delivering 2.1 amps of charging power, and four blank single plates. Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage to your devices. Requires special surface (17.75" x 4.38" hole size). **Product Compatibility: M, D, MW, AO, A, O, C**

STAFFORD MINI

Color	Model Number	List
Black	E-STAFMB-S	1,963
White	E-STAFMW-S	1,963
Silver	E-STAFMS-S	1,892



Specify	Notes
• Color (Black, White or Silver)	Features two electrical AC 15 Amp power outlets, two USB ports each delivering 2.1 amps of charging power, and two blank single plates. Each USB port utilizes a Smart Device Recognition Chip to monitor and independently deliver the required amperage to your devices. Requires special surface (9.50" x 4.38" hole size). **Product Compatibility: M, D, MW, AO, A, O, C**

DATA PLATES FOR STAFFORD UNITS

Type	Model Number	List
CAT 5 Single Plate	E-DPCAT5-SP	102
CAT 6 Single Plate	E-DPCAT6-SP	108



CAT 5



CAT 6

Notes

CAT 6 comes with Extron plate mount for Stafford line.

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Power Data Boxes

INTERACT IV G2 POWER DATA BOX

Model Number	List
E-41U	1,966



Closed



Opened

Specify	Notes
• Finish Selection - Black, Silver, White • Power Selection - Corded or Hardwired	Features (4) power outlets, (1) convenience outlet (underneath unit), (2) 2.1amp USB, (2) keystone jack locations and (2) cord pass throughs ($^{7}/_{8}$" diameter each). A table cut-out size of 8.375" x 4.74" is recommended. 108" corded or hardwire options. **Product Compatibility: M, D, MW, AO, A, O, C**

KEYSTONE DATA INSERTS FOR INTERACT IV G2

Insert Type	Model Number	List
CAT 5e Jack	E-HRJ45-SM	89
CAT 6 Data Jack	E-HXJ6BK-SM	98
HDMI Jack	Coming Soon	TBA

Specify	Notes

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Power Data Boxes

CALIBRATE TABLE TOP POWER BOX

Model Number	List
E-PSBAIS	998



Closed



Opened



Top view



Plug

Specify	Notes
• Finish Selection - Black, Metallic Silver, Satin White	Features access door with interior storage for devices with (3) standard 15amp NEMA outlets, (2) 2.1 USBs, (2) 1 1/16 diameter pass through grommets and (2) Keystone style jack/device holes for data or HDMI jacks. Includes 15amp overload switch with reset, surge protection. Requires a table cut-out size of 11.58" x 4.47".

KEYSTONE DATA INSERTS

Insert Type	Model Number	List
CAT 5e Jack	E-HRJ45-SM	89
CAT 6 Data Jack	E-HXJ6BK-SM	98
HDMI Jack	HDMI-KEY-B	145



Specify	Notes

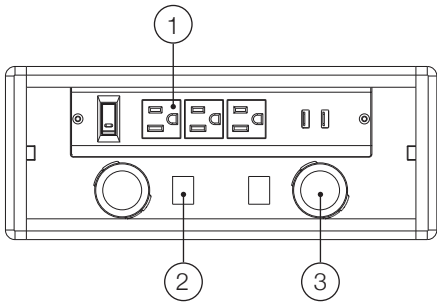

Calibrate Table Top Power Box

1. (3) 15amp Outlets, (2) 2.1 USBs, (1) Overload Switch
2. (2) Holes for Keystone Adapters
3. (2) Grommet Holes - 1 1/16" Inside Diameter

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Power Data Boxes

CALIBRATE TABLE TOP POWER BOX FOR DAISY-CHAIN OR HARDWIRED

Model Number	List
E-PSBC	1,389



Closed



Opened



Top view

Specify	Notes
• Finish Selection - Black, Metallic Silver, Satin White	Features access door with interior storage for devices with (2) standard 15amp NEMA outlets, (2) 2.1 USBs, (1) 1 1/4 diameter pass through grommets and (2) Keystone style jack/device holes for data or HDMI jacks. Includes 15amp overload switch with reset, surge protection. In-feeds must be purchased separately. To daisy chain, jumper must be purchased separately. Requires a table cut-out size of 11.58” x 4.47”.

MULTI-CIRCUIT DAISY CHAIN JUMPERS (FEMALE / FEMALE)

Length	Actual Length	Model Number	List
48	22.5	E-MCCFF-48	220
60	28.5	E-MCCFF-60	236
72	34.5	E-MCCFF-72	251



Specify	Notes

Calibrate Table Top Power Box (Daisy-Chain / Hardwire)

1. (2) 15amp Outlets, (2) 2.1 USBs
2. (2) Holes for Keystone Adapters
3. (1) Grommet Holes - 1 1/4” Inside Diameter

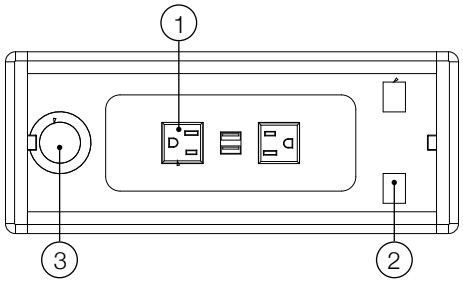

Calibrate Table Top Power Box Configuration Examples

For Hardwire:
Order Power Box +
Hardwired In-Feed



For Corded:
Order Power Box +
20amp Plug Feed

For Daisy-Chained:
Order Power Boxes +
Daisy Chain Jumper +
Hardwired In-Feed *or*
20amp Plug In-Feed



IN-FEEDS FOR TABLE TOP POWER BOXES

Type	Model Number	List
72” 20amp Plug In-Feed	E-SCIF-72	464
72” Hardwired In-Feed	E-MCIF-72	301
120” Hardwired In-Feed	E-MCIF-120	417



20amp Plug In-Feed

Hardwired In-Feed

Specify	Notes

© 2019, AIS, Inc.

Multi-Circuit Desking Electrical

MULTI-CIRCUIT DESKING ELECTRICAL POWER UNITS

Nominal Width	Actual Width	Model Number	List	Grade C Paint
36	28	E-OMCPK36	533	+25



Specify	Notes
• Paint Selection	Multi-Circuit Desking Electrical Power Units are an electrical system mounted directly to the worksurface. Power units include four duplex outlet hole covers. **Note:** Must specify Divi/MWall outlet type separately.
	Product Compatibility: M, D, MW, AO

MULTI-CIRCUIT DESKING ACCESS BOX

Model Number	List	Grade C Paint
O-AB	258	+25



Specify	Notes
• Paint Selection	Multi-Circuit Desking Access Housing allows for easy access to power and data delivered by the multi-circuit desking electrical system. Requires cut-out dimensions of 21 $^{3}/_{32}$ x 4 $^{7}/_{16}$
	Product Compatibility: M, D, MW, AO

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Revision Sep 2019
© 2019, AIS, Inc.

Electrical Jumpers

ELECTRICAL JUMPERS

Nominal Distance	Actual Length	Model Number	List
8	18	E-MX8W4PTPC18	156
11	21	E-MX8W4PTPC21	164
14	24	E-UN8W4VT16	202
27	37	E-MW8W4PJ18	208
33	43	E-MW8W4PJ24	223
35	45	E-MW8W4PJ24E	232
39	49	E-MW8W4PJ30	240
41	51	E-MW8W4PJ30E	244
45	55	E-MW8W4PJ36	247
47	57	E-MW8W4PJ36E	252
51	61	E-MW8W4PJ42	255
53	63	E-MW8W4PJ42E	259
57	67	E-MW8W4PJ48	275
59	69	E-MW8W4PJ48E	282
69	79	E-MW8W4PJ60	295
71	81	E-MW8W4PJ60E	311



Notes

Electrical Jumpers are used for connecting power units to each other in a plan. Electrical jumpers list both nominal and actual lengths. When planning to connect power units, allow for 10” of jumper length inside the power unit housings (5” on either side). For example, if two power units were 36” apart, the jumper needed would have to be 46” in length. Jumpers may be up to 4” longer than needed, but never shorter. When planning electrical jumper length please note that the jumper will need 5” nominal to reach into the power units. Please plan for an extra 10” in length from the edge of one power unit to the edge of the next power unit.

Product Compatibility: M, D, MW, AO, A, O

I-CONNECTOR

Model Number	List
E-UN8W4ICON	114



Notes

Product Compatibility: M, D, MW, AO

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

In-Feeds

EXTENDED BASE IN-FEEDS

L	Type	Model Number	List
324	Left	E-UN8W4BIFL324	825
120	Left	E-UN8W4BIFL120	436
324	Right	E-UN8W4BIFR324	825
120	Right	E-UN8W4BIFR120	436
120	Side-Mounted	E-UN8W4BIFS120	578
264	Side-Mounted	E-UN8W4BIFS264	879
180	Ceiling	E-UN8W4CIF180	629
264	Ceiling	E-UN8W4CIF264	915



Notes

Product Compatibility: M, D, MW, AO, A, O

SIDE MOUNTED BASE IN-FEED

L	Type	Model Number	List
72	Standard	E-UN8W4BIFS	351
72	New York City	E-HM8W4BIFSNY	702



Notes

Side Mounted Base In-Feeds provide interface with building power at the end of the power units and mounts to the powerway at jumper location. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box. See NY In-Feed part number.

Product Compatibility: M, D, MW, AO, A, O

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Data Plate Kits, Data Housing Units, Powerway Dust Covers

DATA PLATE KIT

Item	Model Number	List
6 Port Data Gang Plate	E-HDP6B-SM	25
CAT 5e Jack	E-HRJ45-SM	89
CAT 6 Data Jack	E-HXJ6BK-SM	98
Hole Blank (10 Pack)	E-SFBB10-SM	59



Notes

Single Data Plate Kit has six ports for modular jacks. Bezel screws directly to the access box in pre-drilled and tapped hole pattern. RJ-45 jacks can be used in place of RJ-11 jacks.

Product Compatibility: M, O, Multi-Circuit Electrical Units

SURFACE MOUNT DATA HOUSING UNITS

Port Quanity	Model Number	List
1	E-ISB1BK-SM	92
4	E-ISB4BK-SM	92
6	E-ISB6BK-SM	92



Notes

Surface Mount Data Housing Units have a low-profile design, are ADA compliant and easily mount to multiple surfaces. Units include double-sided tape and mounting screws for easy installation. Base includes tie wrap anchors at rear cable entry point for 4" cable ties (included). Compatible with standard jacks. Surface mount data housing units are only available in black.

Product Compatibility: M, D, MW, AO, A, O

POWERWAY DUST COVER

Model Number	List
E-UN8W4DC	12



Notes

Powerway Dust Covers are ordered when capping off the end of a powerway is required by local electrical code.

Product Compatibility: M, D, MW, AO, O

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Duplex Outlets

DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4DO1	54
2	E-MW8W4DO2	54
3	E-MW8W4DO3	54
4	E-MW8W4DO4	54



Notes

Duplex Outlets are available at designated circuits 1 through 4. Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways. All duplex outlets have black faces. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange. Outlets are screw mounted to powerway. Duplex outlets are standard 15 amp outlets.

Product Compatibility: D, MW, Multi-Circuit Electrical Units

CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4T24DO1	63
2	E-MW8W4T24DO2	63
3	E-MW8W4T24DO3	63
4	E-MW8W4T24DO4	63



Notes

In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting. Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4. If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5. Outlets must have the "controlled" symbol for identification purposes.

Product Compatibility: D, MW, Multi-Circuit Electrical Units

USB OUTLETS

Line	Model Number	List
1	E-UN8W4USB01	234
2	E-UN8W4USB02	234
3	E-UN8W4USB03	234
4	E-UN8W4USB04	234



Notes

USB Outlets bring charging options to panel power distribution systems. The USB Outlets provide convenient charging power access through dual ports on the face of the receptacle. The USB Outlets offer a total of 2 Amps between two USB charging ports. The USB Outlets are UL and FCC Part 15A approved.

Product Compatibility: D, MW, Multi-Circuit Electrical Units

DUPLEX OUTLET HOLE COVERS

Model Number	List
E-UNWC	21



Specify

- Paint Selection for Hole Cover

Notes

Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six). 24"W panels only include three duplex outlet hole covers. Order extra hole covers separately only when required.

Product Compatibility: D, MW, Multi-Circuit Electrical Units

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Wall Mounted Tackboards and Shared Open Overhead Tackboards

WALL MOUNTED TACKBOARDS

		Without Cord Groove	With Cord Groove				
H	W	Model Number	Model Number	List	C.O.M Fabric	Grade C Fabric	Grade D Fabric
16	24	C-TACK1624	C-TACKBG1624	221	-5	+13	+24
16	30	C-TACK1630	C-TACKBG1630	231	-5	+13	+24
16	36	C-TACK1636	C-TACKBG1636	238	-5	+13	+24
16	42	C-TACK1642	C-TACKBG1642	254	-5	+13	+24
16	48	C-TACK1648	C-TACKBG1648	265	-5	+13	+24
16	54	C-TACK1654	C-TACKBG1654	298	-5	+13	+24
16	60	C-TACK1660	C-TACKBG1660	333	-5	+13	+24
18	24	C-TACK1824	C-TACKBG1824	272	-5	+13	+24
18	30	C-TACK1830	C-TACKBG1830	287	-5	+13	+24
18	36	C-TACK1836	C-TACKBG1836	298	-5	+13	+24
18	42	C-TACK1842	C-TACKBG1842	313	-5	+13	+24
18	48	C-TACK1848	C-TACKBG1848	328	-5	+13	+24
18	54	C-TACK1854	C-TACKBG1854	340	-5	+13	+24
18	60	C-TACK1860	C-TACKBG1860	350	-5	+13	+24
20	24	C-TACK2024	C-TACKBG2024	295	-5	+13	+24
20	30	C-TACK2030	C-TACKBG2030	311	-5	+13	+24
20	36	C-TACK2036	C-TACKBG2036	323	-5	+13	+24
20	42	C-TACK2042	C-TACKBG2042	336	-5	+13	+24
20	48	C-TACK2048	C-TACKBG2048	352	-5	+13	+24
20	54	C-TACK2054	C-TACKBG2054	364	-5	+13	+24
20	60	C-TACK2060	C-TACKBG2060	375	-5	+13	+24

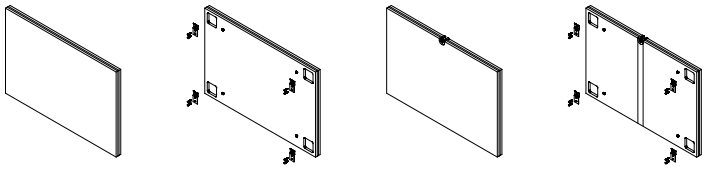

(Front View) (Rear View) (Front View) (Rear View)

Without Tasklight Cord Groove With Tasklight Cord Groove

Specify	Notes
• Fabric Selection • Paint Selection for Tasklight Cord Grove	Wall Mounted Tackboards are 1" thick and available with or without a 2" wide painted tasklight cord groove that runs down the back side of the tackboard. Tackboard mounts to wall via four mounting clips. **Product Compatibility: M, D, MW, AO**

SHARED OPEN OVERHEAD TACKBOARDS

Used With	Model Number	List	C.O.M Fabric	Grade C Fabric	Grade D Fabric
16 x 36	C-SOHTK1636	215	-5	+13	+24
16 x 42	C-SOHTK1642	237	-5	+13	+24
16 x 48	C-SOHTK1648	243	-5	+13	+24
16 x 60	C-SOHTK1660	258	-5	+13	+24

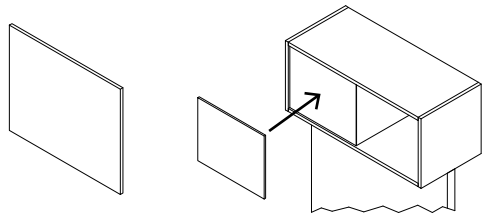

Specify	Notes
• Fabric Selection	Shared Open Overhead Tackboards fill in the unused side of a shared open overhead to provide a tackable surface for the user. Shared open overhead tackboards are sold individually. **Product Compatibility: M, D, MW, AO**

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

CPU Holders

EASY ACCESS CPU HOLDER

Mounting Type	Model Number	List
17.75” Track	A-CPUEA	738



Notes

Easy Access CPU Holder protects your CPU from damaging environmental factors. Keeping it off the floor and out of the way. Glide tracks and 360º swivel mechanisms provide easy access to the back of the CPU. Vertically mounts to underside of worksurface. No tools needed to adjust. The glide track is 17.75”. Adjustable width 2.5” - 8.25”. Adjustable height 13” - 21”. Load capacity is 100 lbs.

Product Compatibility: M, D, MW, AO, A, O

LOCKABLE CPU HOLDER

Mounting Type	Model Number	List
17” Track	A-CPULK	1,307



Notes

Lockable CPU Holder offers secure CPU storage. Protects CPU not only from damaging environmental factors but also from theft. Glide tracks and 360º swivel mechanisms provide easy access to the back of the CPU. Vertically mounts to underside of worksurface. No tools needed to adjust. The glide track is 17”. Heavy duty locking knob. Steel holder with fiberglass reinforced resin-composite arm. Adjustable width 3.5” - 9.3”. Adjustable height 12.5” - 22.5”. Load capacity is 85 lbs.

Product Compatibility: M, D, MW, AO, A, O

ELEVATOR CPU HOLDER

Mounting Type	Model Number	List
17” Track	A-CPUEL	813



Notes

Elevator CPU holder secures and stores CPUs beneath your worksurface. Cable connections and power buttons are easily accessed once your CPU is in the Elevator CPU holder. Holds up to 50lbs.

Product Compatibility: A, O

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Adjustable Footrest and Anti-Fatigue Mats

ADJUSTABLE FOOTREST

Model Number	List
A-FOOTR	418



Notes

Adjustable Footrest increases comfort and decreases fatigue by redistributing body weight for healthier positioning of the spine and legs. Ideal for users who cannot rest feet comfortably on the floor.

Product Compatibility: M, D, MW, AO, A, O, C

ANTI-FATIGUE MAT

W	D	Thickness	Model Number	List
34	20	3/4	A-HF342075	160



Notes

Custom blended medium density polyurethane foam. High tear strength polyurethane outer membrane. Available in black only.

Product Compatibility: M, D, MW, AO, A, O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Monitor Arms

SINGLE MONITOR ARM

Model Number	List
A-ERSMASB	597



Notes

Suitable for 10” - 28” size range LCD screens. Load capacity of 19lbs per arm. Features 180 degree rotation at the mounting base and extension. VESA monitor mount for 75mm and 100mm standard. Available mounting options include c-clamp, grommet or bolt through. Available in silver only. Single monitor arm features a snap-in/removable cord clip for wire management.

Product Compatibility: M, D, MW, AO, A, O, C

DUAL MONITOR ARM

Model Number	List
A-ERDMASB	1,097



Notes

Suitable for 10” - 28” size range LCD screens. Load capacity of 19lbs per arm. Features 180 degree rotation at the mounting base and extension. VESA monitor mount for 75mm and 100mm standard. Available mounting options include c-clamp, grommet or bolt through. Available in silver only.

Product Compatibility: M, D, MW, AO, A, O, C

M9 DOUBLE MONITOR ARM

Model Number	List
A-ERDMAM9	1,275



Notes

Suitable for LCD screens up to 27”. Load capacity of 14.3 lbs. per monitor. Features 180 degree rotation at the mounting base and extension. Monitors mount with M4 screws to a VESA bracket. Mounts with c-clamp on the table edge or through a grommet hole. Available in silver only.

Product Compatibility: M, D, MW, AO, A, O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Tasklights

STANDARD TASKLIGHT

Overhead Width	Actual Width	Model Number	List
24, 30	23	A-TL24	191
36, 42	35	A-TL36	250
48, 60	47	A-TL48	281



Notes

Tasklights provide light for shadows thrown by shelves and flipper units. Tasklight mounts to the under side lip of the AIS shelf pan via bending spring bars at either end. Utilizes a 15 (Miniature Bi-Pin Base) 5/8" Diameter.

Product Compatibility: M, D, MW, AO, C

TASKLIGHT CORD MANAGERS

H	Used With	Model Number	List	Grade C Paint
3	Matrix, Divi, AO2	A-DVVWMTL03	41	+20
11	Matrix, Divi, AO2	A-DVVWMTL11	48	+20
16	Matrix, Divi, AO2	A-DVVWMTL16	58	+20
3	MWall	A-SAVWMTL03	43	+20
11	MWall	A-SAVWMTL11	48	+20
16	MWall	A-SAVWMTL16	58	+20



Notes

Tasklight Cord Managers engage to panel hanger frame slots. Tasklight cord managers are non-handed. Hanger frames can accommodate only one tasklight cord manager and will not fit behind tackboards. Painted black as a standard, all other trim colors are Grade C upcharged. Use 3" for managing cords above tackboards or double them up when a full height manager is not required. Use 11" for a full height finished aesthetic for managing tasklight cords under half height shelves on 50"/53" high panels. Use 16" for a full height finished aesthetic for managing tasklight cords under full height shelves, flipper doors, or under half height shelves hung level with full height shelves on 65"/66"/67" high panels.

Product Compatibility: M, D, MW, AO

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Tasklights

LED DESK LAMP (CLAMP BASE)

Mounting Type	Model Number	List
Clamp	A-DLWL01CC	1,761



Notes

LED Desk Lamp provides the user control over ambient lighting levels while at task. This double extension counter-balanced lamp offers various options while providing exceptional illumination. Ergonomic styling and energy star compliant. With patented refractive LED lens technology, the LED Desk lamp eliminates light pooling and provides an excess of 50,000 hours of life at full power. Clamp mount easily attaches to worksurface edge, 41" total length.

Product Compatibility: M, D, MW, AO, A, O, C

LED DESK LAMP (DESK BASE)

Mounting Type	Model Number	List
Desk Base	A-DLWL01DB	1,809



Notes

LED Desk Lamp provides the user control over ambient lighting levels while at task. This double extension counter-balanced lamp offers various options while providing exceptional illumination. Ergonomic styling and energy star compliant. With patented refractive LED lens technology, the LED Desk lamp eliminates light pooling and provides an excess of 50,000 hours of life at full power. Desk Base sits on the worksurface, 41" total length.

Product Compatibility: M, D, MW, AO, A, O, C

LED DESK LAMP (SHORT ARM CLAMP BASE)

Mounting Type	Model Number	List
Short Arm Clamp	A-DLWL02CC	1,761



Notes

LED Desk Lamp provides the user control over ambient lighting levels while at task. This double extension counter-balanced lamp offers various options while providing exceptional illumination. Ergonomic styling and energy star compliant. With patented refractive LED lens technology, the LED Desk lamp eliminates light pooling and provides an excess of 50,000 hours of life at full power. Short Arm Clamp mount easily attaches to the worksurface edge, 36" total length.

Product Compatibility: M, D, MW, AO, A, O, C

LIM PERSONAL DESK LAMP

Model Number	List
A-DLLED	1,068



Notes

Pivoting, scratch resistant steel base. Aluminum arm with clear lens and full range dim control rotates 360 degrees around magnetic attachment to the base. Comes with a removable, silvertone cord and one wire management clip.

Product Compatibility: M, D, MW, AO, A, O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Tasklights

OVERHEAD LED LAMP

Length	Model Number	List
24	A-LEDTL-61024	445
40	A-LEDTL-61540	659



Notes

LED tasklights are 1-1/4″ wide, and 3/8″ in thickness and come in 24 and 40 inch lengths. Brushed aluminum with black trim. Attachable to the underside of overhead cabinet via the built-in magnets, or mounted to non-metal surfaces using the adjustable mounting bracket. Feature 100 lm/w with warm white and white color temps and convenient one-touch On/Off and Touch-and-Hold dimmer. Power-in and power-switch are reversible. Power cord is 10’ in length.

Product Compatibility: M, D, MW, AO, C

OVERHEAD LED TASKLIGHT JUMPER CABLE

Model Number	List
A-LEDTL-6-DCW	87



Notes

Product Compatibility: M, D, MW, AO, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Pelican and Pencil Drawers

PELICAN DRAWER I

H	W	D	File Rods	Model Number	List
10	19 1/4	23 3/8	No	A-PDP1	1,086
10	19 1/4	23 3/8	Yes	A-PDP1R	1,116



Notes

Pelican Drawer I provides secure storage for large items such as purses, laptops or hanging files. Features fully concealed drawer slides and a spacious segmented tray section. Soft durable drawer front protects clothing and chair arms. Key core interchangeable locks compatible with most office furniture systems. Mount under any 23 3/8" deep surface. Fits all AIS furniture systems. 23 3/8"L x 19 1/4"W x 2 1/4"H (front). Bin Height 10". Leg Room 13" (front edge to bin). May not be keyed alike to other storage units.

Product Compatibility: M, D, MW, AO, C

PELICAN DRAWER II

H	W	D	Model Number	List
10	19 1/4	16 1/4	A-PDP2	1,216



Notes

Pelican Drawer I provides secure storage for large items such as purses, laptops or hanging files. Features fully concealed drawer slides and a spacious segmented tray section. Soft durable drawer front protects clothing and chair arms. Key core interchangeable locks compatible with most office furniture systems. Mount under any 23 3/8" deep surface. Fits all AIS furniture systems. 23 3/8"L x 19 1/4"W x 2 1/4"H (front). Bin Height 10". Leg Room 13" (front edge to bin). May not be keyed alike to other storage units.

Product Compatibility: M, D, MW, AO, C

PENCIL DRAWER

H	W	D	Model Number	List
2 1/4	21 1/4	16 1/4	A-PDRWP	195



Notes

Pencil Drawer provides convenient, low profile storage of loose items. Constructed of rigid, durable PVC with black textured finish. Metal slides mount underneath worksurfaces with screws provided. Pencil drawer measures 16 1/4"D x 21 1/4"W x 2 1/4"H. Plan pencil drawer location around worksurface support elements.

Product Compatibility: M, D, MW, AO, C

SPIN-OUT DRAWERS

W	D	Type	Model Number	List
7 1/2	7 1/2	Radius Jr.	A-ROKJ	137
13 5/8	8 1/4	Radius	A-ROK	154



Radius Jr.



Radius

Notes

Product Compatibility: A, O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Revision Sep 2019
© 2019, AIS, Inc.

Keyboard Arms

STANDARD KEYBOARD ARM

Model Number	List
A-KEYBZ	453

Notes

Standard Keyboard Arm mounts to underside of worksurfaces to support standard computer keyboards. Keyboard platform area behind wristrest measures 8 1/2" deep x 20" wide. Keyboard tray includes a factory mounted, synthetic leather wristrest. Order extended arm for use on all curvilinear corner worksurfaces except cockpit corners. Available in black only.

Product Compatibility: M, D, MW, AO, O

STANDARD EXTENDED KEYBOARD ARM

Model Number	List
A-KEYBZE	766



Notes

Standard Extended Keyboard Arm mounts to underside of worksurfaces to support standard computer keyboards. Keyboard platform area behind wristrest measures 8 1/2" deep x 20" wide. Keyboard tray includes a factory mounted, synthetic leather wristrest. Order extended arm for use on all curvilinear corner worksurfaces except cockpit corners. Available in black only.

Product Compatibility: M, D, MW, AO, O

STANDARD MOUSE TRAY

Model Number	List
A-MSETS	134



Notes

Standard Mouse Tray mounts to either the left or right side of keyboard tray platform with screws to service both left and right handed users. Mouse area measures 7 1/4" x 7 1/4". Mouse tray swivels around vertical axis 270° and has 30° of tilt around the horizontal axis (15° above keyboard tray plane to 15° below plane, independent of keyboard tray tilt). Available in black only.

Product Compatibility: M, D, MW, AO, O

V SERIES KEYBOARD ARM

Mouse Tray	Model Number	List
Fixed	A-KTOVSF	1,001
Adjustable	A-KTOVSA	1,065



Notes

V Series Keyboard Arm mounts to the underside of worksurfaces to support computer keyboards. Arm may be specified with either a fixed or adjustable mouse tray, which may be installed on the left or right side of the keyboard tray. Available in black only.

Product Compatibility: M, D, MW, AO, O

V SERIES EXTENDED KEYBOARD ARM

Mouse Tray	Model Number	List
Fixed	A-KTOVXF	1,086
Adjustable	A-KTOVXA	1,152



Notes

V Series Extended Keyboard Arm mounts to the underside of worksurfaces to support computer keyboards. Arm may be specified with either a fixed or adjustable mouse tray, which may be installed on the left or right side of the keyboard tray. Available in black only.

Product Compatibility: M, D, MW, AO, O

V SERIES SIT-STAND KEYBOARD ARM

Mouse Tray	Model Number	List
Fixed	A-KTOVSSF	1,065
Adjustable	A-KTOVSSA	1,203



Notes

V Series Sit-Stand Keyboard Arm mounts to the underside of worksurfaces to support computer keyboards. Arm may be specified with either a fixed or adjustable mouse tray, which may be installed on the left or right side of the keyboard tray. Available in black only.

Product Compatibility: M, D, MW, AO, O

© 2019, AIS, Inc.

Worksurface Rails

WORKSURFACE RAIL

D	Model Number	List	Grade C Paint
24	A-WSRAIL24	259	+25
30	A-WSRAIL30	269	+25
36	A-WSRAIL36	282	+25
42	A-WSRAIL42	294	+25
48	A-WSRAIL48	396	+25
54	A-WSRAIL54	408	+25
60	A-WSRAIL60	420	+25
66	A-WSRAIL66	432	+25
72	A-WSRAIL72	444	+25



Specify	Notes
• Paint Selection	Worksurface Rails mount beside a worksurface and are secured from underneath the surface. This allows for accessories to be mounted between surfaces, and to prevent drilling holes in the finish. The rails may also be shared in the middle of two surfaces. Worksurface rails come with the rail, screws, mounting brackets and end caps. Rail mounted accessories are sold separately. Plan for 1 5/16" mounting space for the brackets. **Product Compatibility: M, D, MW, AO**

ADDITIONAL MOUNTING BRACKET

Model Number	List	Grade C Paint
A-WSRAILMK	76	+25



Specify	Notes
• Paint Selection	Worksurface Rail mounting brackets require a 2"W x 1 5/16"D space under the surface. Please plan for this when specifying. **Product Compatibility: M, D, MW, AO**

EXTENDED WORKSURFACE RAIL (SPANNER)

D	Model Number	List	Grade C Paint
25.5	A-WSRAIL24E	262	+25
31.5	A-WSRAIL30E	272	+25
37.5	A-WSRAIL36E	285	+25
43.5	A-WSRAIL42E	297	+25
49.5	A-WSRAIL48E	401	+25
55.5	A-WSRAIL54E	412	+25
61.5	A-WSRAIL60E	424	+25
67.5	A-WSRAIL66E	436	+25
73.5	A-WSRAIL72E	450	+25





Specify	Notes
• Paint Selection	Extended worksurface rails compensate for the extra space added to the depth of stations when using worksurface rails down the spine. **Product Compatibility: M, D, MW, AO**

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Sep 2019
© 2019, AIS, Inc.

Worksurface Mounted Tool Rails

WORKSURFACE MOUNTED TOOL RAIL (CLAMP MOUNT)

W	Model Number	List	Grade C Paint
24	A-WSMTR24	296	+25
30	A-WSMTR30	318	+25
36	A-WSMTR36	340	+25
42	A-WSMTR42	362	+25
48	A-WSMTR48	382	+25
54	A-WSMTR54	404	+25
60	A-WSMTR60	426	+25
66	A-WSMTR66	536	+25
72	A-WSMTR72	559	+25



Specify	Notes
• Paint Selection	Worksurface Mounted Tool Rails mounts a tool rail directly to a worksurface or worksurface rail, which eliminates the need of panels for support. Clamping rail is clamped onto the surface using supplied hardware. Worksurface rail tool rails use beackets in conjunction with the worksurface rail to be installed. Worksurface mounted tool rails are double sided, which allows accessories to mount onto either side. 66” and 72” wide rails come with three sets of mounting hardware. **Product Compatibility: M, D, MW, AO, A, O**

WORKSURFACE MOUNTED TOOL RAIL (RAIL MOUNT)

W	Model Number	List	Grade C Paint
24	A-WSRMTR24	296	+25
30	A-WSRMTR30	318	+25
36	A-WSRMTR36	340	+25
42	A-WSRMTR42	362	+25
48	A-WSRMTR48	382	+25
54	A-WSRMTR54	404	+25
60	A-WSRMTR60	426	+25
66	A-WSRMTR66	536	+25
72	A-WSRMTR72	559	+25



Specify	Notes
• Paint Selection	Worksurface Mounted Tool Rails mounts a tool rail directly to a worksurface or worksurface rail, which eliminates the need of panels for support. Clamping rail is clamped onto the surface using supplied hardware. Worksurface rail tool rails use beackets in conjunction with the worksurface rail to be installed. Worksurface mounted tool rails are double sided, which allows accessories to mount onto either side. 66” and 72” wide rails come with three sets of mounting hardware. **Product Compatibility: M, D, MW, AO**

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Paper Flow Elements

STANDARD TOOL BAR ACCESSORIES

Type	Model Number	List
Portrait Paper Tray	P-MXTBPT	100
Landscape Paper Tray	P-MXTBLPT	100
Diagonal Folder Sorter	P-MXTBDFS	115
Binder Holder	P-MXTBBH	62
Pencil Holder	P-MXTBPENH	41
Accessories Tray	P-MXTBAT	76
CD Holder	P-MXTBCDH	58
Phone Holder	P-MXTBPH	82
Cup Holder	P-MXTBCH	48



Portrait Paper Tray



Landscape Paper Tray



Diagonal Folder Sorter



Binder Holder



Pencil Holder



Accessories Tray



CD Holder



Phone Holder



Cup Holder

Specify	Notes
• Finish Selection: Black or Clear	Standard tool bar accessories can be universally used on all AIS tool rails and also Matrix utility tiles. Available in black or clear. **Product Compatibility: M, D, MW, AO, A, O**

METAL TOOL BAR ACCESSORIES

Type	Model Number	List	Grade C Paint
Portrait Paper Tray	A-TBPPT	110	+10
Landscape Paper Tray	A-TBLPT	110	+10
Diagonal Folder Sorter	A-TBDFS	114	+10
Binder Holder	A-TBBH	110	+10
Pencil Holder	A-TBPT	77	+10
Folder Box	A-TBFH	100	+10
18” Mini Shelf	P-MXTBMSHF18	181	+10
24” Mini Shelf	P-MXTBMSHF24	246	+10
30” Mini Shelf	P-MXTBMSHF30	256	+10
36” Mini Shelf	P-MXTBMSHF36	292	+10



Portrait Paper Tray



Landscape Paper Tray



Diagonal Folder Holder



Binder Holder



Pencil Tray



Folder Box


Mini Shelf

Specify	Notes
• Paint Selection	Metal tool bar accessories can be universally used on all AIS tool rails. Available painted in any AIS paint color. 18”W Mini-Shelf for use with all tool tile sizes. 24”W Mini Shelf for use with 30, 36, 42 and 48 tool tile sizes. 30”W Mini Shelf for use with 36, 42, 48 tool tile sizes. 36”W Mini Shelf for use with 42 and 48 tool tile sizes. **Product Compatibility: M, D, MW, AO, A, O**

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Sep 2019
© 2019, AIS, Inc.

Credenza and Pedestal Cushions

CREDENZA CUSHIONS

D	W	Model Number	List	Upholstery Grade B	Upholstery Grade C	Upholstery Grade D	Upholstery Grade E
18	18	S-BCUSH1818	708	+51	+102	+152	+203
18	21	S-BCUSH1821	745	+51	+102	+152	+203
18	24	S-BCUSH1824	760	+51	+102	+152	+203
18	27	S-BCUSH1827	773	+51	+102	+152	+203
18	30	S-BCUSH1830	787	+62	+124	+186	+248
18	33	S-BCUSH1833	798	+62	+124	+186	+248
18	36	S-BCUSH1836	847	+62	+124	+186	+248
18	42	S-BCUSH1842	878	+73	+146	+208	+270
18	48	S-BCUSH1848	925	+73	+146	+208	+270
18	54	S-BCUSH1854	961	+73	+146	+208	+270
18	60	S-BCUSH1860	985	+95	+160	+228	+298
18	66	S-BCUSH1866	1,048	+95	+160	+228	+298
18	72	S-BCUSH1872	1,080	+95	+160	+228	+298



Specify	Notes
• Upholstery Selection	Credenza are a fabric covered 1" thick foam cushion. Cushions include Velc for mounting. **Product Compatibility: A, O, C**

PEDESTAL CUSHIONS

D	W	Model Number	List	Upholstery Grade C	Upholstery Grade D	Upholstery Grade E
22	15	S-PEDCUSHIONJ1	756	+51	+102	+152
18	16	C-PEDCUSHION	756	+51	+102	+152



Specify	Notes
• Upholstery Selection	Credenza and pedestal cushions are a fabric covered 1" thick foam cushion. Cushions include Velc for mounting. **Product Compatibility: A, O, C**

SHARED CREDENZA CUSHIONS

D	W	Model Number	List	Upholstery Grade C	Upholstery Grade D	Upholstery Grade E
36	30	S-BCUSH3630	1,176	+95	+160	+228
36	36	S-BCUSH3636	1,206	+95	+160	+228
36	42	S-BCUSH3642	1,217	+95	+160	+228



Specify	Notes
• Upholstery Selection	Credenza are a fabric covered 1" thick foam cushion. Cushions include Velc for mounting. **Product Compatibility: A, O, C**

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Flipper Door Security Panels, Lock Cores and Keys, Shelf Dividers, Pedestal Extension Shrouds

FLIPPER DOOR SECURITY PANEL

W	Used With	Model Number	List	Grade C Paint
24	Matrix, MWall, AO2	S-FDBPU24	286	+12
30	Matrix, MWall, AO2	S-FDBPU30	310	+12
36	Matrix, MWall, AO2	S-FDBPU36	315	+12
42	Matrix, MWall, AO2	S-FDBPU42	333	+12
48	Matrix, MWall, AO2	S-FDBPU48	372	+12
60	Matrix, MWall, AO2	S-FDBPU60	472	+12
24	Divi	S-FDBPUDV24	286	+12
30	Divi	S-FDBPUDV30	310	+12
36	Divi	S-FDBPUDV36	315	+12
42	Divi	S-FDBPUDV42	333	+12
48	Divi	S-FDBPUDV48	372	+12
60	Divi	S-FDBPUDV60	472	+12



Specify

- Paint Selection

Notes

Flipper Door Security Panel is retrofitable to all AIS flipper door units. Panel clips into back lip of the cover unit and is screw mounted to the bottom shelf pan. All hardware needed to install is provided.

Product Compatibility: M, D, MW, AO

LOCK CORES AND KEYS

Key Type	Model Number	List
Core with 2 keys	S-W1CORE1	13
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2	23
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3	34
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4	46
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5	57
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6	67
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7	78
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8	90
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9	100
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10	112
Master Key	RS-W1MKEY	9
Core Removal Key	RS-W1CRKEY	9
Replacement Key	RS-WK _ _ _ (Key Number)	15



Notes

Lock Cores & Keys are included with all AIS storage files and overhead flipper units, but may be ordered separately for keying stations alike or for replacement purposes. Keys and Lock Cores are available in #'s 226 through 425. When ordering keyed alike sets, be sure to also order an LL core removal key. The core removal key is needed to remove the existing core from the lock housing in order to replace with a new core. Order sets based on quantity of storage items to be keyed alike.

Product Compatibility: M, D, MW, AO, A, O, C

SHELF DIVIDER

Model Number	List	Grade C Paint
S-SHFDIV12	101	+10



Specify

- Paint Selection

Notes

Shelf Divider mounts to mid-height shelf decks and may also be used inside of complete flipper bins. No hardware necessary. Divider simply snaps into place. Divider is 5 5/8" tall and designed to finish at the same height as a mid-height shelf end.

Product Compatibility: M, D, MW, AO

PEDESTAL EXTENSION SHROUD

Model Number	List	Grade C Paint
S-PEDJFB	119	+5

Specify

- Paint Selection

Notes

Pedestal Extension Shroud is mounted to the back edge of the pedestal with two #10 x 1/2" self-tapping pan head screws or magnetic tape (included). Extension is 2" deep. Extension kit masks the gap between back of pedestal and panel face. Shroud is not handed.

Product Compatibility: M, D, MW, AO

Revision Sep 2019
© 2019, AIS, Inc.

Coat and Bag Hooks, Cable Grips and Anti-Slip Bumpers

PANEL FRAME COAT HOOK

Model Number	List	Grade C Paint
A-CHM2	95	+5

Notes

Panel Frame Coat Hook mounts into the slotted vertical rail on a panel. May be used on all AIS panel systems.

Product Compatibility: M, D, MW, AO

WORKSURFACE BAG HOOK

Model Number	List
A-WSPH	211



Specify	Notes
• Paint Selection	Worksurface Bag Hook allows for easy storage of bags by providing a hook mounted under the worksurface. Worksurface bag hook installs without tools by clamping to the worksurface.

Product Compatibility: M, D, MW, AO, C

CABLE GRIP

Model Number	List
A-CBLGRP	20



Notes

Cable Grips are a unique way to easily store your cables out of sight. The Cable Grip is simply screwed to the surface with four wood screws and the wires simply snap into the storage position between the loops. Multiple cables can easily be stored in each position. Cable Grip is only available in black.

Product Compatibility: M, D, MW, AO, C

ADHESIVE BACK ANTI-SLIP BUMPER

Model Number	List
RH-95495K728	7



Notes

Adhesive-Back Anti Slip Bumper have a convienent adhesive back that allows you to add these bumpers to glides on any product to prevent sliding on smooth surfaces. 1 per package. 1 1/4”W x 7/64”H.

Product Compatibility: M, D, MW, AO

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

Grommet Hole Covers, Replacement Pulls, Frameless Glass Alignment Kits, Ganging Bolts

GROMMET HOLE COVERS

Color	Model Number	List
Black	W-GRC3B	26
Grey	W-GRC3GV1	26
White	W-GRC3W	26



Specify	Notes
• Color Selection	Grommet Hole Covers for cord management may be specified when ordering worksurfaces. Grommet covers are included when worksurfaces are ordered with grommets. Order separately only if extra covers are required or if retrofitting grommets in the field. Grommet holes required are 2 3/4" outside diameter with a 2 5/8" inside diameter (inside sleeve). Grommet covers are available in grey, black and white. **Product Compatibility: M, D, MW, AO, C**

REPLACEMENT PULLS

Style	Model Number	List
Loop	RS-PEDHANDLEA	20
Bar	RS-PEDHANDLES-A	20

Loop Pull

Bar Pull

Notes

Pulls may be ordered as needed for aesthetic purposes.Laminate case construction products (items beginning with "C-") automatically ship with straight bar pulls and metal case construction products (items beginning with "S-") automatically ship with loop pulls. Pulls can be easily replaced as needed in the field.

Product Compatibility: M, D, MW, AO, A, O

FRAMELESS GLASS ALIGNMENT KITS

Glass Thickness	Model Number	List
1/4	A-FGAC14	9
3/8	A-FGAC38	9



Notes

Frameless Glass Alignment Clips couple 2 pieces of glass together, providing alignment for framelss glass screens in a straight condition. Clip are available for 1/4" and 38" thick material. Clips are made of clear poly carbonate.

Product Compatibility: M, D, MW, AO

GANGING BOLT

Model Number	List
RH-98002A208	9



Notes

Laminate Casegood Ganging Bolt gangs two laminate construction casegood units with standard 3/4" thick wall construction together by way of a field drilled 1/4" diameter hole. Combination drive style on both ends, 10-24 thread, adjusts from 1 1/2" to 1 5/8".

Product Compatibility: O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

Revision Sep 2019
© 2019, AIS, Inc.

Hospitality/Catering Cart and Mobile White Boards

HOSPITALITY/CATERING CART

Model Number	List
A-HCC	3,380



Notes

Includes cart, shelf and shelf hardware. White laminate with white 1mm edge-band. Standard with dual handles. Rails and handles are aluminum and available in metallic trim colors only. Standard with center adjustable shelf; 3 1/2" (89mm) increments. Each cart end has a upper and lower open stationary shelves with shelf rails to accommodate beverage containers. Optional casters or glides are field interchangeable. Optional glides are available in black with 1/2" (13mm) height adjustment. Ships assembled.

Product Compatibility: M, D, MW, AO, A, O, C

MOBILE WHITE BOARD

H	W	D	Model Number	List
75	45	28	A-RWB754528	3,333
75	88	28	A-RWB758828	5,582





Notes

Includes frame and attached, two-sided laminate writing surface/center board with attached marker tray. Center board has pins to allow hanging of standard size easel paper pad. Writable surface is 0.64" thick with 1mm bright white edgeband and a 31" or 43"W x 43"H writing surface. Easel marker tray is 30" or 73"W x 1 3/8"H, accessible from one side only. Metallic silver aluminum frame. Casters (two locking/two non-locking) available in black only. Easel can be used as a projection screen and/or space divider. Easel height with information board(s) attached is 78". Ships unassembled.

Product Compatibility: M, D, MW, AO, A, O, C

Product Compatibility Key:	
M = Matrix	A = Aloft
D = Divi	O = Oxygen
MW = MWall	C = Calibrate
AO = AO2	

© 2019, AIS, Inc.

National Showrooms:

Leominster
AIS Headquarters
25 Tucker Drive
Leominster, MA 01453

Chicago
The Merchandise Mart
Suite 1086
Chicago, Illinois 60654

New York
AIS New York
257 Park Avenue South
New York, New York 10010

Washington, D.C.
AIS Washington, D.C.
1400 I St, NW, Suite 750
Washington, D.C. 20005

GSA Sales
GSA Contract GS-29F-0006K
FSC Group 71,
Part 1 Office Furniture

For additional information on AIS:
Dealer Showrooms, Representative Directory, Project Case Studies, Online Catalog & Product Showcase
Visit: **www.ais-inc.com**

AIS

800.434.7400 | 978.562.7500 | Fax: 978.562.0811 | www.ais-inc.com | September 2019