MWALL

October 2019 Price List

AIS

PRODUCT INFORMATION

MWall Statement of Line 3
MWall Finish Options 6

PANELS

MWall Panels Product Details. 8
Hard Surface Non-Raceway Panels 13
Tackable Acoustical Surface Non-Raceway Panels 14
Non-Powered Hard Surface Panels. 15
Powered Hard Surface Panels 16
Non-Powered Tackable Acoustical Surface Panels. 17
Powered Tackable Acoustical Surface Panels 18
Non-Powered Beltline Only Z-Panels. 19
Powered Beltline Only Z-Panels 20
Non-Powered Base / Non-Powered Beltline Dual Raceway Z-Panel. 21
Powered Base / Non-Powered Beltline Dual Raceway Z-Panels. 22
Non-Powered Base / Powered Beltline Dual Raceway Z-Panels. 23
Powered Base / Powered Beltline Dual Raceway Z-Panels 24
Non-Powered Quarter Glass Panels 25
Powered Quarter Glass Panels 26
Non-Powered Half Glass Panels 27
Powered Half Glass Panels 28
Non-Powered Air Flow / Wall Access Panels 29
Powered Air Flow / Wall Access Panels 30
Non-Powered Air Flow / Wall Access Panels 31
Linear Sliding Privacy Screens 32
Linear Sliding Privacy Screen Handles and Brackets. 33

CONNECTORS

Corner and Straight HiLo Kits. 34
Porkchop and Wall Mount Kits 35
Equal Height Post Fillers 36
Unequal Height Post Fillers 37
Unequal Height Post Fillers 38
Unequal Height Post Fillers 39
Unequal Height Post Fillers, End of Run Post Fillers and Wall Tracks 40
Base Raceway Shrouds, Topcap Raceway Shrouds 41

ELECTRICAL

MWall Electrical Product Details 42
Panel-to-Panel and Lateral Jumpers 46
Duplex Outlets 47
Side Mounted, Receptacle Mount and Ceiling In-Feeds 48
Pole Kits. 49
Dataport Boxes, Retrofit Kits, Junction Boxes and Data Plate Kits 50

SUPPORT

Cantilevers and Side Support/Rear Brackets 51
End Panels and Brackets 52
Panel Mounted A-Legs 53

STORAGE

Mid-Height Shelf Units 54
Mid-Height Corner Shelf Units 55
Type C Flipper Door Units. 56
Type C Raised Flipper Door Units 57
Type D Flipper and Raised Flipper Door Units 58
Sliding Door Units. 59
Raised Sliding Door Units. 60
Cabinet Door Units 61
Raised Cabinet Door Units 62

ACCSESSORIES

Tackboards, Tool Rail Kits and Panel Coat Hooks 63
Whiteboards. 64

WARRANTY & TERMS AND CONDITIONS

For Warranty & Terms and Conditions please visit:
https://aiscmsprod.blob.core.windows.net/infocenter/AISTermsWarranty.pdf

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

MWALL

PANELS

Hard Surface
Non-Raceway Panels



Tackable Acoustical
Surface Non-Raceway Panels



Hard Surface Panels
Powered or Non-Powered



Tackable Acoustical Surface Panels
Powered or Non-Powered



Beltline Only Z-Panels
Powered or Non-Powered



Dual Raceway Z-Panels
Powered or Non-Powered



Quarter Glass Panels
Powered or Non-Powered

Half Glass Panels
Powered or Non-Powered



Air Flow / Wall Access Panels
Powered or Non-Powered



ADA Door Panels
With or Without Glass, Left or Right Hand
Without Glass Right Hand Door Shown

66” High MWall Linear Sliding
Privacy Screen

80” High MWall Linear Sliding
Privacy Screen



Linear Sliding Door Handle

CONNECTORS

Universal Corner HiLo Kits



Universal Straight HiLo Kits



Standard Corner HiLo Kits



Standard Straight HiLo Kits



Porkchop Kits

Wall Mount Kits



2-Way Equal Height Post Filler



3-Way Equal Height Post Filler

4-Way Equal Height Post Filler

2-Way Unequal
Height Post Filler



3-Way Unequal
Height Post Filler

4-Way Unequal
Height Post Filler

© 2019, AIS, Inc.

Connectors, Electrical and Support

CONNECTORS


End of Run Post Filler

Wall Track


2-Way Base Raceway Shroud


3-Way Base Raceway Shroud


2-Way Topcap Raceway Shroud


3-Way Topcap Raceway Shroud

ELECTRICAL


Panel-to-Panel Jumpers


Lateral Pass Through Jumpers


Duplex Outlets


USB Outlets


Duplex Outlet Hole Covers


Side Mounted Base In-Feed


Receptacle Mount Base In-Feed


Ceiling In-Feeds


In-Line Power / Data Pole Kits


Double Channel Power / Data Pole Kit


In-Line Pole Extension Kits


Dataport Boxes w/ Vertical Wire Manager


Electrical Retrofit Kits


Hardwire Junction Box


Data Plate Kits

SUPPORT


Standard Cantilevers


Shared Cantilevers


Side / Support Rear Brackets


Panel Mounted Shelf Cantilevers


Standard End Panels


Clear Access End Panels

Pedestal-to-Pedestal Attachment Brackets


Countertop Brackets


Panel Mounted A-Legs
Left Hand, Right Hand or Freestanding
Freestanding Legs Shown

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Storage and Accessories

STORAGE



Mid-Height Shelf Units



Linear Mid-Height Shelf Units



Mid-Height Corner Shelf Unit



Linear Mid-Height
Corner Shelf Unit



Type C Flipper Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown



Type C Raised Flipper Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown



Type D Flipper Door Unit



Type D Raised
Flipper Door Unit



Sliding Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown



Raised Sliding Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown



Cabinet Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown



Raised Cabinet Door Unit
Metal/Fabric or Laminate Front
Metal/Fabric Door Front Shown

ACCESSORIES



Tackboards



Tool Rail Kits



Tool Rail Kits



White Board w/ Marker Tray
Framed or Frameless
Framed White Board Shown

© 2019, AIS, Inc.

Fabric Options

PANEL FABRICS BY AIS

Name	Style Number	Grade
Avenue Dusk	2062	A
Avenue Park Place	2064	A
Cape Cod Chatham	2711	A
Cape Cod Falmouth	2712	A
Cape Cod Harwich	2713	A
Cape Cod Hyannis	2714	A
Cape Cod Martha's Vineyard	2715	A
Cape Cod Nantucket	2716	A
Cape Cod Provincetown	2717	A
Engage Denim	2066	A
Engage Neutral	2065	A
Engage Rain Cloud	2067	A
Engage Toffee	2068	A
New England Boston	2700	A
New England Cambridge	2701	A
New England Concord	2702	A
New England Dixville Notch	2703	A
New England Hartford	2704	A
New England Lexington	2705	A
New England Newton	2706	A
New England Providence	2707	A
New England Rockport	2708	A
New England Salem	2709	A
New England York	2710	A
Rainfall Bliss	2059	A
Rainfall Shore	2060	A
Rainfall Sundown	2057	A
Rainfall Twilight	2058	A
Simplicity Blue Smooth	2001	A
Simplicity Chamoise	2002	A
Simplicity Grey Blue	2004	A
Simplicity Sandy Pebble	2005	A
Simplicity Stone	2530	A
Simplicity Twizzle Tan	2008	A
Stream Light Sand	2501	A

PANEL FABRICS BY GUILFORD OF MAINE

Name	Style Number	Grade
Anchorage	2335	B
Bailey	2299	B
Drift	2539	B
Lido	2858	B
Mingle	2527	B
Spinel	3582	B
Sprite	2671	B
Streetwise	2721	B
Reeds	3078	B
Tweed	2737	B
Bix	3008	C
Broadcast	2758	C
Coastline	3495	C
Crosstown	2526	C
Fr701	2100	C
Auster	2537	D
Block Party	2538	D
Groove	3497	D
Lily Pad	2318	D
Network	4158	D
Nitro	2317	D
Phone Tag	2314	D
Regatta	2400	D
Tempest	2120	D
Cosmos	2655	E

C.O.M. Fabric Policy

- It is mandatory that you work directly with your AIS Customer Service Representative for all COM related testing and orders. They will provide all necessary forms to you, as well as work with you with regard to sending in correct yardage and where to send it, along with necessary RA# or #s. Please note an RA must be submitted along with the fabric for testing, as well as an RA created for an actual order.
- **Please Note:** A three to five yard sample is required for testing and approval for use on all monolithic panel systems. A one yard sample is required for testing and approval on Divi Insert Tiles, Matrix Tiles, flipper doors and tackboards. We may be able to test upholstery fabrics with a swatch, your Customer Service Representative will advise based on the fabric being tested; otherwise a 1 yard sample must be submitted for testing. Results take 48 - 72 hours.
- Customer Service must be advised as to the width of the fabric rolls being supplied (54"W or 60"W). Customer Service must also be advised if the fabric has a backer.
- Yardage required for the job must be calculated by an AIS Customer Service Rep.
- Once AIS has approved the COM fabric, a fabric sample needs to be marked by the dealer with "Front", "Top", and "Bottom", to be sure fabric is applied correctly. The fabric sample then needs to be attached to a COM Fabric Dealer Form and forwarded to AIS Customer Service. The COM Fabric Dealer Form may be downloaded or printed here.
- Fabrics may be discontinued or obsolete without notice.
- Contact AIS Customer Service with any questions regarding fabric availability.
- All directional fabric will be railroaded.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Paint, Edgeband, Laminate and Tempered Glass Options

MWALL PAINT OPTIONS

Name	Color Code	Grade
Black	BK	A
Chalk	CK	A
Dark Tone	DT	A
Grey Value 1	GV1	A
Innertone	HT	A
Light Tone	LT	A
Medium Tone	MT	A
Satin White	SW	A
Warm Brown	WB	A
Champagne Metallic	CHM	B
Dark Grey Metallic	DGM	B
Flint Grey Metallic	FGM	B
Light Grey	LG	B
Metallic Silver	MS	B
Tan Value 1	TV1	B
Warm White	WW	B
Woodrose	WR	B
Antique Gold	AG	C
Blue	BL	C
Graphite Sky	GS	C
Lite Silver Smooth	LSS	C
Orange	OG	C
Red	RD	C
Violet	VT	C
Yellow	YW	C

EDGEBAND OPTIONS

Name	Color Code	Grade
Absolute Acajou	AA	A
Aimtoo Savatre	AS	A
Black	BK	A
Brazilwood	BZ	A
Cabinet Almond	CA	A
Chalk	CK	A
Corporate Walnut	CT	A
Dark Rum Cherry	DR	A
Dark Tone	DT	A
Grand Cherry	GC	A
Grey Value 1	GV1	A
Innertone	HT	A
Leave Likatre	LV	A
Light Tone	LT	A
Looks Likatre	LK	A
Medium Tone	MT	A
Midwest Maple	MM	A
Nightfall	NF	A
Recon Oak	RC	A
Satin White / True White	SW / TW	A
Storm	ST	A
Summer Drops	SD	A
Trytoo Savatre	TS	A
Warm Brown #1	WB1	A
Woodrose	WR	A

Custom Paints

- Minimum order size for any custom color is $75,000 list. Extended lead-time will apply.
- Any color not shown on Quick Ship, Standard Grade A, B or C will be considered custom.
- A $450 net paint match fee will be assessed following receipt of (2) 5”x5” samples of paint being matched.
- Minimum order size for any custom color is $75,000.00 list. Extended lead-time will apply.
- Additionally, Grade C paint up-charges will be applied to all applicable products on the order.
- **Important Custom Paint Note:** Most paint match pricing can be covered by the Grade C up-charge in the catalog, however the final pricing can only be determined after the paint is matched and a product list is provided to AIS customer service. An additional fee may apply based on job size and paint color.

Custom Edgeband Options

- A $450 net edge match fee will be assessed to custom match non-standard edgeband.
- Minimum order size for any custom color is $75,000.00 list. Extended lead-time will apply.

MWALL LAMINATE OPTIONS

Name	Grade
Absolute Acajou	B
Aimtoo Savatre	B
Black	B
Brazilwood	B
Cabinet Almond	B
Chalk	B
Corporate Walnut	B
Dark Rum Cherry	B
Grand Cherry	B
Leave Likatre	B
Linen	B
Looks Likatre	B
Midwest Maple	B
Nightfall	B
Paris White Potterware	B
Recon Oak	B
Storm	B
Summer Drops	B
Titanium EV	B
True White	B
Trytoo Savatre	B

TEMPERED GLASS OPTIONS

Name	Panels/Frame/Tiles/ Screens	1/4” Thick Frameless Glass	3/8” Thick Frameless Glass
Clear	Y	Y	Y
Frosted	Y	Y	Y
Aqui	N	N	Y
Bronze Tint	Y	Y	N
Grey Tint	Y	Y	N

All glass is tempered. The etched side of Frosted is always on Side A of the Frame or Panel. Side B of this glass options are smooth. Please see specific price list pages on each type of glass for list pricing and up-charges.

© 2019, AIS, Inc.

MWall Panels Product Details

Product Detail 1
Panel Statement of Line

Fabric Covered, Hard Surface, Non-Raceway

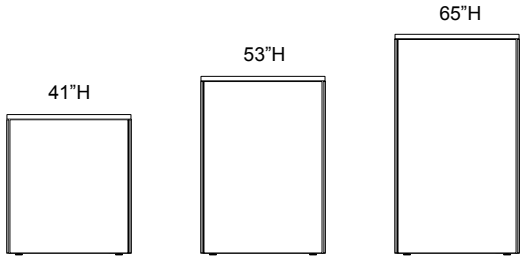

Heights:
Nominal Heights: 41”, 53”, 65”
Actual Minimum Heights: 41 1/4”, 52 3/8”, 64 11/16” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 18”, 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 18 5/16”, 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

Fabric Covered, Tackable Acoustical Surface, Non-Raceway



Heights:
Nominal Heights: 41”, 53”
Actual Minimum Heights: 52 3/8”, 64 11/16” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 18”, 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 18 5/16”, 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

Fabric Covered, Hard Surface, Powered/Non-Powered

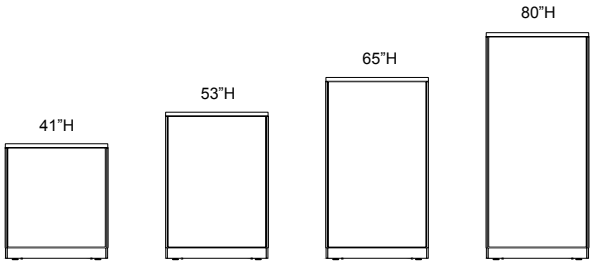

Heights:
Nominal Heights: 41”, 53”, 65”, 80”
Actual Minimum Heights: 41 1/4”, 52 3/8”, 64 11/16”, 80 1/2” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 18”*, 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 18 5/16”, 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

*Available in Non-Powered only.

Fabric Covered, Tackable Acoustical Surface, Powered/Non-Powered

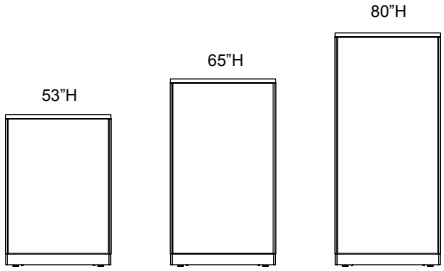

Heights:
Nominal Heights: 53”, 65”, 80”
Actual Minimum Heights: 52 3/8”, 64 11/16”, 80 1/2” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 18”*, 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 18 5/16”, 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

*Available in Non-Powered only.

Z-Panel, Beltline Raceway Only, Powered/Non-Powered

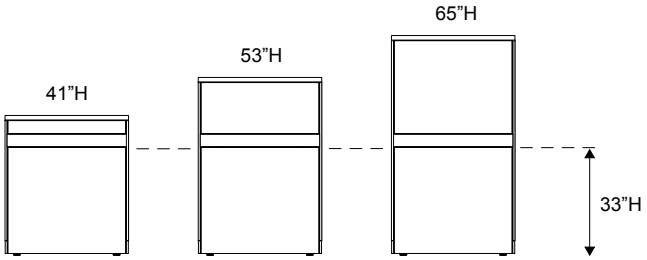

Heights:
Nominal Heights: 41”, 53”, 65”
Actual Minimum Heights: 41 1/4”, 52 3/8”, 64 11/16” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

Z-Panel, Dual Raceway

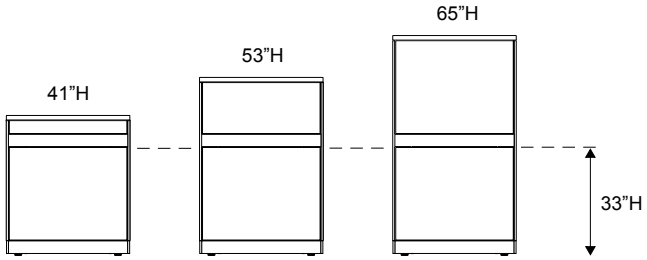

Heights:
Nominal Heights: 41”, 53”, 65”
Actual Minimum Heights: 41 1/4”, 52 3/8”, 64 11/16” - Leveling Glide Range is 1 1/2”

Widths:
Nominal Widths: 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 24 5/16”, 30 5/16”, 36 5/16”, 42 5/16”, 48 5/16”, 60 5/8”

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Product Detail 2
Panel Statement of Line

Quarter Glass, Fabric Covered, Hard Surface, Powered/Non-Powered

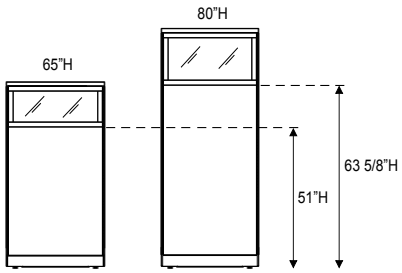

Heights:
Nominal Heights: 65”, 80”
Actual Minimum Heights: 64 $^{11}/_{16}$”, 80 $^{1}/_{2}$ - Leveling Glide Range is 1 $^{1}/_{2}$”

Widths:
Nominal Widths: 24”, 30”, 36”, 42”, 48”
Actual Widths: 24 $^{5}/_{16}$”, 30 $^{5}/_{16}$”, 36 $^{5}/_{16}$”, 42 $^{5}/_{16}$”, 48 $^{5}/_{16}$”

Half Glass, Fabric Covered, Hard Surface, Powered/Non-Powered

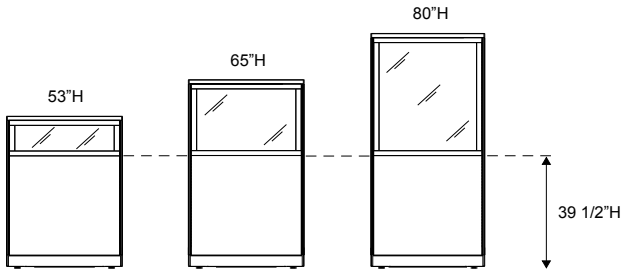

Heights:
Nominal Heights: 53”, 65”, 80”
Actual Minimum Heights: 52 $^{3}/_{8}$”, 64 $^{11}/_{16}$”, 80 $^{1}/_{2}$ - Leveling Glide Range is 1 $^{1}/_{2}$”

Widths:
Nominal Widths: 24”, 30”, 36”, 42”, 48”, 60”
Actual Widths: 24 $^{5}/_{16}$”, 30 $^{5}/_{16}$”, 36 $^{5}/_{16}$”, 42 $^{5}/_{16}$”, 48 $^{5}/_{16}$”

ADA Door Panel



Heights:
Nominal Heights: 80”
Actual Minimum Heights: 80 $^{1}/_{2}$” - Leveling Glide Range is 1 $^{1}/_{2}$”

Widths:
Nominal Widths: 42”
Actual Widths: 42 $^{5}/_{16}$”

© 2019, AIS, Inc.

MWall Panels Product Details

Product Detail 3
Panel Details and Specifications

MWall panels may be ordered with numerous raceway configurations, including non-raceway (not shown). Beltline and base raceways can be configured for electrical receptacles, electrical pass through, data and telecommunications interface, as well as data and telecommunications pass through. Topcap raceway is utilized for data and telecommunications only.

MWall Raceway Minimum Cross-Section Dimensions:



Topcap Raceway 1 1/8" x 1 1/4" data only. Data cable capacity 20 cables .2" diameter.



Beltline Raceway 1" x 3.5" for data and electrical. Data cable capacity 56 cables .2" diameter.



Base Raceway 1 3/8" x 3 5/8" for data and electrical. Data cable capacity 56 cables .2" diameter.



MWall Base Raceway - Powered shown on left, non-powered shown on right.



Z-Panel Beltline Only Raceway - Powered shown on left, non-powered shown on right.

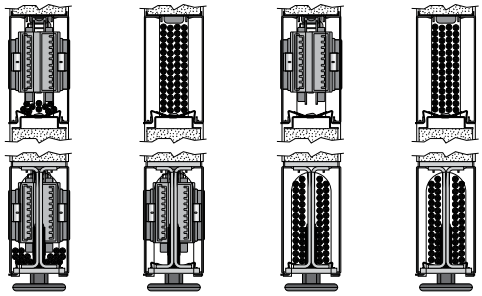

Z-Panel Dual Raceway - Powered Base and Beltline (left), Powered Base (center left), Powered Beltline (center right), Non-Powered Base and Beltline (right)

© 2019, AIS, Inc.

Product Detail 4
Rules for Panel Stability without Components

The guidelines outlined below should be followed when designing AIS MWall panels without components to ensure panel stability and safety. Change in height will not effect panel stability. **Note:** Any panel not directly attached to a perpendicular panel or fixed wall will yield when pressure is applied.

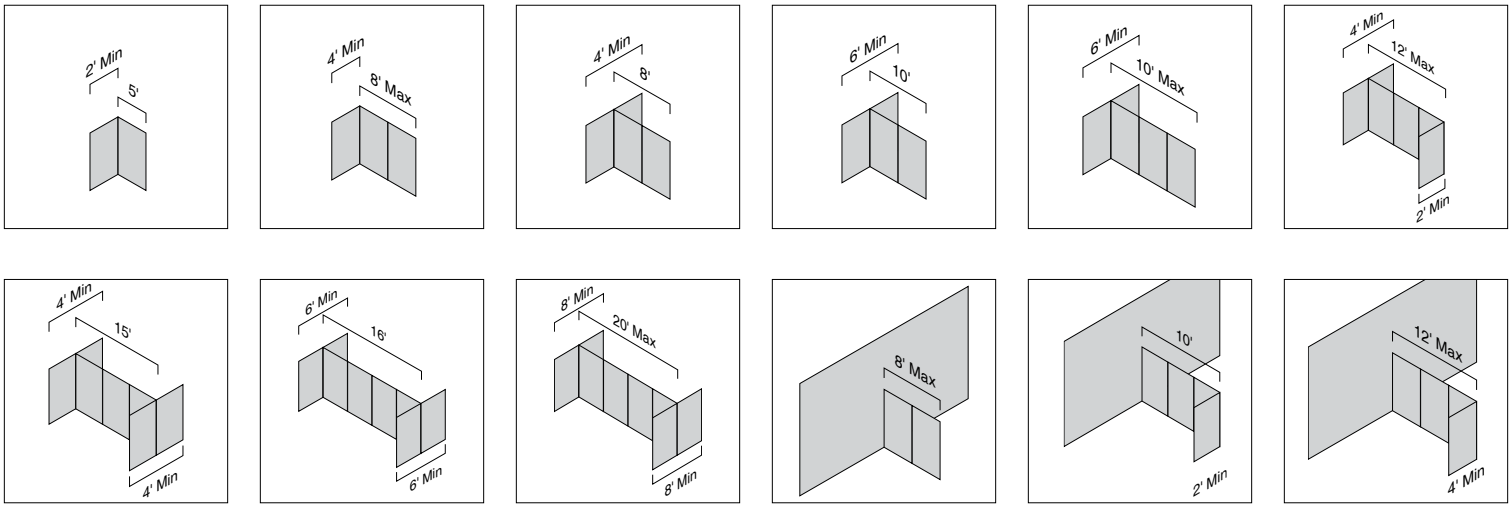

Product Detail 5
Rules for Panel Stability with Components

The guidelines outlined below should be followed when designing AIS MWall panels with components to ensure panel stability and safety. Change in height will not effect panel stability. **Note:** Any panel not directly attached to a perpendicular panel or fixed wall will yield when pressure is applied.

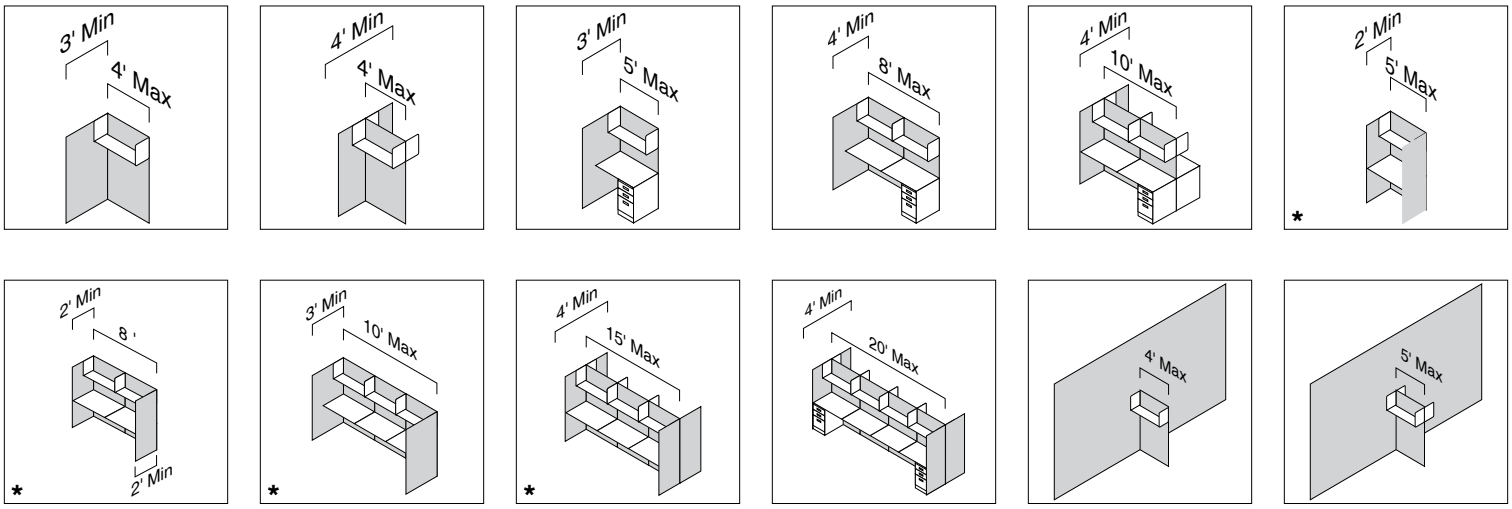

* 30” worksurfaces must be supported at the front with side support brackets or floor support elements/pedestals.

© 2019, AIS, Inc.

MWall Panels Product Details

Product Detail 6
Panel Creep Dimensions

Small increments are added to or taken away from the length of a run of panels as a result of the many ways panels are connected to each other. The accumulation of these increments is called panel creep. AIS MWall panels sizes 24”w - 48”w (nominal) are actually 5/16” oversized and 60”w panels (nominal) are actually 5/8” oversized to maintain nominal interior workstation dimensions (see below).

Straight Connections:
Add $^{1}/_{32}$” to panel run for each straight connection. 24”W (nominal) panels are shown.

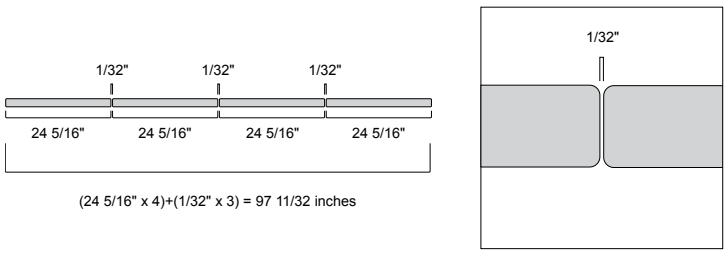

2-Way Connections:
Add 1 $^{27}/_{32}$ each time a perpendicular panel is added to the end of a panel run.

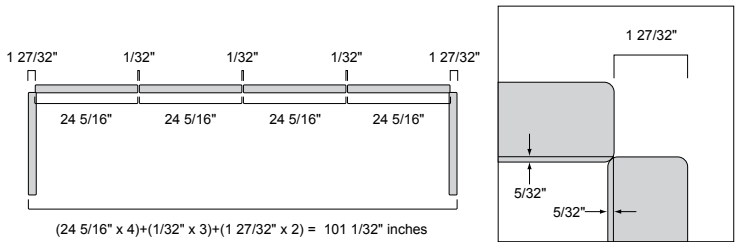

3-Way and 4-Way Connections:
Add $^{1}/_{32}$” each time a perpendicular panel is inserted into a panel run.

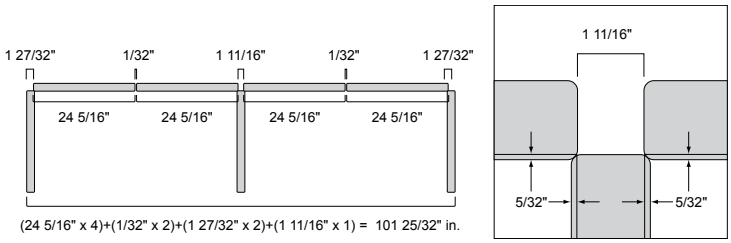

60” Wide Panels:
60”W (nominal) panels are oversized by $^{5}/_{8}$” to compensate for situations where smaller panels might be used in place of one larger.

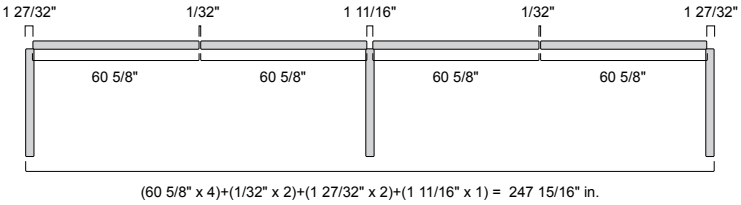

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Hard Surface Non-Raceway Panels

HARD SURFACE NON-RACEWAY PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	18	P-SAFS4118	502	+15	-46	+70	+140
41	24	P-SAFS4124	502	+15	-46	+70	+140
41	30	P-SAFS4130	512	+15	-46	+70	+140
41	36	P-SAFS4136	553	+15	-46	+70	+140
41	42	P-SAFS4142	598	+15	-46	+70	+140
41	48	P-SAFS4148	635	+15	-46	+70	+140
41	60	P-SAFS4160	787	+15	-46	+70	+140
53	18	P-SAFS5318	514	+15	-46	+86	+166
53	24	P-SAFS5324	514	+15	-46	+86	+166
53	30	P-SAFS5330	564	+15	-46	+86	+166
53	36	P-SAFS5336	628	+15	-46	+86	+166
53	42	P-SAFS5342	693	+15	-46	+86	+166
53	48	P-SAFS5348	757	+15	-46	+86	+166
53	60	P-SAFS5360	938	+15	-46	+86	+166
65	18	P-SAFS6518	612	+15	-46	+100	+190
65	24	P-SAFS6524	612	+15	-46	+100	+190
65	30	P-SAFS6530	695	+15	-46	+100	+190
65	36	P-SAFS6536	750	+15	-46	+100	+190
65	42	P-SAFS6542	821	+15	-46	+100	+190
65	48	P-SAFS6548	897	+15	-46	+100	+190
65	60	P-SAFS6560	1,070	+15	-46	+100	+190



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

Notes

Non-Raceway Panels - Hard Surface are fabric covered hard surface panels without a raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo Brackets. See “Connections”. **Non-raceway panels are the same height and therefore can be intermixed with non-powered and powered panels; however, electrical and data flow through adjoining raceway panels will be interrupted.**

© 2019, AIS, Inc.

Tackable Acoustical Surface Non-Raceway Panels

TACKABLE ACOUSTICAL SURFACE NON-RACEWAY PANELS							
H	**W**	**Model Number**	**List**	**Grade C Paint**	**C.O.M Fabric**	**Grade C Fabric**	**Grade D Fabric**
53	18	P-SAAS5318	680	+15	-56	+86	+166
53	24	P-SAAS5324	745	+15	-56	+86	+166
53	30	P-SAAS5330	773	+15	-56	+86	+166
53	36	P-SAAS5336	830	+15	-56	+86	+166
53	42	P-SAAS5342	887	+15	-56	+86	+166
53	48	P-SAAS5348	944	+15	-56	+86	+166
53	60	P-SAAS5360	1,148	+15	-56	+86	+166
65	18	P-SAAS6518	806	+15	-56	+100	+190
65	24	P-SAAS6524	772	+15	-56	+100	+190
65	30	P-SAAS6530	847	+15	-56	+100	+190
65	36	P-SAAS6536	892	+15	-56	+100	+190
65	42	P-SAAS6542	957	+15	-56	+100	+190
65	48	P-SAAS6548	1,045	+15	-56	+100	+190
65	60	P-SAAS6560	1,199	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

Notes

Non-Raceway Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels without a raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo Brackets. See “Connections”. **Non-raceway panels are the same height and therefore can be intermixed with non-powered and powered panels; however, electrical and data flow through adjoining raceway panels will be interrupted.**

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Hard Surface Panels

NON-POWERED HARD SURFACE PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	18	P-SAFR4118	571	+15	+15	-46	+70	+140
41	24	P-SAFR4124	583	+15	+15	-46	+70	+140
41	30	P-SAFR4130	632	+15	+15	-46	+70	+140
41	36	P-SAFR4136	672	+15	+15	-46	+70	+140
41	42	P-SAFR4142	715	+15	+15	-46	+70	+140
41	48	P-SAFR4148	758	+15	+15	-46	+70	+140
41	60	P-SAFR4160	905	+15	+15	-46	+70	+140
53	18	P-SAFR5318	596	+15	+15	-56	+86	+166
53	24	P-SAFR5324	628	+15	+15	-56	+86	+166
53	30	P-SAFR5330	695	+15	+15	-56	+86	+166
53	36	P-SAFR5336	765	+15	+15	-56	+86	+166
53	42	P-SAFR5342	834	+15	+15	-56	+86	+166
53	48	P-SAFR5348	904	+15	+15	-56	+86	+166
53	60	P-SAFR5360	1,076	+15	+15	-56	+86	+166
65	18	P-SAFR6518	628	+15	+15	-56	+100	+190
65	24	P-SAFR6524	723	+15	+15	-56	+100	+190
65	30	P-SAFR6530	797	+15	+15	-56	+100	+190
65	36	P-SAFR6536	867	+15	+15	-56	+100	+190
65	42	P-SAFR6542	939	+15	+15	-56	+100	+190
65	48	P-SAFR6548	1,013	+15	+15	-56	+100	+190
65	60	P-SAFR6560	1,214	+15	+15	-56	+100	+190
80	18	P-SAFR8018	695	+15	+15	-94	+120	+226
80	24	P-SAFR8024	821	+15	+15	-94	+120	+226
80	30	P-SAFR8030	904	+15	+15	-94	+120	+226
80	36	P-SAFR8036	992	+15	+15	-94	+120	+226
80	42	P-SAFR8042	1,072	+15	+15	-94	+120	+226
80	48	P-SAFR8048	1,174	+15	+15	-94	+120	+226

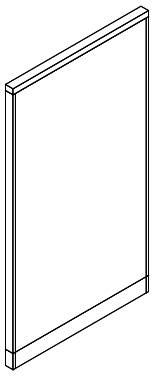

Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Non-Powered Panels - Hard Surface are fabric covered hard surface panels with a raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo Brackets. See “Connections”.

© 2019, AIS, Inc.

Powered Hard Surface Panels

POWERED HARD SURFACE PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFP4124	847	+15	-46	+70	+140
41	30	P-SAFP4130	894	+15	-46	+70	+140
41	36	P-SAFP4136	933	+15	-46	+70	+140
41	42	P-SAFP4142	971	+15	-46	+70	+140
41	48	P-SAFP4148	1,017	+15	-46	+70	+140
41	60	P-SAFP4160	1,160	+15	-46	+70	+140
53	24	P-SAFP5324	887	+15	-56	+86	+166
53	30	P-SAFP5330	954	+15	-56	+86	+166
53	36	P-SAFP5336	1,021	+15	-56	+86	+166
53	42	P-SAFP5342	1,091	+15	-56	+86	+166
53	48	P-SAFP5348	1,160	+15	-56	+86	+166
53	60	P-SAFP5360	1,328	+15	-56	+86	+166
65	24	P-SAFP6524	980	+15	-56	+100	+190
65	30	P-SAFP6530	1,052	+15	-56	+100	+190
65	36	P-SAFP6536	1,131	+15	-56	+100	+190
65	42	P-SAFP6542	1,194	+15	-56	+100	+190
65	48	P-SAFP6548	1,263	+15	-56	+100	+190
65	60	P-SAFP6560	1,458	+15	-56	+100	+190
80	24	P-SAFP8024	1,076	+15	-94	+120	+226
80	30	P-SAFP8030	1,160	+15	-94	+120	+226
80	36	P-SAFP8036	1,244	+15	-94	+120	+226
80	42	P-SAFP8042	1,321	+15	-94	+120	+226
80	48	P-SAFP8048	1,405	+15	-94	+120	+226



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

Notes

Powered Panels - Hard Surface are fabric covered hard surface panels with a powered raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo Brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Tackable Acoustical Surface Panels

NON-POWERED TACKABLE ACOUSTICAL SURFACE PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
53	18	P-SAAR5318	672	+15	+15	-56	+86	+166
53	24	P-SAAR5324	768	+15	+15	-56	+86	+166
53	30	P-SAAR5330	814	+15	+15	-56	+86	+166
53	36	P-SAAR5336	877	+15	+15	-56	+86	+166
53	42	P-SAAR5342	938	+15	+15	-56	+86	+166
53	48	P-SAAR5348	998	+15	+15	-56	+86	+166
53	60	P-SAAR5360	1,192	+15	+15	-56	+86	+166
65	18	P-SAAR6518	806	+15	+15	-56	+100	+190
65	24	P-SAAR6524	865	+15	+15	-56	+100	+190
65	30	P-SAAR6530	928	+15	+15	-56	+100	+190
65	36	P-SAAR6536	992	+15	+15	-56	+100	+190
65	42	P-SAAR6542	1,056	+15	+15	-56	+100	+190
65	48	P-SAAR6548	1,121	+15	+15	-56	+100	+190
65	60	P-SAAR6560	1,316	+15	+15	-56	+100	+190
80	18	P-SAAR8018	897	+15	+15	-94	+120	+226
80	24	P-SAAR8024	964	+15	+15	-94	+120	+226
80	30	P-SAAR8030	1,045	+15	+15	-94	+120	+226
80	36	P-SAAR8036	1,148	+15	+15	-94	+120	+226
80	42	P-SAAR8042	1,239	+15	+15	-94	+120	+226
80	48	P-SAAR8048	1,314	+15	+15	-94	+120	+226



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Non-Powered Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels with a raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”.

© 2019, AIS, Inc.

Powered Tackable Acoustical Surface Panels

POWERED TACKABLE ACOUSTICAL SURFACE PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
53	24	P-SAAP5324	1,058	+15	-56	+86	+166
53	30	P-SAAP5330	1,104	+15	-56	+86	+166
53	36	P-SAAP5336	1,166	+15	-56	+86	+166
53	42	P-SAAP5342	1,228	+15	-56	+86	+166
53	48	P-SAAP5348	1,286	+15	-56	+86	+166
53	60	P-SAAP5360	1,480	+15	-56	+86	+166
65	24	P-SAAP6524	1,140	+15	-56	+100	+190
65	30	P-SAAP6530	1,201	+15	-56	+100	+190
65	36	P-SAAP6536	1,263	+15	-56	+100	+190
65	42	P-SAAP6542	1,330	+15	-56	+100	+190
65	48	P-SAAP6548	1,395	+15	-56	+100	+190
65	60	P-SAAP6560	1,591	+15	-56	+100	+190
80	24	P-SAAP8024	1,235	+15	-94	+120	+226
80	30	P-SAAP8030	1,314	+15	-94	+120	+226
80	36	P-SAAP8036	1,417	+15	-94	+120	+226
80	42	P-SAAP8042	1,486	+15	-94	+120	+226
80	48	P-SAAP8048	1,558	+15	-94	+120	+226



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

Notes

Powered Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels with a powered raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel.

© 2019, AIS, Inc.

Non-Powered Beltline Only Z-Panels

NON-POWERED BELTLINE ONLY Z-PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZSR4124	759	+15	+15	-46	+70	+140
41	30	P-SAFZSR4130	773	+15	+15	-46	+70	+140
41	36	P-SAFZSR4136	971	+15	+15	-46	+70	+140
41	42	P-SAFZSR4142	996	+15	+15	-46	+70	+140
41	48	P-SAFZSR4148	1,021	+15	+15	-46	+70	+140
41	60	P-SAFZSR4160	1,073	+15	+15	-46	+70	+140
53	24	P-SAFZSR5324	848	+15	+15	-56	+86	+166
53	30	P-SAFZSR5330	869	+15	+15	-56	+86	+166
53	36	P-SAFZSR5336	1,104	+15	+15	-56	+86	+166
53	42	P-SAFZSR5342	1,135	+15	+15	-56	+86	+166
53	48	P-SAFZSR5348	1,164	+15	+15	-56	+86	+166
53	60	P-SAFZSR5360	1,231	+15	+15	-56	+86	+166
65	24	P-SAFZSR6524	892	+15	+15	-56	+100	+190
65	30	P-SAFZSR6530	912	+15	+15	-56	+100	+190
65	36	P-SAFZSR6536	1,187	+15	+15	-56	+100	+190
65	42	P-SAFZSR6542	1,215	+15	+15	-56	+100	+190
65	48	P-SAFZSR6548	1,246	+15	+15	-56	+100	+190
65	60	P-SAFZSR6560	1,342	+15	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Z-Panel, Beltline Only - Non-Powered are fabric covered hard surface panels with a (non-powered) beltline raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”.

© 2019, AIS, Inc.

Powered Beltline Only Z-Panels

POWERED BELTLINE ONLY Z-PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZSP4124	1,039	+15	-46	+70	+140
41	30	P-SAFZSP4130	1,059	+15	-46	+70	+140
41	36	P-SAFZSP4136	1,292	+15	-46	+70	+140
41	42	P-SAFZSP4142	1,292	+15	-46	+70	+140
41	48	P-SAFZSP4148	1,364	+15	-46	+70	+140
41	60	P-SAFZSP4160	1,443	+15	-46	+70	+140
53	24	P-SAFZSP5324	1,125	+15	-56	+86	+166
53	30	P-SAFZSP5330	1,155	+15	-56	+86	+166
53	36	P-SAFZSP5336	1,388	+15	-56	+86	+166
53	42	P-SAFZSP5342	1,426	+15	-56	+86	+166
53	48	P-SAFZSP5348	1,506	+15	-56	+86	+166
53	60	P-SAFZSP5360	1,563	+15	-56	+86	+166
65	24	P-SAFZSP6524	1,167	+15	-56	+100	+190
65	30	P-SAFZSP6530	1,195	+15	-56	+100	+190
65	36	P-SAFZSP6536	1,502	+15	-56	+100	+190
65	42	P-SAFZSP6542	1,505	+15	-56	+100	+190
65	48	P-SAFZSP6548	1,585	+15	-56	+100	+190
65	60	P-SAFZSP6560	1,641	+15	-56	+100	+190

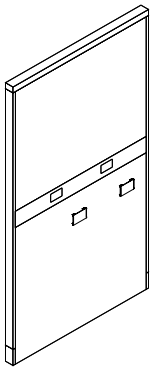

Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim

Notes

Z-Panel, Beltline Only - Powered are fabric covered hard surface panels with a (powered) beltline raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Base / Non-Powered Beltline Dual Raceway Z-Panel

NON-POWERED BASE / BELTLINE DUAL RACEWAY Z-PANEL

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZR4124	810	+15	+15	-46	+70	+140
41	30	P-SAFZR4130	837	+15	+15	-46	+70	+140
41	36	P-SAFZR4136	1,027	+15	+15	-46	+70	+140
41	42	P-SAFZR4142	1,206	+15	+15	-46	+70	+140
41	48	P-SAFZR4148	1,239	+15	+15	-46	+70	+140
41	60	P-SAFZR4160	1,311	+15	+15	-46	+70	+140
53	24	P-SAFZR5324	893	+15	+15	-56	+86	+166
53	30	P-SAFZR5330	928	+15	+15	-56	+86	+166
53	36	P-SAFZR5336	1,153	+15	+15	-56	+86	+166
53	42	P-SAFZR5342	1,340	+15	+15	-56	+86	+166
53	48	P-SAFZR5348	1,377	+15	+15	-56	+86	+166
53	60	P-SAFZR5360	1,466	+15	+15	-56	+86	+166
65	24	P-SAFZR6524	956	+15	+15	-56	+100	+190
65	30	P-SAFZR6530	969	+15	+15	-56	+100	+190
65	36	P-SAFZR6536	1,226	+15	+15	-56	+100	+190
65	42	P-SAFZR6542	1,419	+15	+15	-56	+100	+190
65	48	P-SAFZR6548	1,457	+15	+15	-56	+100	+190
65	60	P-SAFZR6560	1,543	+15	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Z-Panel, Dual Raceway - Non-Powered Base / Beltline are fabric covered hard surface panels with a (non-powered) beltline raceway unit and a (non-powered) base raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”.

© 2019, AIS, Inc.

Powered Base / Non-Powered Beltline Dual Raceway Z-Panels

POWERED BASE / NON-POWERED BELTLINE DUAL RACEWAY Z-PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZPB4124	1,079	+15	+15	-46	+70	+140
41	30	P-SAFZPB4130	1,115	+15	+15	-46	+70	+140
41	36	P-SAFZPB4136	1,415	+15	+15	-46	+70	+140
41	42	P-SAFZPB4142	1,493	+15	+15	-46	+70	+140
41	48	P-SAFZPB4148	1,539	+15	+15	-46	+70	+140
41	60	P-SAFZPB4160	1,632	+15	+15	-46	+70	+140
53	24	P-SAFZPB5324	1,161	+15	+15	-56	+86	+166
53	30	P-SAFZPB5330	1,202	+15	+15	-56	+86	+166
53	36	P-SAFZPB5336	1,431	+15	+15	-56	+86	+166
53	42	P-SAFZPB5342	1,625	+15	+15	-56	+86	+166
53	48	P-SAFZPB5348	1,675	+15	+15	-56	+86	+166
53	60	P-SAFZPB5360	1,785	+15	+15	-56	+86	+166
65	24	P-SAFZPB6524	1,229	+15	+15	-56	+100	+190
65	30	P-SAFZPB6530	1,273	+15	+15	-56	+100	+190
65	36	P-SAFZPB6536	1,504	+15	+15	-56	+100	+190
65	42	P-SAFZPB6542	1,741	+15	+15	-56	+100	+190
65	48	P-SAFZPB6548	1,795	+15	+15	-56	+100	+190
65	60	P-SAFZPB6560	1,859	+15	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Z-Panel, Dual Raceway - Powered Base / Non-Powered Beltline are fabric covered hard surface panels with a (non-powered) beltline raceway unit and a (powered) base raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel.

© 2019, AIS, Inc.

Non-Powered Base / Powered Beltline Dual Raceway Z-Panels

NON-POWERED BASE / POWERED BELTLINE DUAL RACEWAY Z-PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZPT4124	1,079	+15	+15	-46	+70	+140
41	30	P-SAFZPT4130	1,115	+15	+15	-46	+70	+140
41	36	P-SAFZPT4136	1,341	+15	+15	-46	+70	+140
41	42	P-SAFZPT4142	1,493	+15	+15	-46	+70	+140
41	48	P-SAFZPT4148	1,577	+15	+15	-46	+70	+140
41	60	P-SAFZPT4160	1,679	+15	+15	-46	+70	+140
53	24	P-SAFZPT5324	1,161	+15	+15	-56	+86	+166
53	30	P-SAFZPT5330	1,202	+15	+15	-56	+86	+166
53	36	P-SAFZPT5336	1,431	+15	+15	-56	+86	+166
53	42	P-SAFZPT5342	1,625	+15	+15	-56	+86	+166
53	48	P-SAFZPT5348	1,675	+15	+15	-56	+86	+166
53	60	P-SAFZPT5360	1,826	+15	+15	-56	+86	+166
65	24	P-SAFZPT6524	1,229	+15	+15	-56	+100	+190
65	30	P-SAFZPT6530	1,273	+15	+15	-56	+100	+190
65	36	P-SAFZPT6536	1,540	+15	+15	-56	+100	+190
65	42	P-SAFZPT6542	1,700	+15	+15	-56	+100	+190
65	48	P-SAFZPT6548	1,795	+15	+15	-56	+100	+190
65	60	P-SAFZPT6560	1,904	+15	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Z-Panel, Dual Raceway - Non-Powered Base / Powered Beltline are fabric covered hard surface panels with a (powered) beltline raceway unit and a (non-powered) base raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel.

© 2019, AIS, Inc.

Powered Base / Powered Beltline Dual Raceway Z-Panels

POWERED BASE / POWERED BELTLINE DUAL RACEWAY Z-PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFZP4124	1,323	+15	-46	+70	+140
41	30	P-SAFZP4130	1,364	+15	-46	+70	+140
41	36	P-SAFZP4136	1,559	+15	-46	+70	+140
41	42	P-SAFZP4142	1,746	+15	-46	+70	+140
41	48	P-SAFZP4148	1,802	+15	-46	+70	+140
41	60	P-SAFZP4160	1,922	+15	-46	+70	+140
53	24	P-SAFZP5324	1,402	+15	-56	+86	+166
53	30	P-SAFZP5330	1,451	+15	-56	+86	+166
53	36	P-SAFZP5336	1,677	+15	-56	+86	+166
53	42	P-SAFZP5342	1,873	+15	-56	+86	+166
53	48	P-SAFZP5348	1,935	+15	-56	+86	+166
53	60	P-SAFZP5360	2,063	+15	-56	+86	+166
65	24	P-SAFZP6524	1,440	+15	-56	+100	+190
65	30	P-SAFZP6530	1,487	+15	-56	+100	+190
65	36	P-SAFZP6536	1,747	+15	-56	+100	+190
65	42	P-SAFZP6542	1,946	+15	-56	+100	+190
65	48	P-SAFZP6548	2,008	+15	-56	+100	+190
65	60	P-SAFZP6560	2,139	+15	-56	+100	+190



Specify

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim

Notes

Z-Panel, Dual Raceway - Powered Base / Powered Beltline are fabric covered hard surface panels with a (powered) beltline raceway unit and a (powered) base raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Four duplex outlet hole covers are included with each powered panel.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Quarter Glass Panels

NON-POWERED QUARTER GLASS PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
65	24	P-SAQGRW6524	1,477	+15	+15	-46	+70	+140
65	30	P-SAQGRW6530	1,635	+15	+15	-46	+70	+140
65	36	P-SAQGRW6536	1,790	+15	+15	-46	+70	+140
65	42	P-SAQGRW6542	1,945	+15	+15	-46	+70	+140
65	48	P-SAQGRW6548	2,101	+15	+15	-46	+70	+140
80	24	P-SAQGRW8024	1,677	+15	+15	-46	+70	+140
80	30	P-SAQGRW8030	1,866	+15	+15	-46	+70	+140
80	36	P-SAQGRW8036	2,048	+15	+15	-46	+70	+140
80	42	P-SAQGRW8042	2,238	+15	+15	-46	+70	+140
80	48	P-SAQGRW8048	2,426	+15	+15	-46	+70	+140



Specify

- Fabric Selection for Side A
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert
- Data Knockout Option

Notes

Quarter Glass Panels - Non-Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes. The lower section of the panel is a fabric covered hard surface with a (non-powered) raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. 65”H panels fabric height is 51”H with glides fully extended, 80”H panels fabric height is 63 5/8”H with glides fully extended.

© 2019, AIS, Inc.

Powered Quarter Glass Panels

POWERED QUARTER GLASS PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
65	24	P-SAQGPW6524	1,711	+15	-46	+70	+140
65	30	P-SAQGPW6530	1,871	+15	-46	+70	+140
65	36	P-SAQGPW6536	2,030	+15	-46	+70	+140
65	42	P-SAQGPW6542	2,190	+15	-46	+70	+140
65	48	P-SAQGPW6548	2,348	+15	-46	+70	+140
80	24	P-SAQGPW8024	1,921	+15	-46	+70	+140
80	30	P-SAQGPW8030	2,109	+15	-46	+70	+140
80	36	P-SAQGPW8036	2,297	+15	-46	+70	+140
80	42	P-SAQGPW8042	2,490	+15	-46	+70	+140
80	48	P-SAQGPW8048	2,683	+15	-46	+70	+140



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert

Notes

Quarter Glass Panels - Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes. The lower section of the panel is a fabric covered hard surface with a (powered) raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel. 65”H panels fabric height is 51”H with glides fully extended, 80”H panels fabric height is 63 5/8”H with glides fully extended.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Half Glass Panels

NON-POWERED HALF GLASS PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
53	24	P-SAHGRW5324	1,278	+15	+15	-46	+70	+140
53	30	P-SAHGRW5330	1,405	+15	+15	-46	+70	+140
53	36	P-SAHGRW5336	1,530	+15	+15	-46	+70	+140
53	42	P-SAHGRW5342	1,655	+15	+15	-46	+70	+140
53	48	P-SAHGRW5348	1,778	+15	+15	-46	+70	+140
65	24	P-SAHGRW6524	1,477	+15	+15	-46	+70	+140
65	30	P-SAHGRW6530	1,635	+15	+15	-46	+70	+140
65	36	P-SAHGRW6536	1,790	+15	+15	-46	+70	+140
65	42	P-SAHGRW6542	1,945	+15	+15	-46	+70	+140
65	48	P-SAHGRW6548	2,101	+15	+15	-46	+70	+140
80	24	P-SAHGRW8024	1,677	+15	+15	-46	+70	+140
80	30	P-SAHGRW8030	1,866	+15	+15	-46	+70	+140
80	36	P-SAHGRW8036	2,048	+15	+15	-46	+70	+140
80	42	P-SAHGRW8042	2,238	+15	+15	-46	+70	+140
80	48	P-SAHGRW8048	2,426	+15	+15	-46	+70	+140



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert
- Data Knockout Option

Notes

Half Glass Panels - Non-Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes. The lower section of the panel is a fabric covered hard surface with a (non-powered) raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”.

© 2019, AIS, Inc.

Powered Half Glass Panels

POWERED HALF GLASS PANELS							
H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
53	24	P-SAHGPW5324	1,505	+15	-46	+70	+140
53	30	P-SAHGPW5330	1,634	+15	-46	+70	+140
53	36	P-SAHGPW5336	1,763	+15	-46	+70	+140
53	42	P-SAHGPW5342	1,891	+15	-46	+70	+140
53	48	P-SAHGPW5348	2,017	+15	-46	+70	+140
65	24	P-SAHGPW6524	1,711	+15	-46	+70	+140
65	30	P-SAHGPW6530	1,871	+15	-46	+70	+140
65	36	P-SAHGPW6536	2,030	+15	-46	+70	+140
65	42	P-SAHGPW6542	2,190	+15	-46	+70	+140
65	48	P-SAHGPW6548	2,348	+15	-46	+70	+140
80	24	P-SAHGPW8024	1,921	+15	-46	+70	+140
80	30	P-SAHGPW8030	2,109	+15	-46	+70	+140
80	36	P-SAHGPW8036	2,297	+15	-46	+70	+140
80	42	P-SAHGPW8042	2,490	+15	-46	+70	+140
80	48	P-SAHGPW8048	2,683	+15	-46	+70	+140



Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert

Notes

Half Glass Panels - Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes. The lower section of the panel is a fabric covered hard surface with a (powered) raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel. Fabric height is 39 1/2” from floor when glides are fully extended.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Air Flow / Wall Access Panels

NON-POWERED AIR FLOW / WALL ACCESS PANELS

H	W	Model Number	List	Grade C Paint	Data KO	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFOBR4124	902	+15	+15	-46	+70	+140
41	30	P-SAFOBR4130	975	+15	+15	-46	+70	+140
41	36	P-SAFOBR4136	1,042	+15	+15	-46	+70	+140
41	42	P-SAFOBR4142	1,106	+15	+15	-46	+70	+140
41	48	P-SAFOBR4148	1,174	+15	+15	-46	+70	+140
41	60	P-SAFOBR4160	1,403	+15	+15	-46	+70	+140
53	24	P-SAFOBR5324	971	+15	+15	-56	+86	+166
53	30	P-SAFOBR5330	1,076	+15	+15	-56	+86	+166
53	36	P-SAFOBR5336	1,187	+15	+15	-56	+86	+166
53	42	P-SAFOBR5342	1,291	+15	+15	-56	+86	+166
53	48	P-SAFOBR5348	1,401	+15	+15	-56	+86	+166
53	60	P-SAFOBR5360	1,669	+15	+15	-56	+86	+166
65	24	P-SAFOBR6524	1,121	+15	+15	-56	+100	+190
65	30	P-SAFOBR6530	1,234	+15	+15	-56	+100	+190
65	36	P-SAFOBR6536	1,342	+15	+15	-56	+100	+190
65	42	P-SAFOBR6542	1,456	+15	+15	-56	+100	+190
65	48	P-SAFOBR6548	1,569	+15	+15	-56	+100	+190
65	60	P-SAFOBR6560	1,878	+15	+15	-56	+100	+190
80	24	P-SAFOBR8024	1,274	+15	+15	-94	+120	+226
80	30	P-SAFOBR8030	1,401	+15	+15	-94	+120	+226
80	36	P-SAFOBR8036	1,535	+15	+15	-94	+120	+226
80	42	P-SAFOBR8042	1,663	+15	+15	-94	+120	+226
80	48	P-SAFOBR8048	1,823	+15	+15	-94	+120	+226

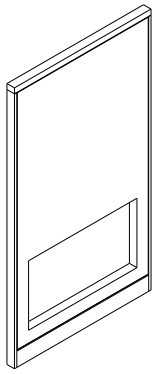

Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

Notes

Non-Powered Panels - Air Flow / Wall Access are fabric covered hard surface panels with a raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Air Flow / Wall Access Panels have a 3” fabric border around the opening that allows for air flow. The height of the opening is 16”.

© 2019, AIS, Inc.

Powered Air Flow / Wall Access Panels

POWERED AIR FLOW / WALL ACCESS PANELS

H	W	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric
41	24	P-SAFOBP4124	1,310	+15	-46	+70	+140
41	30	P-SAFOBP4130	1,383	+15	-46	+70	+140
41	36	P-SAFOBP4136	1,444	+15	-46	+70	+140
41	42	P-SAFOBP4142	1,507	+15	-46	+70	+140
41	48	P-SAFOBP4148	1,575	+15	-46	+70	+140
41	60	P-SAFOBP4160	1,794	+15	-46	+70	+140
53	24	P-SAFOBP5324	1,374	+15	-56	+86	+166
53	30	P-SAFOBP5330	1,477	+15	-56	+86	+166
53	36	P-SAFOBP5336	1,580	+15	-56	+86	+166
53	42	P-SAFOBP5342	1,690	+15	-56	+86	+166
53	48	P-SAFOBP5348	1,794	+15	-56	+86	+166
53	60	P-SAFOBP5360	2,058	+15	-56	+86	+166
65	24	P-SAFOBP6524	1,517	+15	-56	+100	+190
65	30	P-SAFOBP6530	1,628	+15	-56	+100	+190
65	36	P-SAFOBP6536	1,753	+15	-56	+100	+190
65	42	P-SAFOBP6542	1,848	+15	-56	+100	+190
65	48	P-SAFOBP6548	1,958	+15	-56	+100	+190
65	60	P-SAFOBP6560	2,260	+15	-56	+100	+190
80	24	P-SAFOBP8024	1,669	+15	-94	+120	+226
80	30	P-SAFOBP8030	1,794	+15	-94	+120	+226
80	36	P-SAFOBP8036	1,927	+15	-94	+120	+226
80	42	P-SAFOBP8042	2,047	+15	-94	+120	+226
80	48	P-SAFOBP8048	2,176	+15	-94	+120	+226

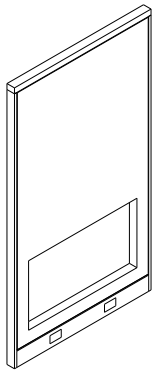

Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

Notes

Powered Panels - Air Flow / Wall Access are fabric covered hard surface panels with a powered raceway unit. Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height. For connecting to panels of unequal height, order HiLo brackets. See “Connections”. Duplex outlets and electrical jumpers are ordered separately. See “Electrical”. Two duplex outlet hole covers are included with each powered panel. Air Flow / Wall Access Panels have a 3” fabric border around the opening that allows for air flow. The height of the opening is 16”.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Non-Powered Air Flow / Wall Access Panels

ADA DOOR PANELS

H	W	Type	Model Number	List	Grade C Panel Trim	Grade C Door Paint
80	42	Left	P-SADL8042	3,564	+15	+100
80	42	Right	P-SADR8042	3,564	+15	+100



Left Hand



Right Hand

Specify	Notes
• Paint Selection for Door and Door Frame	ADA Door Panels use a steel tube frame with hollow core door, stainless steel threshold, locking ADA door handle and full height transparent window. Includes one panel, one locking ADA lockset, and two keys. Lockset is field installed. Metallic colors are not available on actual door, only metal frame available in metallic colors.

ADA GLASS WINDOW DOOR PANELS

H	W	Type	Model Number	List	Grade C Panel Trim	Grade C Door Paint
80	42	Left	P-SADLG8042	5,466	+15	+100
80	42	Right	P-SADRG8042	5,466	+15	+100



Left Hand



Right Hand

Specify	Notes
• Paint Selection for Door and Door Frame • Insert Style for Tempered Glass	ADA Glass Window Door Panels use a steel tube frame with hollow core door, stainless steel threshold, locking ADA door handle and full height transparent window. Includes one panel, one locking ADA lockset, and two keys. Lockset is field installed. Door has a 5” wood painted border around the glass. Metallic colors are not available on actual door, only metal frame available in metallic colors.

© 2019, AIS, Inc.

Linear Sliding Privacy Screens

MWALL LINEAR SLIDING SCREENS

Panel H	Doorway W	Adjacent Panel W	Left Hand Model Number	Right Hand Model Number	List	Grade C Paint
65	36	36	P-MWLRS6536L	P-MWLRS6536R	2,684	+25
65	36	42	P-MWLRS653642L	P-MWLRS653642R	2,745	+25
65	36	48	P-MWLRS653648L	P-MWLRS653648R	2,806	+25
65	42	42	P-MWLRS6542L	P-MWLRS6542R	2,688	+25
65	42	48	P-MWLRS654248L	P-MWLRS654248R	2,749	+25
65	48	48	P-MWLRS6548L	P-MWLRS6548R	2,849	+25
80	36	36	P-MWLRS8036L	P-MWLRS8036R	2,793	+25
80	36	42	P-MWLRS803642L	P-MWLRS803642R	2,854	+25
80	36	48	P-MWLRS803648L	P-MWLRS803648R	2,915	+25
80	42	42	P-MWLRS8042L	P-MWLRS8042R	2,802	+25
80	42	48	P-MWLRS804248L	P-MWLRS804248R	2,863	+25
80	48	48	P-MWLRS8048L	P-MWLRS8048R	2,887	+25

MWALL LINEAR LOCKING SLIDING SCREENS

Panel H	Doorway W	Adjacent Panel W	Left Hand Model Number	Right Hand Model Number	List	Grade C Paint
65	36	36	P-MWLRS6536LL	P-MWLRS6536RL	2,859	+25
65	36	42	P-MWLRS653642LL	P-MWLRS653642RL	2,920	+25
65	36	48	P-MWLRS653648LL	P-MWLRS653648RL	2,981	+25
65	42	42	P-MWLRS6542LL	P-MWLRS6542RL	2,865	+25
65	42	48	P-MWLRS654248LL	P-MWLRS654248RL	2,926	+25
65	48	48	P-MWLRS6548LL	P-MWLRS6548RL	3,025	+25
80	36	36	P-MWLRS8036LL	P-MWLRS8036RL	2,969	+25
80	36	42	P-MWLRS803642LL	P-MWLRS803642RL	3,030	+25
80	36	48	P-MWLRS803648LL	P-MWLRS803648RL	3,091	+25
80	42	42	P-MWLRS8042LL	P-MWLRS8042RL	2,978	+25
80	42	48	P-MWLRS804248LL	P-MWLRS804248RL	3,039	+25
80	48	48	P-MWLRS8048LL	P-MWLRS8048RL	3,063	+25



Right Hand with Optional Handle Shown



Right Hand with Optional Handle Shown



Right Hand with Lock and Handle Shown



Right Hand with Lock and Handle Shown

Specify

- Paint Selection for Sliding Door Frame

Notes

The Linear Sliding Privacy Screen attaches to frame face at either left or right, outside or inside of an opening. Select a Sliding Privacy Screen based upon the dimensions of the opening it will cover and the adjacent panel that it will be installed to. Linear Sliding Privacy Screens are available to accommodate 36”, 42” or 48” wide by 65” or 80” high openings and adjacent panels. All doors come with a top track bar kit for added stability; only 80” high units extend over the doorway. Lightweight, aluminum frame, painted as specified, with a ribbed Lexan insert. The sliding door extends 6” into opening when fully open, and stands a total of 2-1/2” off panel face. These dimensions should be taken into consideration when planning for ADA door openings and aisle dimensional requirements if door is mounted on outside of office. Actual door thickness is 5/8”. Actual door width is opening size +6”. Only mount externally. Doors can only be locked from the outside, when user is out of office. Optional handles and wall termination brackets are available separately.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Linear Sliding Privacy Screen Handles and Brackets

LINEAR SLIDING PRIVACY SCREEN HANDLE KIT

Model Number	List
P-UNSLDHK	61



Specify	Notes

LINEAR SLIDING PRIVACY SCREEN WALL BRACKET KIT

Model Number	List	Grade C Paint
A-RPSLWATB	57	+25



Specify	Notes
	Use this bracket where the top guide rail of the Linear Sliding Privacy Screen extends over the doorway and terminates against a wall instead of a panel. Fasteners for top rail included, fasteners for wall are not included.

© 2019, AIS, Inc.

Corner and Straight HiLo Kits

UNIVERSAL CORNER HILO KITS

Model Number	List	Grade C Paint
P-SAHILORAC	73	+5

Specify	Notes
• Paint Selection	Universal Corner HiLo Kits are designed to be used as a corner HiLo solution that attaches below the height of the top of the low panel to allow an overhead to mount on the top panel. Order one kit per “inside” 90 degree connection. Universal Corner HiLo Kit allows Flipper Door Unit to hang on 65” high panel adjacent to 53” Corner HiLo connection.

UNIVERSAL STRAIGHT HILO KITS

Model Number	List	Grade C Paint
P-SAHILOS	73	+5



Specify	Notes
• Paint Selection	Universal Straight HiLo Kits are designed to be used as a straight HiLo solution that allows the use of an overhead on the high panel and is completely hidden from view once installed. Universal Corner HiLo Kit allows Flipper Door Unit to hang on 65” high panel adjacent to 53” Corner HiLo connection

STANDARD CORNER HILO KITS

Low Panel	Model Number	List	Grade C Paint
41	P-SAHILOC41	73	+5
53	P-SAHILOC53	73	+5
65	P-SAHILOC65	73	+5



Specify	Notes
• Paint Selection	Standard Corner HiLo Kits contain all the hardware needed to connect panels of unequal height at a 90° angle. These packages must be ordered separately. There are three versions of these brackets. Specify the version that corresponds with the height of the low panel. These brackets are “handed” and are sold in pairs. Each package contains one right hand bracket, one left hand bracket and two panel screws.

STANDARD STRAIGHT HILO KITS

Low Panel	Model Number	List	Grade C Paint
41	P-SAHILOS41	73	+5
53	P-SAHILOS53	73	+5
65	P-SAHILOS65	73	+5



Specify	Notes
• Paint Selection	Standard Straight HiLo Kits contain all the hardware needed to connect panels of unequal height at a straight connection. These packages must be ordered separately. There are three versions of these brackets. Specify the version that corresponds with the height of the low panel. These brackets are “handed” and are sold in pairs. Each package contains one right hand bracket, one left hand bracket and two panel screws.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Porkchop and Wall Mount Kits

PORKCHOP KITS

Model Number	List
P-SAPCHP	42



Notes

Porkchop Kits contain all the hardware needed to connect panels of equal height. One package is included with every MWall panel. Order as a separate item only if extra hardware is desired. For connecting panels of unequal height, see “HiLo brackets”.

WALL MOUNT KIT

Model Number	List
P-SAWM	52

Notes

Wall Mount Kits, are used to attach panels of all heights perpendicular to fixed walls. These packages must be ordered separately from panels. Order one package per panel wall mount situation. Packages include two wall mount “L” brackets, one panel screw and one pin. Packages include all hardware required to mount the brackets to the panel. Hardware to mount the brackets to the wall is not included. Use hardware appropriate to wall type. Wall Mount adds 1/4” to 1/2” in length. Available in black only.

© 2019, AIS, Inc.

Equal Height Post Fillers

2-WAY EQUAL HEIGHT POST FILLER

Panel H	Model Number	List	Grade C Paint
41	P-SAPF2E41	217	+10
53	P-SAPF2E53	234	+10
65	P-SAPF2E65	250	+10
80	P-SAPF2E80	257	+10



3-WAY EQUAL HEIGHT POST FILLER

Panel H	Model Number	List	Grade C Paint
41	P-SAPF3E41	179	+10
53	P-SAPF3E53	183	+10
65	P-SAPF3E65	194	+10
80	P-SAPF3E80	211	+10



4-WAY EQUAL HEIGHT POST FILLER

Model Number	List	Grade C Paint
P-SAPF4E	83	+10

Specify	Notes
• Paint Selection	Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Unequal Height Post Fillers

2-WAY UNEQUAL HEIGHT POST FILLER

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF24153	329	+10
41, 65	P-SAPF24165	346	+10
41, 80	P-SAPF24180	342	+10
53, 65	P-SAPF25365	357	+10
53, 80	P-SAPF25380	374	+10
65, 80	P-SAPF26580	374	+10



3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #1

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF314153	307	+10
41, 65	P-SAPF314165	325	+10
41, 80	P-SAPF314180	324	+10
53, 65	P-SAPF315365	325	+10
53, 80	P-SAPF315380	324	+10
65, 80	P-SAPF316580	337	+10



3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #2

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF324153	307	+10
41, 65	P-SAPF324165	325	+10
41, 80	P-SAPF324180	323	+10
53, 65	P-SAPF325365	325	+10
53, 80	P-SAPF325380	342	+10
65, 80	P-SAPF326580	337	+10



3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #3

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF334153	294	+10
41, 65	P-SAPF334165	313	+10
41, 80	P-SAPF334180	310	+10
53, 65	P-SAPF335365	310	+10
53, 80	P-SAPF335380	310	+10
65, 80	P-SAPF336580	306	+10



Specify

- Paint Selection

Notes

Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management. Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

© 2019, AIS, Inc.

Unequal Height Post Fillers

3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #4

Panel H	Model Number	List	Grade C Paint
41, 53, 65	P-SAPF34415365	435	+10
41, 53, 80	P-SAPF34415380	428	+10
41, 65, 80	P-SAPF34416580	428	+10
53, 65, 80	P-SAPF34536580	427	+10



3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #5

Panel H	Model Number	List	Grade C Paint
41, 53, 65	P-SAPF35415365	411	+10
41, 65, 80	P-SAPF35416580	429	+10
53, 65, 80	P-SAPF35536580	428	+10



3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #6

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF364153	292	+10
41, 65	P-SAPF364165	307	+10
41, 80	P-SAPF364180	325	+10
53, 65	P-SAPF365365	306	+10
53, 80	P-SAPF365380	325	+10
65, 80	P-SAPF366580	322	+10



4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #1

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF414153	215	+10
41, 65	P-SAPF414165	210	+10
41, 80	P-SAPF414180	219	+10
53, 65	P-SAPF415365	202	+10
53, 80	P-SAPF415380	215	+10
65, 80	P-SAPF416580	218	+10



Specify

- Paint Selection

Notes

Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management. Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

© 2019, AIS, Inc.

Unequal Height Post Fillers

4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #2

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF424153	219	+10
41, 65	P-SAPF424165	228	+10
41, 80	P-SAPF424180	225	+10
53, 65	P-SAPF425365	220	+10
53, 80	P-SAPF425380	231	+10
65, 80	P-SAPF426580	210	+10



4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #3

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF434153	206	+10
41, 65	P-SAPF434165	216	+10
41, 80	P-SAPF434180	225	+10
53, 65	P-SAPF435365	207	+10
53, 80	P-SAPF435380	218	+10
65, 80	P-SAPF436580	210	+10



4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #4

Panel H	Model Number	List	Grade C Paint
41, 53, 65, 80	P-SAPF441536580	419	+10



4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #5

Panel H	Model Number	List	Grade C Paint
41, 53, 65	P-SAPF45415365	308	+10
41, 53, 80	P-SAPF45415380	324	+10
41, 65, 80	P-SAPF45416580	323	+10
53, 65, 80	P-SAPF45536580	314	+10



Specify

- Paint Selection

Notes

Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management. Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

© 2019, AIS, Inc.

Unequal Height Post Fillers, End of Run Post Fillers and Wall Tracks

4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #6

Panel H	Model Number	List	Grade C Paint
41, 53	P-SAPF464153	207	+10
41, 65	P-SAPF464165	217	+10
41, 80	P-SAPF464180	226	+10
53, 65	P-SAPF465365	210	+10
53, 80	P-SAPF465380	219	+10
65, 80	P-SAPF466580	212	+10



4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #7

Panel H	Model Number	List	Grade C Paint
41, 53, 65	P-SAPF47415365	308	+10
41, 53, 80	P-SAPF47415380	324	+10
41, 65, 80	P-SAPF47416580	324	+10
53, 65, 80	P-SAPF47536580	315	+10



Specify

- Paint Selection

Notes

Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management. Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

END OF RUN POST FILLER

Panel H	Model Number	List	Grade C Paint
41	P-SAPFE41	215	+10
53	P-SAPFE53	225	+10
65	P-SAPFE65	241	+10
80	P-SAPFE80	264	+10



Specify

- Paint Selection

Notes

Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles. Post fillers are not needed for panel connection, stability, or structural integrity. Use as needed only for vertical wire management.

WALL TRACK

H	Model Number	List	Grade C Paint
60	A-WTRK60	136	+5
80	A-WTRK80	166	+5



Specify

- Paint Selection

Notes

Wall Track mounts to fixed walls to provide slotted channel for worksurface support brackets, tackboards or shelves. Slots are on 1" vertical repeat pattern. Wall track mounting holes are 1/4" diameter, repeating 6" on center starting 1/2" from top of track. Hardware for mounting Wall Track to walls is not included. Use hardware appropriate to wall type. Important: Wall track may not be shared between shelf units, flipper door units, or tackboards.

Important: Wall track may be shared with Matrix and AO2 storage. Wall track may not be shared with Divi and MWall storage.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Base Raceway Shrouds, Topcap Raceway Shrouds

2-WAY BASE RACEWAY SHROUD

Model Number	List	Grade C Paint
A-SACRWC	122	+10



Specify	Notes
• Paint Selection	2-Way Base Raceway Shroud is used to mask electrical cables and/or data cables that may be exposed at a 2-way, 90° connection. Unit snaps on securely. Note: Base raceway shroud is not required for structural integrity and is not needed at every 2-way connection. Use only when necessary to mask cables. Intended for 90° connections only.

3-WAY BASE RACEWAY SHROUD

Model Number	List	Grade C Paint
A-SATRWC	92	+10



Specify	Notes
• Paint Selection	3-Way Base Raceway Shroud is used to mask electrical cables and/or data cables that may be exposed at a 3-way, 90° connection. Unit snaps on securely. Base raceway shroud is not required for structural integrity and is not needed at every 3-way connection. Use only when necessary to mask cables. Intended for 90° connections only.

2-WAY TOPCAP RACEWAY SHROUD

Model Number	List	Grade C Paint
A-SA2WTCS	56	+10



Specify	Notes
• Paint Selection	2-Way Topcap Raceway Shrouds are used to mask data cables that may be exposed at a 2-way, 90° connection. Unit screws to the top of the panels with panel screws. Topcap raceway shroud is not required for structural integrity and is not needed at every 2-way connection. Use only when necessary to mask cables. Intended for 90° connections only.

3-WAY TOPCAP RACEWAY SHROUD

Model Number	List	Grade C Paint
A-SA3WTCS	107	+10



Specify	Notes
• Paint Selection	3-Way Topcap Raceway Shrouds are used to mask data cables that may be exposed at a 3-way, 90° connection. Unit screws to the top of the panels with panel screws. Topcap raceway shroud is not required for structural integrity and is not needed at every 3-way connection. Use only when necessary to mask cables. Intended for 90° connections only.

© 2019, AIS, Inc.

MWall Electrical Product Details

Product Detail 1
Electrical Components (8 Wire, 4 Circuit)

AIS MWall 8 Wire 4 Circuit electrical system contains four circuits. Each circuit is rated at 20 amps/120 volts maximum. Circuit 1, Circuit 2 and Circuit 3 are served by a system neutral and an equipment ground. Circuit 4 is dedicated and is served by its own neutral and ground. Circuit and ground conductors are #12 A.G.W. (gauge). All neutrals are #10 A.G.W. (gauge).

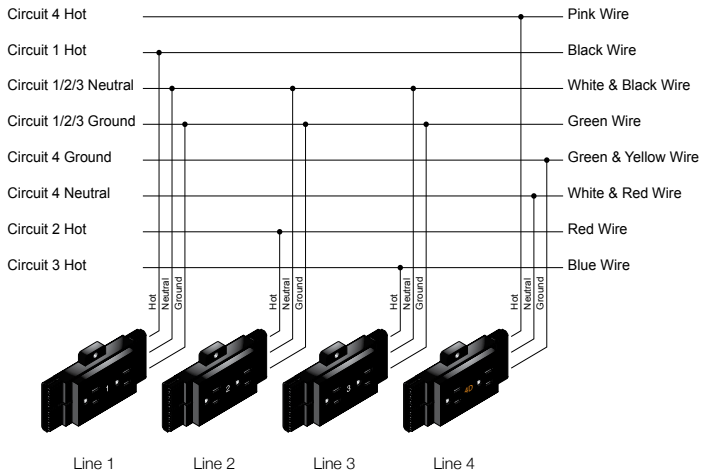

Shown below is cross section of metal cable used for 8 Wire 4 Circuit jumpers and in-feeds. Circuit and ground conductors are #12 A.G.W. (gauge). All neutrals are #10 A.G.W. (gauge).

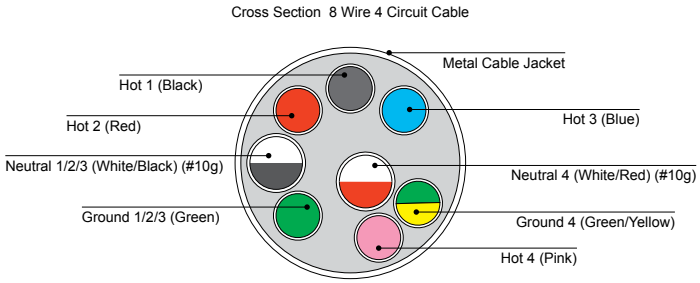

Powerways provide electrical distribution and access for duplex outlets back to back. 24" wide panels can accept only one duplex outlet per side, two total back to back. All other panels can accept two per side, four total back to back. Powerways "grow" in length with panels of greater width, making panel to panel connections a "standard" configuration and allowing for "pass through" connections. Each powerway has locations for up to four jumpers, two at each end. Powerways are included when ordering powered panels.

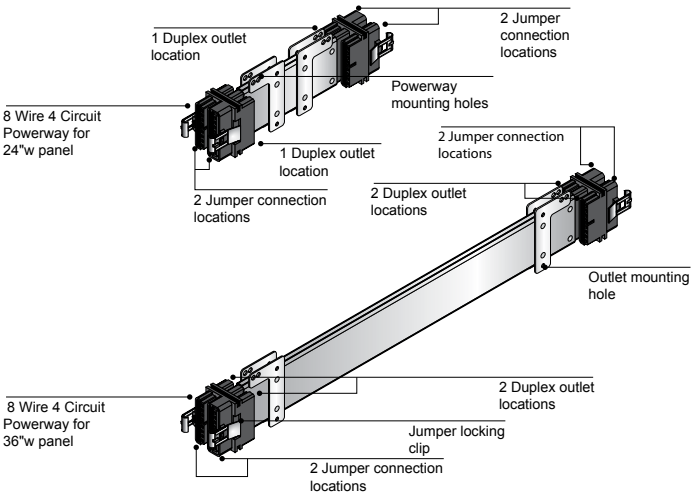

Duplex Outlets are available designated circuits 1 thru 4. Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways. All duplex outlets have black faces. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange. Outlets are screw mounted to powerway. Duplex outlets are standard 15 amp outlets. For 20 amp outlets, call AIS Customer Service.

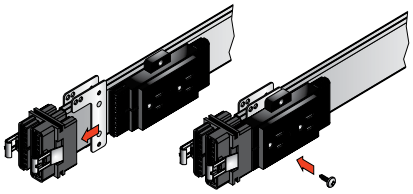

Common Equipment Amperages:

Personal Computer	2.00 - 4.00
Laser Printer	5.00 - 8.00
Desktop Plotter	1.50
Fan	1.00
Heater	8.50 - 12.50
Tasklight	1.00
Slide Projector	2.00 - 6.00
Coffee Pot	15.00
Paper Shredder	4.40 - 13.00
Radio	0.05
Pencil Sharpener	1.00
Calculator	0.25
Answering Machine	0.08

Revision Oct 2019
© 2019, AIS, Inc.

Product Detail 2
Beltline Electrical Components

Electrical components for the beltline raceway are the same as for the base raceway applications. Electrical specifications for straights, 2-way, 3-way, 4-way, and pass-through conditions are detailed on previous pages. For transitions from base raceway to beltline raceway, see facing page.

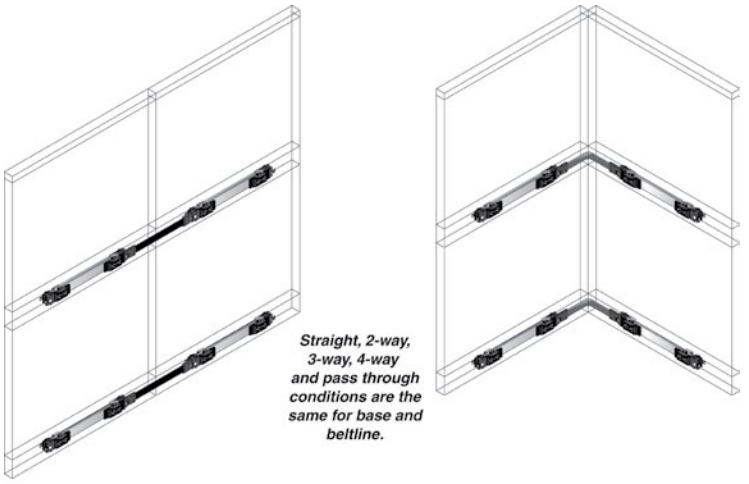

Straight, 2-way, 3-way, 4-way and pass through conditions are the same for base and beltline.

Electrical transition from base raceway to beltline raceway can be accomplished at any End, 2-WAY, 3-WAY OR 4-WAY condition with the use of a pass-through jumper for a 30"wide panel, model number E-MW8W4PJ30.
NOTE: TRANSITIONS AT 4-WAYS MUST BE RUN PRIOR TO INSTALLATION OF 4TH PANEL AT THE 4-WAY. CABLE CANNOT BE SNAKED THROUGH 4-WAY AFTER PANEL INSTALLATION.

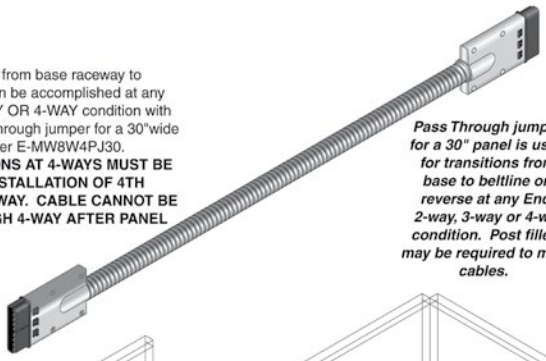

Pass Through jumper for a 30" panel is used for transitions from base to beltline or reverse at any End, 2-way, 3-way or 4-way condition. Post fillers may be required to mask cables.

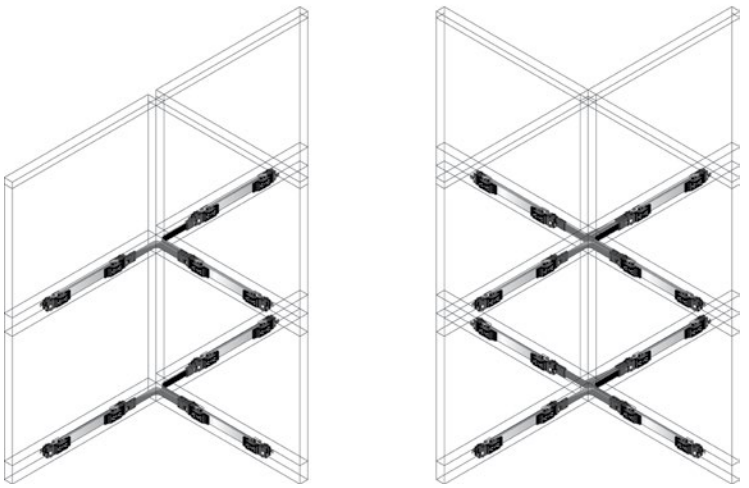

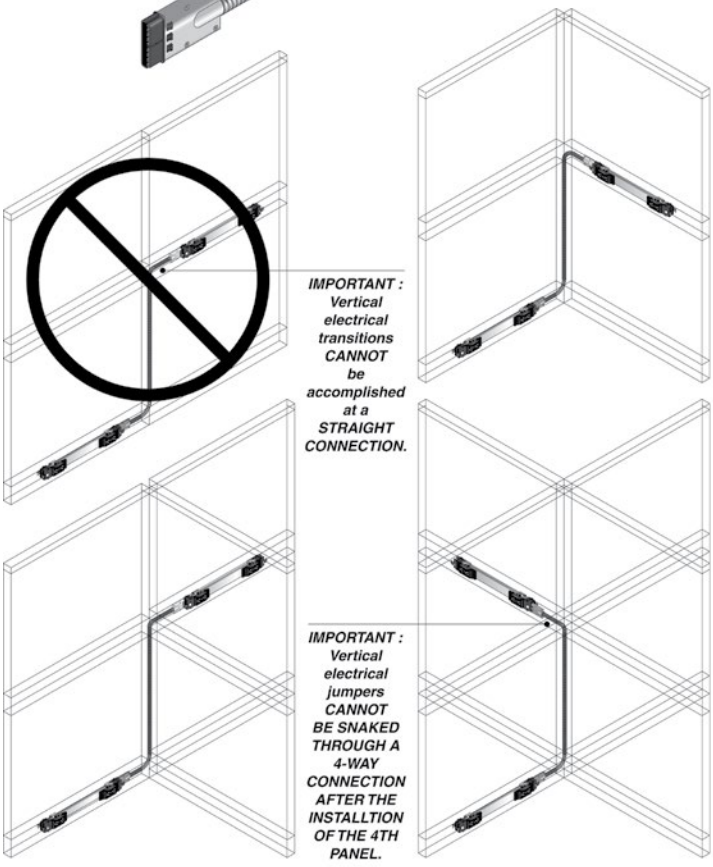

IMPORTANT : Vertical electrical transitions CANNOT be accomplished at a STRAIGHT CONNECTION.

IMPORTANT : Vertical electrical jumpers CANNOT BE SNAKED THROUGH A 4-WAY CONNECTION AFTER THE INSTALLTION OF THE 4TH PANEL.

© 2019, AIS, Inc.

MWall Electrical Product Details

Product Detail 3
Double Channel Power/Data Pole

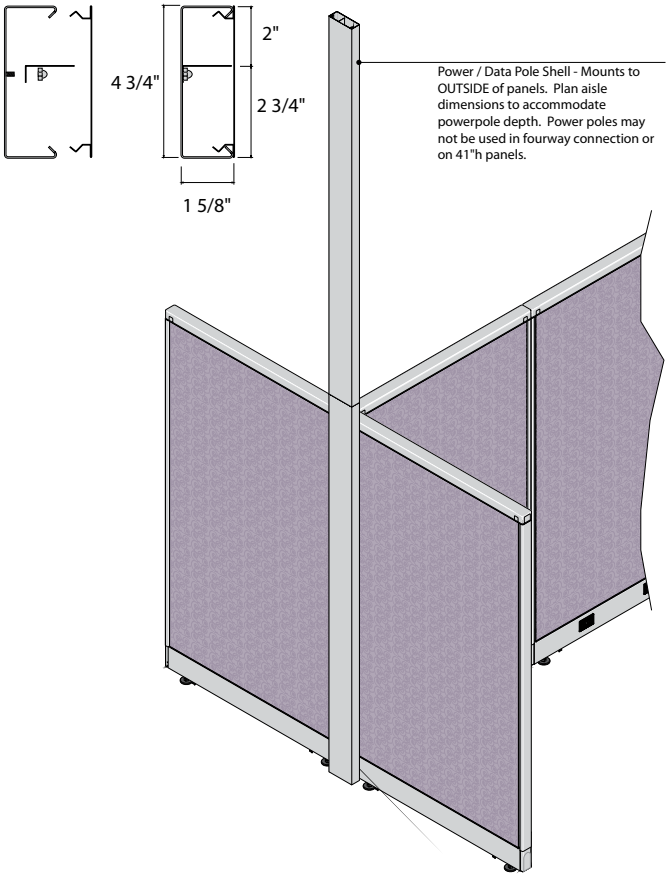

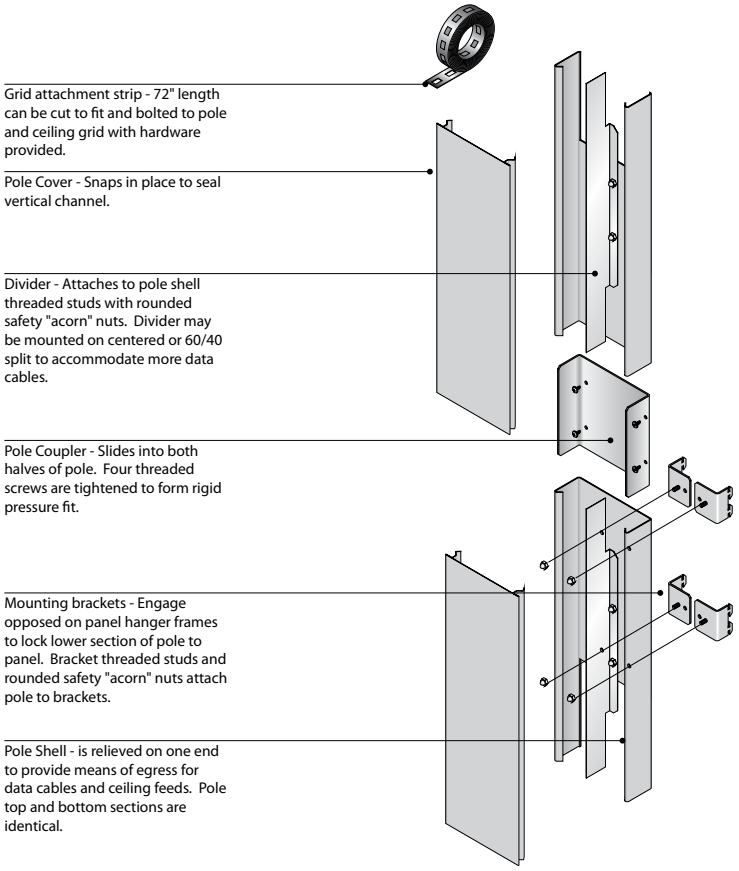

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Product Detail 4
In-Line Power/Data Pole

Conditions

Inline Pole conditions include end of run, 2-way, 3-way and 4-way situations. In-Line Poles may not be used at a Straight, Panel to Panel Connection.



Inline Pole Cross-sections

Inline pole capacity varies with post filler situations. 24 -32 cables max. Only 2-way equal height, 3-way equal height and 4-way equal height conditions can accomodate (2) Ceiling In-Feeds. Cross-section dimensions below are worst case conditions with post filler bracket restrictions.



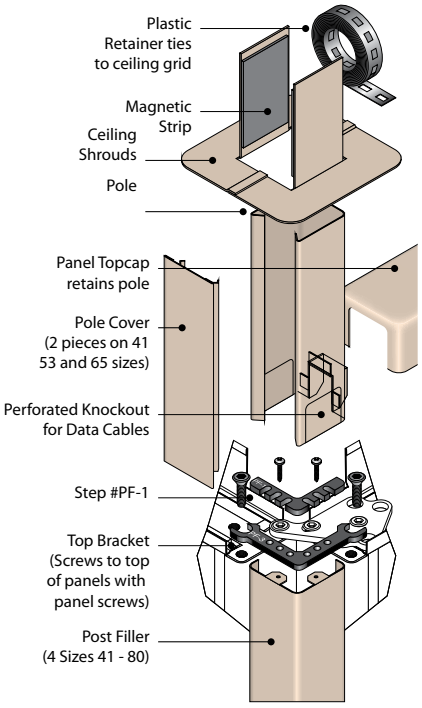

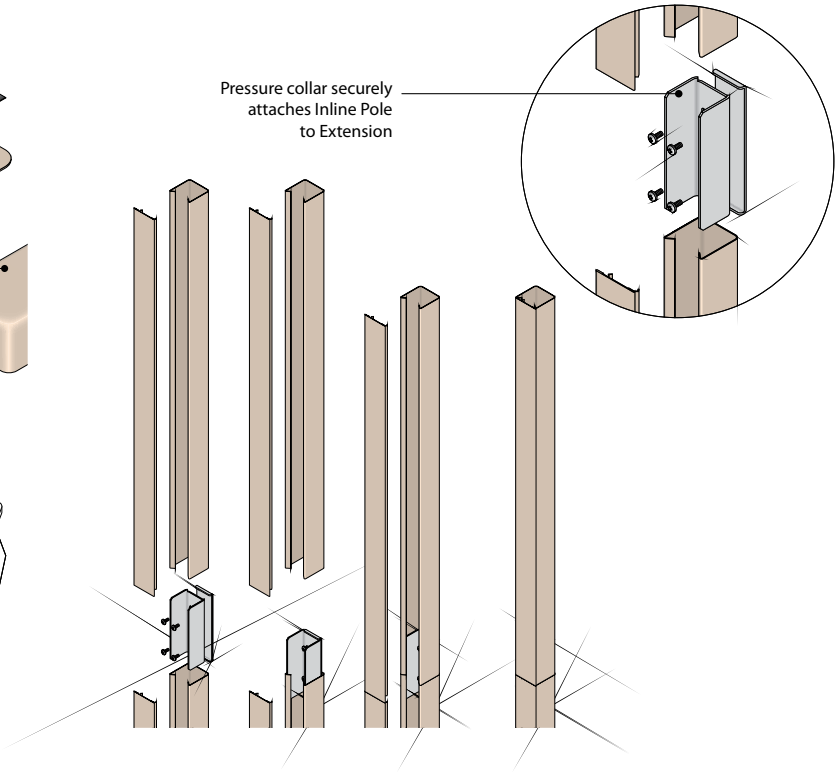

© 2019, AIS, Inc.

Panel-to-Panel and Lateral Jumpers

STANDARD PANEL-TO-PANEL JUMPERS

L	Model Number	List
18	E-MX8W4PTPC18	162



EXTENDED PANEL-TO-PANEL JUMPERS

L	Model Number	List
21	E-MX8W4PTPC21	170



Notes

Panel-to-Panel Jumper connects any two adjacent powered panels connected in a straight line or at a 90° angle. Order an Extended Panel-to-Panel Jumper to connect any two powered panels across the gap created by a 3-way or 4-way connection. 90° corners and straight panel-to-panel connections do not require an extended jumper.

LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
18	37	E-MW8W4PJ18	216
24	43	E-MW8W4PJ24	231
30	49	E-MW8W4PJ30	249
36	55	E-MW8W4PJ36	256
42	61	E-MW8W4PJ42	264
48	67	E-MW8W4PJ48	285
60	79	E-MW8W4PJ60	306



Notes

Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels. Specify the jumper that corresponds to the width of the panel to be passed through.

EXTENDED LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
18	39	E-MW8W4PJ18E	245
24	45	E-MW8W4PJ24E	241
30	51	E-MW8W4PJ30E	253
36	57	E-MW8W4PJ36E	261
42	63	E-MW8W4PJ42E	269
48	69	E-MW8W4PJ48E	292
60	81	E-MW8W4PJ60E	322



Notes

Extended Lateral Pass Through Jumpers are extended 1 11/16” to pass through a non-powered panel and the additional gap created by a 3-way or 4-way connection to connect two powered panels. 90° corners and straight panel-to-panel connections do not require an extended jumper. Specify the jumper that corresponds to the width of the panel to be passed through.

© 2019, AIS, Inc.

Duplex Outlets

DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4DO1	56
2	E-MW8W4DO2	56
3	E-MW8W4DO3	56
4	E-MW8W4DO4	56



Notes

Duplex Outlets are available at designated circuits 1 through 4. Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways. All duplex outlets have black faces. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange. Outlets are screw mounted to powerway. Duplex outlets are standard 15 amp outlets.

CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS

Line	Model Number	List
1	E-MW8W4T24DO1	66
2	E-MW8W4T24DO2	66
3	E-MW8W4T24DO3	66
4	E-MW8W4T24DO4	66



Notes

In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting. Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4. If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5. Outlets must have the "controlled" symbol for identification purposes.

USB OUTLETS

Line	Model Number	List
1	E-UN8W4USB01	243
2	E-UN8W4USB02	243
3	E-UN8W4USB03	243
4	E-UN8W4USB04	243



Notes

USB Outlets bring charging options to panel power distribution systems. The USB Outlets provide convenient charging power access through dual ports on the face of the receptacle. The USB Outlets offer a total of 2 Amps between two USB charging ports. The USB Outlets are UL and FCC Part 15A approved.

DUPLEX OUTLET HOLE COVERS

Model Number	List
E-UNWC	22



Specify

- Color Selection for Hole Cover

Notes

Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six). 24"W panels only include three duplex outlet hole covers. Order extra hole covers separately only when required.

Note: Certain areas of Chicago prohibit the use of modular electrical systems and require all electrical components to be hardwired. All electrical components need to be supplied by the electrician.

© 2019, AIS, Inc.

Side Mounted, Receptacle Mount and Ceiling In-Feeds

SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-UN8W4BIFS	364



Notes

Extended Lateral Pass Through Jumpers are extended 1 11/16" to pass through a non-powered panel and the additional gap created by a 3-way or 4-way connection to connect two powered panels. 90° corners and straight panel-to-panel connections do not require an extended jumper. Specify the jumper that corresponds to the width of the panel to be passed through.

NEW YORK CITY SIDE MOUNTED BASE IN-FEEDS

Length	Model Number	List
72	E-HM8W4BIFSNY	727

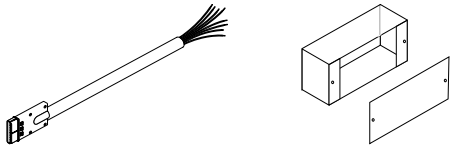

Notes

New York City Side Mounted Base In-Feeds provide interface with building power and mounts to side of powerway. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box.

RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-UN8W4BIFL	392
72	Right	E-UN8W4BIFR	392



Notes

Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location. Each base in-feed is 6' in length, encased in "liquid tight". Left hand base in-feed shown.

NEW YORK CITY RECEPTACLE MOUNT BASE IN-FEEDS

Length	Hand	Model Number	List
72	Left	E-HM8W4BIFLNY	762
72	Right	E-HM8W4BIFRNY	762

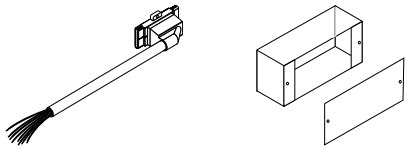

Notes

New York City Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location. Each base in-feed is 6' in length, encased in "liquid tight". New York City code requires the use of a special base feed with an in-line junction box. Left hand base in-feed shown.

CEILING IN-FEEDS

Length	Model Number	List
144	E-UN8W4CIF	443



Notes

Ceiling In-Feeds provide interface with building power from a suspended ceiling through a power pole shell. Each ceiling feed is 12' long. Power pole shells are ordered separately.

Note: Certain areas of Chicago prohibit the use of modular electrical systems and require all electrical components to be hardwired. All electrical components need to be supplied by the electrician.

Revision Oct 2019
© 2019, AIS, Inc.

Pole Kits

IN-LINE POWER/DATA POLE KIT

Panel H	Model Number	List	Grade C Paint
41	P-SAPFPP41	458	+10
53	P-SAPFPP53	407	+10
65	P-SAPFPP65	427	+10
80	P-SAPFPP80	360	+10



Specify	Notes
• Paint Selection	In-Line Power/Data Pole Kits are designed to install on top of a post filler in any situation. The in-line poles are designed with the same 1.7” x 1.7” profile of a post filler and are 136” tall. Pole kit does not include an electrical junction box. Designed for an 11’ ceiling. Post filler must be specified separately based on the appropriate situation. Pole fits over “step” and is retained by a panel topcap. Order the pole that corresponds to the highest panel in the post filler situation.

DOUBLE CHANNEL POWER/DATA POLE KIT

Model Number	List	Grade C Paint
A-PPDCSA	555	+20



Specify	Notes
• Paint Selection	Double Channel Power/Data Pole Kit includes two 68” pole sections, two 68” covers, one pole coupler, two 68” dividers, four pole to panel mounting brackets, one ceiling shroud, one 72” length of perforated metal strip for attaching pole to ceiling grid, and mounting hardware. Order ceiling feeds separately. Designed for an 11’ ceiling.

IN-LINE POLE EXTENSION KIT

Panel H	Model Number	List	Grade C Paint
28	P-SAPFIPX28	268	+10
38	P-SAPFIPX38	328	+10

Specify	Notes
• Paint Selection	In-Line Pole Extension Kits extend an in-line pole 28” or 38” for raised suspended ceilings. A 28” extension achieves a 13 1/2’. 38” extension achieves 14 1/2’. Extension includes pressure collar that rigidly attaches extension to an In-Line Pole.

© 2019, AIS, Inc.

Dataport Boxes, Retrofit Kits, Junction Boxes and Data Plate Kits

DATAPORT BOXES WITH VERTICAL WIRE MANAGER

Panel H	Model Number	List	Grade C Paint
41	A-SAVWMJB41	387	+10
53	A-SAVWMJB53	394	+10
65	A-SAVWMJB65	405	+10
80	A-SAVWMJB80	413	+10



Specify	Notes
• Paint Selection	Dataport Box with Vertical Wire Manager accommodates up to six data/voice cables in transition from MWall topcap raceway to worksurface height. Unit mounts to either left or right panel hanger frame (non-handed). Standard single gang GFI mounting holes work with many various data device plates. Order unit that corresponds to panel height. Box is 2" deep and 32" from floor to box bottom. Note: This unit is not compatible with MWall Z-Panels. Order data jacks and device plates separately.

ELECTRICAL RETROFIT KITS

W	Model Number	List	Grade C Paint
24	E-FRKMWP8424	278	+10
30	E-FRKMWP8430	295	+10
36	E-FRKMWP8436	309	+10
42	E-FRKMWP8442	328	+10
48	E-FRKMWP8448	343	+10
60	E-FRKMWP8460	376	+10



Specify	Notes
• Color Selection for Base Cover	Electrical Retrofit Kits are for field retrofitting existing non-powered MWall panels with 8 wire, 4 circuit electrical. Kit includes one powerway with mounting clips and screws, one powered base cover assembly and four duplex outlet hole covers. Duplex outlets, jumpers, extra hole covers or feeds are ordered separately.

HARDWIRE JUNCTION BOX

Model Number	List
E-MWJBCH	209



Specify	Notes
• Color Selection for Plate Covers	Hardwire Junction Box allows standard, hard wired, single gang duplex outlets to be used in MWall panels at each standard, modular duplex outlet location. Each outlet will require one junction box and outlets cannot be placed back to back on a spine. Junction boxes do not include electrical connectors. Boxes are UL listed. Decora faced outlets cannot be used. Kit includes all hardware required to attach box to MWall panel at duplex outlet location. Standard MWall powered base covers are required. Order MWall panels with Chicago base cover option. Boxes have standard 0.875" knockouts for electrical connectors. Kit includes one low profile metal face plate painted per specification. Junction boxes can be used with either 15 amp or 20 amp single gang outlets.

DATA PLATE KITS

Item	Model Number	List
Snap-In Data Plate w/ Extender Sleeve	A-MWDPESI	46
CAT 5e Jack	E-HRJ45-SM	93
CAT 6 Data Jack	E-HXJ6BK-SM	102
Hole Blank (10PK)	E-SFBB10-SM	62



Notes

Snap-In Housing have six ports. Housing is black. Housing snaps into AIS standard MWall duplex outlet holes, which measure 1.86" x 3.012".RJ-45 jacks can be used in place of RJ-11 jacks.Extender Sleeve (Black) is included and extends the data jack housing 5/8" from the base plate allowing more room for data jacks being utilized on powered panels. Extender sleeve snaps into the same 1.86" x 3.012" duplex outlet hole.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Cantilevers and Side Support/Rear Brackets

STANDARD CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List	Grade C Paint
24	18	Left	WPS-UNCT24L	72	+10
24	18	Right	WPS-UNCT24R	72	+10
24	18	Pair	WPS-UNCT24P	139	+20
30	25.5	Left	WPS-UNCT30L	139	+10
30	25.5	Right	WPS-UNCT30R	139	+10
30	25.5	Pair	WPS-UNCT30P	276	+20



Specify	Notes
• Paint Selection for Cantilevers	Standard Cantilevers provide cantilevered worksurface support from panel or wall track at either the left or right hand side of a worksurface. All worksurface support components fasten directly to worksurfaces with screws. Standard cantilevers may also be used as a center support. Specify cantilever that corresponds to worksurface depth. It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge. Painted black as standard, all other trim colors are Grade C upcharged.

SHARED CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List	Grade C Paint
24	18	Single	WPS-UNCT24S	103	+10
24	18	Pair	WPS-UNCT24SP	203	+20
30	25.5	Single	WPS-UNCT30S	203	+10
30	25.5	Pair	WPS-UNCT30SP	409	+20



Specify	Notes
• Paint Selection for Cantilevers	Shared Cantilevers provide cantilevered support from panel or wall track at seam between two worksurfaces. All worksurface support components fasten directly to worksurfaces with screws. Specify cantilever that corresponds to worksurface depth. It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge. Painted black as standard, all other trim colors are Grade C upcharged.

SIDE SUPPORT / REAR BRACKETS

Hand	Model Number	List	Grade C Paint
Left	WPS-SSSAL	51	+10
Right	WPS-SSSAR	51	+10
Pair	WPS-SSSA	100	+20



Specify	Notes
• Paint Selection for Side Support / Rear Bracket	Side Support/Rear Brackets provide direct support from panel or wall track along short side of rectangular worksurface or at rear of corner worksurface. All worksurface support components fasten directly to worksurfaces with screws. Painted black as a standard. All other trim colors are Grade C upcharged.

PANEL MOUNTED SHELF CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List	Grade C Paint
12	10	Left	WPS-CT10L	129	+10
12	10	Right	WPS-CT10R	129	+10
12	10	Pair	WPS-CT10P	248	+20



Specify	Notes
• Paint Selection	Panel Mounted Shelf Cantilevers are 10”d and designed to work in conjunction with 12”d worksurfaces to create additional desk top shelving. Available for all AIS panel systems. For use with 12” to 16” worksurfaces only.

© 2019, AIS, Inc.

End Panels and Brackets

STANDARD END PANELS

D	Model Number	List	Grade C Laminate
12	WFS-EPSA12	276	+20
18	WFS-EPSA18	324	+24
24	WFS-EPSA24	366	+27
30	WFS-EPSA30	407	+30
36	WFS-EPSA36	463	+34



Specify	Notes
• Laminate Selection for End Panel • 2mm Edge Selection for End Panel	Standard End Panels have laminated vertical surfaces and a 2mm PVC vertical front edge. Standard end panels provide direct support from floor at left or right side of a worksurface, and engage and lock to panels with provided mounting brackets. All worksurface support components fasten directly to worksurfaces with screws. Specify end panel that corresponds to worksurface depth.

CLEAR ACCESS END PANELS

D	Model Number	List	Grade C Laminate
24	WFS-EPCASA24	383	+29
30	WFS-EPCASA30	428	+32



Specify	Notes
• Laminate Selection for End Panel • 2mm Edge Selection for End Panel	Clear Access End Panels have laminated vertical surfaces and a 2mm vertical front edge. Clear access end panels provide direct support from floor at left or right side of a worksurface, and engage and lock to panels with provided mounting brackets. All worksurface support components fasten directly to worksurfaces with screws.

PEDESTAL-TO-PEDESTAL ATTACHMENT BRACKET

Model Number	List	Grade C Laminate
S-MWPMPB	181	+25

Specify	Notes
• Paint Selection	Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels. These brackets serve as a space filler and as a way to add stability to panels..Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal).

COUNTERTOP BRACKETS

Hand	Model Number	List	Grade C Paint
Left	WPS-CTBLSA	48	+10
Right	WPS-CTBRSA	48	+10
Pair	WPS-CTBSA	92	+20



Specify	Notes
• Paint Selection for Counter-top Bracket	Countertop Brackets provide direct support from 41"H panel for countertop worksurfaces. Specify at least two pair of countertop brackets for every countertop (one pair for front side and one pair for rear). All worksurface support components fasten directly to worksurfaces with screws.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Panel Mounted A-Legs

PANEL MOUNTED A-LEGS

H	D	Hand	Model Number	List	Grade C Paint
27	12	Left	WFS-ALW2712MWL	333	+25
27	12	Left Shared	WFS-ALW2712MWLS	358	+25
27	12	Right	WFS-ALW2712MWR	333	+25
27	12	Right Shared	WFS-ALW2712MWRS	358	+25
27	12	Freestanding	WFS-ALW2712FS	379	+25
27	24	Left	WFS-ALW2724MWL	379	+25
27	24	Left Shared	WFS-ALW2724MWLS	404	+25
27	24	Right	WFS-ALW2724MWR	379	+25
27	24	Right Shared	WFS-ALW2724MWRS	404	+25
27	24	Freestanding	WFS-ALW2724FS	403	+25
27	30	Left	WFS-ALW2730MWL	404	+25
27	30	Left Shared	WFS-ALW2730MWLS	429	+25
27	30	Right	WFS-ALW2730MWR	404	+25
27	30	Right Shared	WFS-ALW2730MWRS	429	+25
27	30	Freestanding	WFS-ALW2730FS	420	+25



Panel Mounted Left Hand



Panel Mounted Left Hand Shared



Panel Mounted Right Hand



Panel Mounted Right Hand Shared



Freestanding

Specify	Notes
• Paint Selection	A-Legs are constructed from 1” x 2” painted steel. Legs have 1 1/2” leveling glides. A-Leg welded construction allows for attachment to the worksurface. Panel attachment brackets are included and installed at the factory for panel mounted legs. Panel locking bracket for panel attachment situations ships separate. Freestanding A-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.

© 2019, AIS, Inc.

Mid-Height Shelf Units

MID-HEIGHT SHELF UNITS

H	W	D	Model Number	List	Grade C Paint
7.75	24	12	S-SHFHSAM24	233	+12
7.75	30	12	S-SHFHSAM30	241	+12
7.75	36	12	S-SHFHSAM36	250	+12
7.75	42	12	S-SHFHSAM42	264	+12
7.75	48	12	S-SHFHSAM48	292	+12
7.75	60	12	S-SHFHSAM60	308	+12



Specify	Notes
• Paint Selection	Mid-Height Shelf Units provide low profile overhead storage. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Unit includes two mid-height shelf ends, one shelf pan, and mounting hardware. Order shelf unit that corresponds to panel width.

SHELF DIVIDERS

Model Number	List	Grade C Paint
S-SHFDIV12	105	+10



Specify	Notes
• Paint Selection	Shelf Divider mounts to mid-height shelf decks and may also be used inside of complete flipper bins. No hardware necessary. Divider snaps into place. Divider is 5 5/8” tall and designed to finish at the same height as a mid-height shelf end.

LINEAR MID-HEIGHT SHELF UNITS

H	W	D	Model Number	List	Grade C Paint
7.75	24	12	S-SHFLSA24	233	+12
7.75	30	12	S-SHFLSA30	241	+12
7.75	36	12	S-SHFLSA36	250	+12
7.75	42	12	S-SHFLSA42	264	+12
7.75	48	12	S-SHFLSA48	292	+12
7.75	60	12	S-SHFLSA60	308	+12



Specify	Notes
• Paint Selection	Linear Mid-Height Shelf Units provide low profile overhead storage. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware. Order shelf unit that corresponds to panel width.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Mid-Height Corner Shelf Units

MID-HEIGHT CORNER SHELF UNITS

H	W	Center D	Wing D	Model Number	List	Grade C Paint
7.75	36	30.5	12	S-SHFHCSAM36	1,142	+25
7.75	42	30.5	12	S-SHFHCSAM42	1,317	+25
7.75	48	30.5	12	S-SHFHCSAM48	1,520	+25

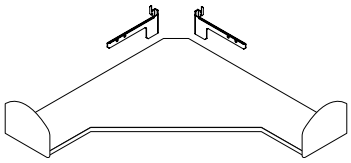

Specify	Notes
• Paint Selection	Mid-Height Corner Shelf Units provide low profile overhead storage in corner above corner worksurfaces. Shelf ends have locking swing cams to prevent dislodgement. Shelf has lateral strength bar welded parallel to front edge which will receive a 36" or smaller tasklight parallel to front edge. All shelves 33 5/8" across front edge and are 30 1/2" deep front to back corner. Back corner has 3 1/2" x 3 1/2" cutout to facilitate cable management. 42" and 48" units have 6" and 12" wings respectively. Unit includes two mid-height shelf ends, one bottom shelf pan, two corner shelf back mounting brackets, and mounting hardware. Order shelf unit that corresponds to panel width.

SHELF DIVIDERS

Model Number	List	Grade C Paint
S-SHFDIV12	105	+10



Specify	Notes
• Paint Selection	Shelf Divider mounts to mid-height shelf decks and may also be used inside of complete flipper bins. No hardware necessary. Divider snaps into place. Divider is 5 5/8" tall and designed to finish at the same height as a mid-height shelf end.

LINEAR MID-HEIGHT CORNER SHELF UNITS

H	W	Center D	Wing D	Model Number	List	Grade C Paint
7.75	36	30.5	12	S-SHFLCSA36	989	+25
7.75	42	30.5	12	S-SHFLCSA42	1,052	+25
7.75	48	30.5	12	S-SHFLCSA48	1,481	+25



Specify	Notes
• Paint Selection	Linear Mid-Height Corner Shelf Units provide low profile overhead storage in corner above corner worksurfaces. Shelf ends have locking swing cams to prevent dislodgement. Shelf has lateral strength bar welded parallel to front edge which will receive a 36" or smaller tasklight parallel to front edge. All shelves 33 5/8" across front edge and are 30 1/2" deep front to back corner. Back corner has 3 1/2" x 3 1/2" cutout to facilitate cable management. 42" and 48" units have 6" and 12" wings respectively. Unit includes two Linear Mid-height shelf ends, one bottom shelf pan, two corner shelf back mounting brackets, and mounting hardware. Order shelf unit that corresponds to panel width.

© 2019, AIS, Inc.

Type C Flipper Door Units

METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric	Easy Down
14.25	24	12	S-FDUMSAB24	601	+20	-5	+13	+24	+215
14.25	30	12	S-FDUMSAB30	615	+20	-5	+13	+24	+215
14.25	36	12	S-FDUMSAB36	635	+20	-5	+13	+24	+215
14.25	42	12	S-FDUMSAB42	648	+20	-5	+13	+24	+215
14.25	48	12	S-FDUMSAB48	690	+20	-5	+13	+24	+215
14.25	60	12	S-FDUMSAB60	836	+20	-5	+13	+24	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Paint or Fabric for Flipper Door Style
- Fabric Selection for Flipper Selection (if applicable)
- Easy Down Mechanism (optional)

Notes

Type C Flipper Door Unit - Metal/Fabric Door Front provides binder height, lockable overhead storage. Door opens and stores above top cover pan. Flipper unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy Down Mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional keys cores for keying alike or replacement uses.

LAMINATE DOOR FRONT TYPE C FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	Grade C Laminate	Easy Down
14.25	24	12	S-FDUMSAB24L	747	+20	+17	+215
14.25	30	12	S-FDUMSAB30L	761	+20	+18	+215
14.25	36	12	S-FDUMSAB36L	779	+20	+19	+215
14.25	42	12	S-FDUMSAB42L	796	+20	+20	+215
14.25	48	12	S-FDUMSAB48L	885	+20	+21	+215
14.25	60	12	S-FDUMSAB60L	982	+20	+22	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Laminate Selection for Flipper Door
- Edge Selection for Flipper Door
- Easy Down Mechanism (optional)

Notes

Type C Flipper Door Unit - Laminate Door Front provides binder height, lockable overhead storage. Door opens and stores above top cover pan. Flipper unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy Down Mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional keys cores for keying alike or replacement uses.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Type C Raised Flipper Door Units

METAL / FABRIC DOOR FRONT TYPE C RAISED FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	C.O.M Fabric	Grade C Fabric	Grade D Fabric	Perf Back	Easy Down
14.25	24	12	S-FDURFMW24	1,227	+20	-5	+13	+24	+35	+215
14.25	30	12	S-FDURFMW30	1,255	+20	-5	+13	+24	+35	+215
14.25	36	12	S-FDURFMW36	1,285	+20	-5	+13	+24	+35	+215
14.25	42	12	S-FDURFMW42	1,322	+20	-5	+13	+24	+35	+215
14.25	48	12	S-FDURFMW48	1,393	+20	-5	+13	+24	+35	+215
14.25	60	12	S-FDURFMW60	1,573	+20	-5	+13	+24	+35	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Paint or Fabric for Flipper Door Style
- Fabric Selection for Flipper Selection (if applicable)
- Metal or Perforated Back Panel Style
- Easy Down Mechanism (optional)

Notes

Type C Raised Flipper Door Unit - Metal/Fabric Door Front provides binder height, lockable overhead storage. When mounted on 53" high panels, unit rests level with a standard flipper door unit mounted at the top of a 65" high panel. Door opens and stores above top cover pan. Backside of unit is completely enclosed providing added security. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy down mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional keys cores for keying alike or replacement uses.

LAMINATE DOOR FRONT TYPE C RAISED FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	Grade C Laminate	Perf Back	Easy Down
14.25	24	12	S-FDURFMW24L	1,374	+20	+17	+35	+215
14.25	30	12	S-FDURFMW30L	1,401	+20	+18	+35	+215
14.25	36	12	S-FDURFMW36L	1,429	+20	+19	+35	+215
14.25	42	12	S-FDURFMW42L	1,469	+20	+20	+35	+215
14.25	48	12	S-FDURFMW48L	1,590	+20	+21	+35	+215
14.25	60	12	S-FDURFMW60L	1,723	+20	+22	+35	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Laminate Selection for Flipper Door
- Edge Selection for Flipper Door
- Metal or Perforated Back Panel Style
- Easy Down Mechanism (optional)

Notes

Type C Raised Flipper Door Unit - Laminate Door Front provides binder height, lockable overhead storage. When mounted on 53" high panels, unit rests level with a standard flipper door unit mounted at the top of a 65" high panel. Door opens and stores above top cover pan. Backside of unit is completely enclosed providing added security. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy down mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional keys cores for keying alike or replacement uses.

© 2019, AIS, Inc.

Type D Flipper and Raised Flipper Door Units

SOLID METAL DOOR FRONT TYPE D FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	Easy Down
14.25	24	12	S-FDDSMW24	733	+20	+215
14.25	30	12	S-FDDSMW30	750	+20	+215
14.25	36	12	S-FDDSMW36	766	+20	+215
14.25	42	12	S-FDDSMW42	782	+20	+215
14.25	48	12	S-FDDSMW48	821	+20	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Easy Down Mechanism (optional)

Notes

Type D Flipper Door Unit - Solid Metal Door Front provides binder height, lockable overhead storage. Door opens and stores above top cover pan. Flipper unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy down mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional key cores for keying alike or replacement uses.

SOLID METAL DOOR FRONT TYPE D RAISED FLIPPER DOOR UNITS

Interior H	W	Interior D	Model Number	List	Grade C Paint	Perf Back	Easy Down
14.25	24	12	S-FDDRMW24	1,360	+20	+35	+215
14.25	30	12	S-FDDRMW30	1,388	+20	+35	+215
14.25	36	12	S-FDDRMW36	1,419	+20	+35	+215
14.25	42	12	S-FDDRMW42	1,456	+20	+35	+215
14.25	48	12	S-FDDRMW48	1,527	+20	+35	+215





Easy Down Mechanism (Optional)

Specify

- Paint Selection
- Metal or Perforated Back Panel Style
- Easy Down Mechanism (optional)

Notes

Type D Raised Flipper Door Unit - Solid Metal Door Front provides binder height, lockable overhead storage. When mounted on 53" high panels, unit rests level with a standard flipper door unit mounted at the top of a 65" high panel. Door opens and stores above top cover pan. Backside of unit is completely enclosed providing added security. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Easy down mechanisms are optional for all sizes and recommended on 60" wide units. All flipper doors are lockable with two supplied keys. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks. Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. Order flipper unit that corresponds to panel width. See "Accessories" for ordering replacement keys, master keys, core removal keys, additional key cores for keying alike or replacement uses.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Sliding Door Units

METAL DOOR FRONT SLIDING DOOR UNITS

H	W	D	Model Number	List	Grade C Paint
14.25	30	12	S-MS2DOSA30	750	+20
14.25	36	12	S-MS2DOSA36	767	+20
14.25	42	12	S-MS2DOSA42	783	+20
14.25	48	12	S-MS2DOSA48	823	+20
14.25	60	12	S-MS2DOSA60	948	+20



Specify	Notes
• Paint Selection	Sliding Door Unit - Metal Door Front provides binder height, lockable overhead storage. Door slides open side to side. Sliding door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. All sliding doors are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

LAMINATE DOOR FRONT SLIDING DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Grade C Laminate
14.25	30	12	S-MS2DOSA30L	897	+20	+18
14.25	36	12	S-MS2DOSA36L	911	+20	+19
14.25	42	12	S-MS2DOSA42L	930	+20	+20
14.25	48	12	S-MS2DOSA48L	1,020	+20	+21
14.25	60	12	S-MS2DOSA60L	1,091	+20	+22



Specify	Notes
• Paint Selection • Laminate Selection for Sliding Door • Edge Selection for Sliding Door	Sliding Door Unit - Laminate Door Front provides binder height, lockable overhead storage. Door slides open side to side. Sliding door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. All sliding doors are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

© 2019, AIS, Inc.

Raised Sliding Door Units

METAL DOOR FRONT RAISED SLIDING DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Perforated Back
14.25	30	12	S-RMS2DOSA30	1,389	+20	+35
14.25	36	12	S-RMS2DOSA36	1,421	+20	+35
14.25	42	12	S-RMS2DOSA42	1,457	+20	+35
14.25	48	12	S-RMS2DOSA48	1,528	+20	+35
14.25	60	12	S-RMS2DOSA60	1,707	+20	+35



Specify

- Paint Selection

Notes

Type C Raised Sliding Door Unit - Metal Door Front provides binder height, lockable overhead storage. When mounted on 50” high panels, unit rests level with a standard flipper door unit mounted at the top of a 66” high panel. Door slides open side to side. Backside of unit is completely enclosed providing added security. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. All sliding doors are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

LAMINATE DOOR FRONT RAISED SLIDING DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Grade C Laminate	Perforated Back
14.25	30	12	S-RMS2DOSA30L	1,533	+20	+18	+35
14.25	36	12	S-RMS2DOSA36L	1,564	+20	+19	+35
14.25	42	12	S-RMS2DOSA42L	1,601	+20	+20	+35
14.25	48	12	S-RMS2DOSA48L	1,725	+20	+21	+35
14.25	60	12	S-RMS2DOSA60L	1,855	+20	+22	+35



Specify

- Paint Selection
- Laminate Selection for Sliding Door
- Edge Selection for Sliding Door

Notes

Type C Raised Sliding Door Unit - Laminate Door Front provides binder height, lockable overhead storage. When mounted on 50” high panels, unit rests level with a standard flipper door unit mounted at the top of a 66” high panel. Door slides open side to side. Backside of unit is completely enclosed providing added security. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. All sliding doors are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com

Revision Oct 2019
© 2019, AIS, Inc.

Cabinet Door Units

METAL DOOR FRONT CABINET DOOR UNITS

H	W	D	Model Number	List	Grade C Paint
14.25	24	12	S-VDOSA24	997	+20
14.25	30	12	S-VDOSA30	1,012	+20
14.25	36	12	S-VDOSA36	1,029	+20
14.25	42	12	S-VDOSA42	1,045	+20
14.25	48	12	S-VDOSA48	1,087	+20



Specify

- Paint Selection

Notes

Cabinet Door Unit - Metal Door Front provides binder height, lockable overhead storage. Doors swing open. Cabinet door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Units are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

LAMINATE DOOR FRONT CABINET DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Perforated Back
14.25	24	12	S-VDOSA24L	1,142	+20	+17
14.25	30	12	S-VDOSA30L	1,159	+20	+18
14.25	36	12	S-VDOSA36L	1,173	+20	+19
14.25	42	12	S-VDOSA42L	1,193	+20	+20
14.25	48	12	S-VDOSA48L	1,281	+20	+21



Specify

- Paint Selection
- Laminate Selection for Cabinet Door
- Edge Selection for Cabinet Door

Notes

Cabinet Door Unit - Laminate Door Front provides binder height, lockable overhead storage. Doors swing open. Cabinet door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Units are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

© 2019, AIS, Inc.

Raised Cabinet Door Units

METAL DOOR FRONT RAISED CABINET DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Perforated Back
14.25	24	12	S-RVDOSA24	1,624	+20	+35
14.25	30	12	S-RVDOSA30	1,651	+20	+35
14.25	36	12	S-RVDOSA36	1,682	+20	+35
14.25	42	12	S-RVDOSA42	1,721	+20	+35
14.25	48	12	S-RVDOSA48	1,790	+20	+35



Specify	Notes
• Paint Selection	Raised Cabinet Door Unit - Metal Door Front provides binder height, lockable overhead storage. Doors swing open. Cabinet door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Units are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

LAMINATE DOOR FRONT RAISED CABINET DOOR UNITS

H	W	D	Model Number	List	Grade C Paint	Grade C Laminate	Perforated Back
14.25	24	12	S-RVDOSA24L	1,770	+20	+17	+35
14.25	30	12	S-RVDOSA30L	1,796	+20	+18	+35
14.25	36	12	S-RVDOSA36L	1,827	+20	+19	+35
14.25	42	12	S-RVDOSA42L	1,866	+20	+20	+35
14.25	48	12	S-RVDOSA48L	1,987	+20	+21	+35



Specify	Notes
• Paint Selection • Laminate Selection for Cabinet Door • Edge Selection for Cabinet Door	Raised Cabinet Door Unit - Laminate Door Front provides binder height, lockable overhead storage. Doors swing open. Cabinet door unit has an open back. Shelf ends have locking swing cams to prevent dislodgement. Shelf bottom will receive tasklights. Units are lockable with (2) keys supplied. Lock cores are removable with removal keys and master keys are available. Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks. Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field. See “Accessories” for shelf, flipper and key accessories.

Electronic Libraries available at 2020.net and ProjectMatrix.com
Phone: 800.434.7400 Fax: 978.562.0811 Web: www.ais-inc.com
Revision Oct 2019
© 2019, AIS, Inc.

Tackboards, Tool Rail Kits and Panel Coat Hooks

TACKBOARDS

H	W	Model Number	List	C.O.M Fabric	Grade C Fabric	Grade D Fabric
12	24	A-TACKSAB1224	196	-5	+13	+24
12	30	A-TACKSAB1230	206	-5	+13	+24
12	36	A-TACKSAB1236	216	-5	+13	+24
12	42	A-TACKSAB1242	227	-5	+13	+24
12	48	A-TACKSAB1248	242	-5	+13	+24
12	60	A-TACKSAB1260	315	-5	+13	+24
15	24	A-TACKSAB1524	199	-5	+13	+24
15	30	A-TACKSAB1530	212	-5	+13	+24
15	36	A-TACKSAB1536	219	-5	+13	+24
15	42	A-TACKSAB1542	234	-5	+13	+24
15	48	A-TACKSAB1548	246	-5	+13	+24
15	60	A-TACKSAB1560	323	-5	+13	+24
19	24	A-TACKSAB1924	254	-5	+13	+24
19	30	A-TACKSAB1930	271	-5	+13	+24
19	36	A-TACKSAB1936	283	-5	+13	+24
19	42	A-TACKSAB1942	299	-5	+13	+24
19	48	A-TACKSAB1948	315	-5	+13	+24
19	60	A-TACKSAB1960	338	-5	+13	+24



Specify	Notes
• Fabric Selection	Tackboards are 7/8” thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices. Tackboards are available in three different heights.

TOOL RAIL KITS

H	W	Model Number	List	Grade C Paint
3.375	24	A-TBMW24	268	+20
3.375	30	A-TBMW30	293	+20
3.375	36	A-TBMW36	324	+20
3.375	42	A-TBMW42	345	+20
3.375	48	A-TBMW48	363	+20
3.375	60	A-TBMW60	536	+20



Specify	Notes
• Paint Selection	Tool Rail Kits mount to wall track or panel and accommodate paper flow elements. Tool rail kits are painted black as a standard. All other trim colors are Grade C upcharged.

PANEL COAT HOOKS

Model Number	List	Grade C Paint
A-CHM	52	+5



Specify	Notes
• Paint Selection	Panel Coat Hook mounts over top of panel and is available in all standard panel colors.

© 2019, AIS, Inc.

Whiteboards

WHITE BOARDS WITH MARKER TRAY

H	W	Model Number	List	Grade C Paint
24	24	A-WBMW2424	483	+15
24	30	A-WBMW2430	508	+15
24	36	A-WBMW2436	534	+15
24	42	A-WBMW2442	557	+15
24	48	A-WBMW2448	582	+15
24	60	A-WBMW2460	633	+15
30	24	A-WBMW3024	508	+15
30	30	A-WBMW3030	571	+15
30	36	A-WBMW3036	583	+15
30	42	A-WBMW3042	601	+15
30	48	A-WBMW3048	633	+15
30	60	A-WBMW3060	747	+15



Specify

- Paint Selection for Whiteboard

Notes

White Boards mount to panels with standard brackets. Marker Tray is included and available in black only. Marker Tray is field installed.

FRAMELESS WHITEBOARDS WITH MARKER TRAY

H	W	Model Number	List
24	24	A-FWBMW2424	310
24	30	A-FWBMW2430	357
24	36	A-FWBMW2436	403
24	42	A-FWBMW2442	449
24	48	A-FWBMW2448	466
24	60	A-FWBMW2460	554
30	24	A-FWBMW3024	334
30	30	A-FWBMW3030	389
30	36	A-FWBMW3036	443
30	42	A-FWBMW3042	498
30	48	A-FWBMW3048	554
30	60	A-FWBMW3060	664



Notes

Frameless White Boards with Markey Tray is a .6” thick laminated white board with 1mm white edgeband on all sides. Frameless White Boards mount to panels with standard brackets (included). Marker Tray is included and available in black only. Marker Tray is field installed.

© 2019, AIS, Inc.

National Showrooms:

Leominster
AIS Headquarters
25 Tucker Drive
Leominster, MA 01453

Chicago
The Merchandise Mart
Suite 1086
Chicago, Illinois 60654

New York
AIS New York
257 Park Avenue South
New York, New York 10010

Washington, D.C.
AIS Washington, D.C.
1400 I St, NW, Suite 750
Washington, D.C. 20005

GSA Sales
GSA Contract GS-29F-0006K
FSC Group 71,
Part 1 Office Furniture

For additional information on AIS:
Dealer Showrooms, Representative Directory, Project Case Studies, Online Catalog & Product Showcase
Visit: **www.ais-inc.com**

AIS

800.434.7400 | 978.562.7500 | Fax: 978.562.0811 | www.ais-inc.com | October 2019