



January 2026 Price List

AIS

PRODUCT INFORMATION

Terms and Conditions	3
Fabrics, Finishes and Lead Times	5

PANELS

Divi Fast Track Permanent Monolithic Panel Availability Details	6
Divi Linear Hard Surface Permanent Monolithic Panels	7
Divi Linear Tackable Surface Permanent Monolithic Panels	8
Divi Linear Quarter Glass Permanent Monolithic Panels	9

CONNECTORS

Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts	10
Divi Linear Post Filler Kits	11
Divi Linear Spacers	12

ELECTRICAL

Lateral Pass Through Jumpers and Panel-to-Panel Jumpers	13
Duplex Outlets	14
Base Infeeds and Ceiling Infeeds	15
Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes	16
In-Line Power/Data Pole Combination Kits	17
In-Line Power/Data Pole Retrofit Kits and Pole Dividers	18

TABLES

Height Adjustable Tables and Round Tables	19
---	----

WORKSURFACES

Grommet Specifications	20
Rectangular and Curvilinear Corner Worksurfaces	21
Divi Bullpen Surfaces	22
Rectangular Worksurfaces for Height Adjustable Tables	23

SUPPORT

Height Adjustable Table Bases	24
A-Legs	25
Divi Panel Mounted A-Legs	25
N-Legs, Combination Legs and Pedestal-to-Panel Attachment Brackets	26
Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels	27

CLIP SCREENS

Clip Screen Product Details	28
Glass 1/4" Panel Top Surface Mount Clip Screens	29
Glass 3/8" Panel Top Surface Mount Clip Screens	30

STORAGE

Mid-Height Shelf and Flipper Doors Units	31
L Series Pedestals	32
L Series Laterals and Replacement Pulls	34

ACCESSORIES

Task Lights and Task Light Cord Managers	35
Monitor Arms	36
Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats	37
Tackboards	38
Lock Cores and Keys	39

SEATING

Task Chairs	40
Side Chairs	41
Volker Cubes	42

Terms and Conditions

Pricing & Discounts

Pricing is determined by size of order and other criteria. Refer to your Divi Fast Track Pricing Program for complete guidelines.

- Note discount being used.
- The list and net amount of order must be clearly indicated on all purchase orders.
- Account must be in good standing and have no past due balance for purchase order to be accepted.
- If there are any discrepancies on a purchase order, dealer will be required to sign off on final order detail. Signature by dealer constitutes acceptance of new purchase order amount and item details contained therein.

Order Changes & Cancellations

Order changes and cancellations are not allowed with the Fast Track program due to the enhanced lead times.

Order Submission

Orders should be placed electronically through the AIS website using Order Request in DealerNet – <https://dealernet2.ais-inc.com/Orders/Submit>. Any questions on how to submit and track orders should be directed to your Customer Service Representative.

For questions about Divi Fast Track please contact your CSR or email: divifasttrack@ais-inc.com

P.O.'s should clearly state "Divi Fast Track" in subject line and have the electronic file.

Purchase orders must be received by 12:00 PM EST in order for the following day to be considered start of ship date lead time.

All orders must be submitted with a consolidated SP4 or Sif.

Dealer must specify which discount structure they are using- SPIF or no SPIF.

Orders can be tracked online at
<https://dealernet2.ais-inc.com/Requests/>

Payment Terms

A signed purchase order is required for all orders, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). First time orders require a 50% deposit, unless waived by an officer of Affordable Interior Systems, Inc. (AIS). With approved credit, all balances are due within 30 days of invoice date.

Credit

Three trade references (including bank and account number) are required. All accounts with balances beyond 30 days of invoice date will be put on credit hold until the balance is paid in full.

Acknowledgments

Every order is acknowledged via e-mail. Dealer must sign the acknowledgment and return to Customer Service within 24 hours. Orders will be manufactured and invoiced based upon the information on the acknowledgment. If there is any discrepancy, please notify AIS immediately. Orders are accepted by AIS per terms on the acknowledgment. Note order is in production when acknowledgment sent.

If you do not want the merchandise earlier than the specified date, please write "Do not ship for arrival before _____" on your purchase order.

Add On Orders

Add on orders are allowed within 30 days to receive the same discount. Actual freight applies. Please contact Customer Service for a freight code. Must be Divi Fast Track product to receive add-on discount.

Sales Tax

Affordable Interior Systems, Inc. is registered with multiple states. In this case, we are required by law to collect and remit sales tax to the states in which we are registered. Please download and complete the Multi-Jurisdictional Sales Tax Exemption Form from our website for all states which your company has a valid resale tax exemption certificate. Fax a completed form to our Accounting Department at (978) 562-0811. Multi-Jurisdictional Sales Tax Exemption Forms are available on DealerNet.

Freight Policy

FOB origin, freight pre-paid. Delivery includes standard Monday through Friday 7am to 5pm deliveries.

Tracking Shipments

You will receive an email confirmation once your order has shipped that includes the following information: carrier, contact information and shipping reference number. AIS strongly encourages you to contact the carrier in order to track your shipments closely for an estimated delivery date.

Guaranteed Deliveries

AIS will gladly accept requests for delivery times and for drop shipments to job sites on full truckload shipments. AIS is not able to guarantee specific delivery times for any less than truckload (LTL) shipments. Please contact AIS Customer Service if you require delivery on a specific day during standard business hours and for a non-rushed shipment. We offer a guaranteed two hour window receipt on full truckload shipments for \$250 for one truckload, or two or more truckloads for \$500 during standard business hours. Your CSR must be notified a week prior to your ship date otherwise additional fees may apply. After-hours, holiday and weekend shipments may be arranged for an additional charge on full truckload shipments. Please contact AIS Customer Service for those rates. Please note that in the case of a missed guaranteed shipment the carrier is only liable for that additional charge, not for labor or other damages.

Call Before Deliveries

You may arrange a delivery with the carrier by noting "Call Before Delivery" on your order, which will typically delay receipt of the product to you by about one day. You cannot add a call before delivery on a truckload shipment if you also have a guaranteed delivery arranged. Please note that call before deliveries are estimates only and should not be used when shipping direct to a job site. AIS is not responsible for any damages incurred for any late deliveries, including labor or any other charges resulting from unforeseen delays by any AIS or dealer chosen carrier. AIS strongly urges dealers to take into consideration the risk that carriers typically allow for a 2 day delivery range.

Consolidating Orders

AIS acknowledges orders with a two day ship date range. We are committed to shipping your products within that acknowledged range. Shipments may be combined and consolidated in order to create a full truckload shipment. Shipments may also be hand loaded in order to avoid LTL spillover. Full truckload shipments have less variable transit times as well as significantly less freight damage. Our goal is always to provide you with the best possible delivery service. Transportation efforts are managed as part of an ongoing effort to improve AIS's transportation efficiency thereby saving fuel, reducing emissions, and reducing air pollution associated with AIS's transportation activities.

Please note:

Dealer may incur additional carrier Accessorial Fees if not specified and quoted at the time of order for the following, which may include but are not limited to:

- No loading dock
- Redirect of product
- Refusal of product
- Storage
- Special truck size (standard is 53" trailer)
- Street unloads
- Lift gate requirement
- Detention charges after 2 hours of unload time for TL and 30 minutes for LTL

Terms and Conditions

Deductions

Deductions from invoices are not allowed, for any reason, without authorization from AIS.

Delay of Shipment

Acceptance of AIS acknowledgment confirms order ship date. If dealer requests delay of shipment for any period greater than one day from scheduled ship date, storage fees will be assessed. Dealer must submit purchase order for estimated storage costs.

Freight Claims

AIS will file freight claims for loss or damage if policy is followed. In order to make this policy maintainable, certain requirements must be met by the consignee in accordance with freight laws and carrier policies. These requirements are as follows:

All damage or lost freight should be reported to AIS within 72 hours of receipt. In the case of obvious damage, it must be noted in short detail on delivery receipt (i.e. scratched surfaces, dented cartons, missing pieces).

If missing or damaged freight is discovered after receipt is completed, consignee must notify Carrier or AIS within 72 hours and request a corrected delivery receipt acknowledging loss or damage.

A detailed list of missing or damaged pieces is required in order to assess the value of the claim. Upon receipt of this information, AIS will contact the carrier and request an inspection or waiver thereof.

In the case of concealed damage, AIS must be informed within 10 days of receipt of product. All damaged product and packaging must be preserved as received pending an inspection or waiver of inspection by the carrier. All product that has a claim pending against it must be available for carriers to salvage once the claim is paid.

It is highly encouraged that digital photos are taken of any suspected freight damage. Photographic evidence substantiating claims should be provided electronically to AIS.

Any failure to adhere to these policies and procedures will result in claim responsibility shifting from AIS to the consignee.

Force Majeure

Seller shall not be liable for failure to perform or for delay in performance due to fire, flood, strike, or any other labor difficulty, act of God, act of any governmental authority or of the Purchaser, riot, embargo, fuel or energy shortage, wrecks or delay in transportation, inability to obtain necessary labor, materials, or manufacturing facilities from usual sources or failure of suppliers to meet their contractual obligations or due to any cause beyond its reasonable control. In the event of delay in performance due to any such cause, Seller reserves the right to extend the date of delivery or time for completion by a period of time reasonably necessary to overcome the effect of such delay, to allocate any available supply of goods in a manner it deems reasonable, or to cancel any purchase order.

Liability

Seller, its contractors, authorized dealers and subcontractors or suppliers of any tier shall not be liable in contract, in tort (including negligence and/or strict liability) or otherwise for any special, indirect, incidental or consequential damages whatsoever, including, without limitations, damages or loss of other property or equipment, loss of profits or revenue or loss of use of equipment (including additional expenses incurred in using existing facilities). The remedies set forth herein are exclusive, and the liability of Seller with respect to any contract or anything done in connection therewith, such as the performance or breach thereof, or from the manufacture, sale, delivery, resale or use of any Product covered by or furnished under the order, whether in contract, in tort (including negligence and/or strict liability) or otherwise shall not exceed the price of the Product or part on which such liability is based.

Local Codes

Seller considers its product to be office furniture and subject to all applicable local fire, electrical and building codes. Since local codes may vary, the purchaser is responsible for the proper application and installation of AIS product in accordance

with the requirements of these local codes. Engineering, research and testing have been conducted to have electrical components of AIS products conform to national electrical codes. Only Underwriters Laboratories (UL) tested and approved electrical components are used in electrical devices. See www.UL.com for complete UL listing information. In addition, all panels and components used by AIS have been UL approved. Seller shall not be responsible for any damages or expenses resulting from Purchaser's specifications not conforming to the requirements of the law or local building codes, unless it specifically agrees in writing to do so. Since Seller has no control over the use to which others may put its Products, each user or specifier should determine the Products' suitability for the particular application.

Limited Lifetime Warranty

This warranty is given to the initial purchaser and is valid for as long as the product is owned by the original Buyer. The warranty, which runs from the date of manufacture, covers defects in materials and craftsmanship found during normal usage of the products during the warranty period. If a product is defective, and if written notice of the defect is given to AIS within the applicable warranty period, AIS (at its option) will either repair or replace the defective product with a comparable component or product. The limited lifetime warranty applies to all products regardless of the numbers of shifts the product is used each day except as noted below.

Applicable Warranty Period	Products / Restrictions
Lifetime (as defined below)	All AIS branded products (except as noted below)
Ten (10) Years	Electrical products (including Height Adjustable Tables)
Five (5) Years	Moving parts, which include keyboard mechanisms, locks, suspensions, height adjustable table mechanisms, casters as well as all AIS fabrics / upholstery.
Five (5) Years	Calibrate Laminate Storage / Casegoods, Casegood cushions (with upholstery fabric)

This warranty does not apply to "normal wear and tear", damage caused by carrier, damage caused by transport of product from one site or location to another, alterations to the product not expressly authorized by Seller, and products considered to be of a consumable nature such as bulbs and light ballast. It also does not apply to "customer's own material" (i.e. material specified by Buyer that is not a standard AIS product offering) used in the manufacture of AIS products. A product will not be considered defective, and Seller will not be obligated to replace it, if the product is not installed properly or is used in a "non-standard" fashion as prescribed by AIS. It is at the sole discretion of AIS to make a determination if a defect is due to improper product installation.

This warranty is presented in lieu of all other warranties, express or implied, including, but not limited to, any implied warranties of merchantability of fitness for a particular purpose. The customers exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be repair or replacement as specified above.

Seller (AIS) shall not be liable under any circumstances for consequential, economic, or incidental damages of any nature, including without limitation, damages for personal injury or damages to property, and however occasioned, whether alleged as resulting from breach of warranty or contract by AIS or negligence of AIS or otherwise.

International warranties may differ.

AIS Supported Specification Software

AIS provides (at no cost) symbols and data libraries for the following applications. Only Authorized AIS Dealers may purchase AIS products. AIS supported software libraries are:

20-20 GIZA
20-20 CAP
Project Matrix

Fabrics, Finishes and Lead Times

DIVI FAST TRACK FINISH OPTIONS

Vertical Surface Fabrics		Laminate Options		Raceway Color Options	
Name	Grade	Name	Grade	Name	
Avenue	A	Absolute Acajou†	A	Black	
Cape Cod	A	Aimtoo Savatre	A	Grey Value 1	
Engage	A	Looks Likatre†	A	Medium Tone	
Mirador	A	Maritime Dune†	A	Satin White	
New England	A	Midwest Maple	A		
Rainfall	A	Summer Drops	A		
Simplicity	A	True White	A		
Twizzle	A	Trytoo Savatre†	A		
		White Chocolate†	A		

Upholstery Fabric Options*

Name	Grade
Mirador	A

Mirador comes standard as an antimicrobial upholstery.

*Available on ped cushions and Volker Cubes only.

Divi Trim, Base, Storage and X-Base Paint Finish Options

Name	Color Code	Divi Panel Grade	Divi Base Grade
Black	BK	A	A
Grey Value 1	GV1	A	A
Medium Tone	MT	A	A
Satin White	SW	A	A

Height Adjustable Table Paint Finish Options

E Series and Day-to-Day Base Options

Name	Grade
Black	A
Metallic Silver	A
Satin White	A

†Indicates a textured laminate.

2MM Edgeband Options

Name	Grade
Absolute Acajou	A
Aimtoo Savatre	A
Black	A
Grey Value 1	A
Looks Likatre	A
Maritime Dune	A
Medium Tone	A
Midwest Maple	A
Satin White	A
Summer Drops	A
True White	A
Trytoo Savatre	A
White Chocolate	A

Lead Time

See Lead Time Guide on DealerNet for current lead times.

Lead time does not include 24-hour order processing period.

Orders missing part numbers and corresponding required finish information are considered incomplete. These orders will not be processed until correct information is received.

Lead time begins 24 hours after receipt of complete and processable order as defined in the purchase order requirement section of this program.

Lead time for orders containing non-program items may vary. AIS Customer Service can assist in clarifying mixed order lead time.


Blended orders will have lead times assigned per items on actual order.

At AIS, we take great pride in offering a diverse selection of high-quality materials including but not limited to textiles, laminates, PET, mesh, etc. However, AIS cannot guarantee uniformity in dye lots across different production runs. As such, AIS is not liable for any variations in dye lots or color discrepancies in any of our products that may occur between orders. We encourage customers to review samples for color and texture matching prior to purchase. We are committed to providing exceptional products and are confident that our selection of textiles will meet your expectations for both aesthetic appeal and durability.

Divi Fast Track Permanent Monolithic Panel Availability Details

Permanent Monolithic Panel Availability

Fabric Covered - Hard Surface - Powered/Non-Powered:

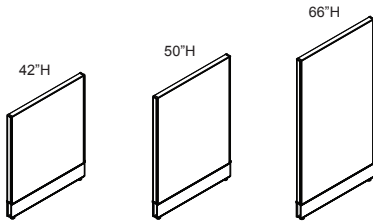


Nominal Heights:

42", 50", 66" (Actual Min. Height = Nominal - $\frac{1}{16}$ ") - 1 $\frac{1}{2}$ " Leveling Glide Range

Widths:

24", 30", 36", 42", 48", 60" (Actual Width = Nominal + $\frac{1}{8}$ ")

Fabric Covered - Tackable Surface - Powered/Non-Powered:




Nominal Heights:

50", 66" (Actual Min. Height = Nominal - $\frac{1}{16}$ ") - 1 $\frac{1}{2}$ " Leveling Glide Range

Widths:

24", 30", 36", 42", 48", 60" (Actual Width = Nominal + $\frac{1}{8}$ ")

Quarter Glass - Fabric Covered Hard Surface - Powered/Non-Powered:




Nominal Heights:

50", 66" (Actual Min. Height = Nominal - $\frac{1}{16}$ ") - 1 $\frac{1}{2}$ " Leveling Glide Range

Widths:

24", 30", 36", 42", 48" (Actual Width = Nominal + $\frac{1}{8}$ ")


Permanent Monolithic Panel Profile



Duplex outlets are ordered separately. Two outlets can be used per side, four total per panel. Outlets utilize top base cover holes.

Duplex outlet covers hide unused duplex outlet or data locations. Six are shipped with every panel. A 24"W gets three duplex outlet covers. Order extra as needed.

Snap-in data jack housing (order separately) accommodates six Hubbell or compatible data/voice jacks. Snap-in housings may not be used back to back on a spine wall.





Data cable raceway cavity is approximately 2" wide by 3" tall and can accommodate between 32 and 40 Cat 6 data cables, depending on how tightly they are packed.

Cat 5 and 6 data jacks extend beyond center line of raceway, preventing jack housings to be used back to back on a spine. Plan on using "cross corners" on panel to eliminate this issue.

Divi Linear Hard Surface Permanent Monolithic Panels

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC
NON-POWERED PANELS


H	W	Model Number	List
42	24	P-DLFRPM4224	751
42	30	P-DLFRPM4230	813
42	36	P-DLFRPM4236	868
42	42	P-DLFRPM4242	921
42	48	P-DLFRPM4248	975
42	60	P-DLFRPM4260	1,166
50	24	P-DLFRPM5024	806
50	30	P-DLFRPM5030	896
50	36	P-DLFRPM5036	980
50	42	P-DLFRPM5042	1,070
50	48	P-DLFRPM5048	1,165
50	60	P-DLFRPM5060	1,385
66	24	P-DLFRPM6624	927
66	30	P-DLFRPM6630	1,025
66	36	P-DLFRPM6636	1,113
66	42	P-DLFRPM6642	1,208
66	48	P-DLFRPM6648	1,300
66	60	P-DLFRPM6660	1,556



Divi Linear Trim

DIVI LINEAR HARD SURFACE PERMANENT MONOLITHIC
POWERED PANELS

H	W	Model Number	List
42	24	P-DLFPPM4224	1,154
42	30	P-DLFPPM4230	1,213
42	36	P-DLFPPM4236	1,263
42	42	P-DLFPPM4242	1,312
42	48	P-DLFPPM4248	1,370
42	60	P-DLFPPM4260	1,554
50	24	P-DLFPPM5024	1,210
50	30	P-DLFPPM5030	1,291
50	36	P-DLFPPM5036	1,374
50	42	P-DLFPPM5042	1,463
50	48	P-DLFPPM5048	1,554
50	60	P-DLFPPM5060	1,767
66	24	P-DLFPPM6624	1,321
66	30	P-DLFPPM6630	1,416
66	36	P-DLFPPM6636	1,517
66	42	P-DLFPPM6642	1,598
66	48	P-DLFPPM6648	1,691
66	60	P-DLFPPM6660	1,936



Divi Linear Trim

Specify

Notes

- Fabric Selection for Side A and B
 - Paint Selection for Panel Trim
 - Color Selection for Base Cover
 - Raceway Divider Option (+50)
 - Data Access Option (+15)
- Permanent Monolithic Non-Powered Panels - Hard Surface are fabric covered hard surface panels.
 - Panels may be ordered with power/data access base covers and/or raceway divider.
 - Each panel includes all connection hinges needed for each panel.
 - Features Divi Linear trim.

Specify


Notes

- Fabric Selection for Side A and B
 - Paint Selection for Panel Trim
 - Color Selection for Base Cover
 - Raceway Divider Option (+50)
- Permanent Monolithic Powered Panels - Hard Surface are fabric covered hard surface panels.
 - Includes 8 wire 4 circuit powerway and power/data access base covers.
 - Panels may be ordered with a raceway divider.
 - Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers.
 - Each panel includes all connection hinges needed for each panel.
 - Duplex outlets and electrical jumpers are specified separately. See "Electrical".
 - Features Divi Linear trim.

Divi Linear Tackable Surface Permanent Monolithic Panels

DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC
NON-POWERED PANELS


H	W	Model Number	List
50	24	P-DLTRPM5024	980
50	30	P-DLTRPM5030	1,005
50	36	P-DLTRPM5036	1,123
50	42	P-DLTRPM5042	1,199
50	48	P-DLTRPM5048	1,276
50	60	P-DLTRPM5060	1,520
66	24	P-DLTRPM6624	1,106
66	30	P-DLTRPM6630	1,183
66	36	P-DLTRPM6636	1,269
66	42	P-DLTRPM6642	1,350
66	48	P-DLTRPM6648	1,431
66	60	P-DLTRPM6660	1,681



Divi Linear Trim

DIVI LINEAR TACKABLE SURFACE PERMANENT MONOLITHIC
POWERED PANELS

H	W	Model Number	List
50	24	P-DLTPPM5024	1,416
50	30	P-DLTPPM5030	1,478
50	36	P-DLTPPM5036	1,554
50	42	P-DLTPPM5042	1,635
50	48	P-DLTPPM5048	1,706
50	60	P-DLTPPM5060	1,956
66	24	P-DLTPPM6624	1,522
66	30	P-DLTPPM6630	1,601
66	36	P-DLTPPM6636	1,681
66	42	P-DLTPPM6642	1,762
66	48	P-DLTPPM6648	1,844
66	60	P-DLTPPM6660	2,092



Divi Linear Trim



Specify	Notes
<ul style="list-style-type: none"> Fabric Selection for Side A and B Paint Selection for Panel Trim Color Selection for Base Cover Raceway Divider Option (+50) Data Access Option (+15) 	<ul style="list-style-type: none"> Permanent Monolithic Non-Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. Panels may be ordered with power/data access base covers and/or raceway divider. Each panel includes all connection hinges needed for each panel. Features Divi Linear trim.

Specify	Notes
<ul style="list-style-type: none"> Fabric Selection for Side A and B Paint Selection for Panel Trim Color Selection for Base Cover Raceway Divider Option (+50) 	<ul style="list-style-type: none"> Permanent Monolithic Powered Panels - Tackable Surface are fabric covered, sound absorbing tackable panels. Includes 8 wire 4 circuit powerway and power/data access base covers. Panels may be ordered with a raceway divider. Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. Each panel includes all connection hinges needed for each panel. Duplex outlets and electrical jumpers are specified separately. See "Electrical". Features Divi Linear trim.

Divi Linear Quarter Glass Permanent Monolithic Panels

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC
NON-POWERED PANELS



H	W	Model Number	List
50	24	P-DLQGWPRM5024	1,562
50	30	P-DLQGWPRM5030	1,711
50	36	P-DLQGWPRM5036	1,866
50	42	P-DLQGWPRM5042	2,018
50	48	P-DLQGWPRM5048	2,166
50	60	P-DLQGWPRM5060	2,455
66	24	P-DLQGWPRM6624	1,799
66	30	P-DLQGWPRM6630	1,989
66	36	P-DLQGWPRM6636	2,178
66	42	P-DLQGWPRM6642	2,368
66	48	P-DLQGWPRM6648	2,554
66	60	P-DLQGWPRM6660	2,929



Divi Linear Trim

DIVI LINEAR QUARTER GLASS PERMANENT MONOLITHIC
POWERED PANELS

H	W	Model Number	List
50	24	P-DLQGWPPM5024	1,887
50	30	P-DLQGWPPM5030	2,051
50	36	P-DLQGWPPM5036	2,208
50	42	P-DLQGWPPM5042	2,359
50	48	P-DLQGWPPM5048	2,513
50	60	P-DLQGWPPM5060	2,818
66	24	P-DLQGWPPM6624	2,144
66	30	P-DLQGWPPM6630	2,341
66	36	P-DLQGWPPM6636	2,530
66	42	P-DLQGWPPM6642	2,726
66	48	P-DLQGWPPM6648	2,920
66	60	P-DLQGWPPM6660	3,305



Divi Linear Trim


Specify	Notes
<ul style="list-style-type: none"> • Style Selection for Glass Insert • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) • Data Access Option (+15) 	<ul style="list-style-type: none"> • Permanent Monolithic Non-Powered Quarter Glass Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. • Panels may be ordered with power/data access base covers and/or raceway divider. • Each panel includes all connection hinges needed for each panel. • 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. • Features Divi Linear trim.

Specify	Notes
<ul style="list-style-type: none"> • Style Selection for Glass Insert • Fabric Selection for Side A and B • Paint Selection for Panel Trim • Color Selection for Base Cover • Raceway Divider Option (+50) 	<ul style="list-style-type: none"> • Permanent Monolithic Quarter Glass Powered Panels are fabric covered hard surface panels with an aluminum wrapped glass insert at the top section of the panel. • Includes 8 wire 4 circuit powerway and power/data access base covers. • Panels may be ordered with a raceway divider. • Includes six duplex outlet hole covers; 24"W panels only include three duplex outlet hole covers. • Each panel includes all connection hinges needed for each panel. • Duplex outlets and electrical jumpers are specified separately. See "Electrical". • 33" fabric height for 50" high panels, 49" fabric height for 66" high panels, 65" fabric height for 82" high panels. • Features Divi Linear trim.

Divi Linear Base Raceway Shrouds, Wall Tracks and Wall Mounts



DIVI LINEAR 90° 2-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS90	31	+8





DIVI LINEAR 90° 3-WAY BASE RACEWAY SHROUDS

Model Number	List	Raceway Divider
P-DLBS3W	31	+8



DIVI LINEAR END BASE RACEWAY SHROUDS

Model Number	List
P-DLSEOR	31



Specify


- Color Selection for Shroud Cover
- Raceway Divider Option

Notes

- Base Raceway Shrouds are required to trim base raceways in order to cover data/electrical cable exposure.
- 90° 2-Way Base Raceway Shrouds are required to trim base raceways at 90° panel connections.
- 90° 3-Way Base Raceway Shrouds are required to trim base raceways at 90° 3-way panel connections.
- End Base Raceway Shrouds are required to trim base raceways at the end of panel runs.

WALL TRACKS

H	Model Number	List
60	A-WTRK60	208



Specify


- Paint Selection

Notes

- Wall Track mounts to fixed walls to provide slotted channel for panel hung items.
- Track will sit approximately 5" off floor when leveled with top of panels to accommodate wall cover base.
- Hardware for mounting wall track to walls is not included.
- Wall track may not be shared between shelf units or flipper door units.
- Two sticks of Wall Track are required for each unit being mounted.

DIVI LINEAR WALL MOUNT KITS

H	Model Number	List
42	P-DLWMKIT42	126
50	P-DLWMKIT50	141
66	P-DLWMKIT66	183



Specify

- Paint Selection



Notes

- Wall Mount Kits mount panel perpendicular to fixed wall.
- Specify according to the height of the panel to be mounted.
- Wall mount hardware to attach wall mount to wall is not included.
- Includes hinges.

Divi Linear Post Filler Kits



DIVI LINEAR 2-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF242	398
50	P-DLPPF250	405
58	P-DLPPF258	416
66	P-DLPPF266	425
82	P-DLPPF282	501
98	P-DLPPF298	576





DIVI LINEAR 3-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF342	359
50	P-DLPPF350	385
58	P-DLPPF358	398
66	P-DLPPF366	410
82	P-DLPPF382	484
98	P-DLPPF398	551



DIVI LINEAR 4-WAY POST FILLER

Panel H	Model Number	List
42	P-DLPPF442	180
50	P-DLPPF450	201
58	P-DLPPF458	212
66	P-DLPPF466	225
82	P-DLPPF482	294
98	P-DLPPF498	363



DIVI LINEAR END OF RUN POST FILLER

Panel H	Model Number	List
42	P-DLPFE42	370
50	P-DLPFE50	378
58	P-DLPFE58	396
66	P-DLPFE66	404
82	P-DLPFE82	471
98	P-DLPFE98	540



Specify

- Metal Power/Data Divider
- Paint Selection
- Paint Selection for Trim (Grade C +28)
- Color Selection for Base Shroud

Notes


- Post Fillers can be used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles or simply as an aesthetic piece.
- 2-way, 3-way, and end or run fillers include a base shroud.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.

Divi Linear Spacers

DIVI LINEAR SPACER 180			
H	Model Number	List	Grade C Paint
42	P-DLSP18042	431	+10
50	P-DLSP18050	439	+10
58	P-DLSP18058	450	+10
66	P-DLSP18066	458	+10
74	P-DLSP18074	523	+10
82	P-DLSP18082	534	+10
98	P-DLSP18098	610	+10



DIVI 4-WAY DATA SEPTUM	
Model Number	List
P-DLMDS4W	8



Specify	Notes
<ul style="list-style-type: none">• Paint Selection• Paint Selection for Trim (Grade C +28)• Color Selection for Base Shroud	<ul style="list-style-type: none">• Spacers can be used to fill gaps created by 3-way connectors on the opposing station wall.• Spacers include two base shrouds.• Specify the spacer height which corresponds to the tallest panel in the configuration.• Available painted only.

Notes
<ul style="list-style-type: none">• Specify for 4-way post fillers when a data septum is required.

Lateral Pass Through Jumpers and Panel-to-Panel Jumpers

LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	43	E-MW8W4PJ24	351
30	48	E-MW8W4PJ30	376
36	55	E-MW8W4PJ36	387
42	61	E-MW8W4PJ42	400
48	67	E-MW8W4PJ48	431
60	79	E-MW8W4PJ60	464




Notes

- Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels.
- Specify the jumper that corresponds to the width of the panel to be passed through.

EXTENDED LATERAL PASS THROUGH JUMPERS

Panel W	Actual L	Model Number	List
24	45	E-MW8W4PJ24E	366
30	51	E-MW8W4PJ30E	384
36	57	E-MW8W4PJ36E	397
42	63	E-MW8W4PJ42E	407
48	69	E-MW8W4PJ48E	442
60	81	E-MW8W4PJ60E	489




Notes

- Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels.
- Specify the jumper that corresponds to the width of the panel to be passed through.

PANEL-TO-PANEL JUMPERS

L	Type	Model Number	List
18	Standard	E-MX8W4PTPC18	246
21	Extended	E-MX8W4PTPC21	258




Notes

- Panel-to-Panel Jumper connects any two adjacent powered panels connected in a straight line or at an angle.
- Order an Extended Panel-to-Panel Jumper to connect any two powered panels across the gap created by a 3-way or 4-way connection.
- 90°, 120° and 135° corners and straight panel-to-panel connections do not require an extended jumper.


Duplex Outlets

DUPLEX OUTLETS		
Line	Model Number	List
1	E-MW8W4DO1	91
2	E-MW8W4DO2	91
3	E-MW8W4DO3	91
4	E-MW8W4DO4	91




- Notes**
- Duplex Outlets are available at designated circuits 1 through 4.
 - Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways.
 - All duplex outlets have black faces.
 - The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange.
 - Outlets are screw mounted to powerway.
 - Duplex outlets are standard 15 amp outlets.

CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS		
Line	Model Number	List
1	E-MW8W4T24DO1	105
2	E-MW8W4T24DO2	105
3	E-MW8W4T24DO3	105
4	E-MW8W4T24DO4	105



- Notes**
- In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting.
 - Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4.
 - If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5.
 - Outlets must have the “controlled” symbol for identification purposes.

DUPLEX OUTLET HOLE COVERS	
Model Number	List
E-UNWC	35




- Notes**
- Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six).
 - 24"W panels only include three duplex outlet hole covers.
 - Order extra hole covers separately only when required.

Base Infeeds and Ceiling Infeeds



SIDE MOUNTED BASE INFEEDS

Length	Model Number	List
72	E-UN8W4BIFS	572



NEW YORK CITY SIDE MOUNTED BASE INFEEDS

Length	Model Number	List
72	E-HM8W4BIFSNY	1,134




Notes

- Side Mounted Base Infeeds provide interface with building power at the base of the panel and mounts to powerway at jumper location.
- Each base infeed is 6' in length, encased in "liquid tight".
- New York City code requires the use of a special base feed with an in-line junction box.

RECEPTACLE MOUNT BASE INFEEDS


Length	Hand	Model Number	List
72	Left	E-UN8W4BIFL	613
72	Right	E-UN8W4BIFR	613




Left-hand infeed shown

NEW YORK CITY RECEPTACLE MOUNT BASE INFEEDS

Length	Hand	Model Number	List
72	Left	E-HM8W4BIFLNY	1,191
72	Right	E-HM8W4BIFRNY	1,191



Left-hand infeed shown



Notes

- Receptacle Mounted Base Infeeds provide interface with building power and mounts to powerway at duplex outlet location.
- Each base infeed is 6' in length, encased in "liquid tight".
- Note: New York City code requires the use of a special base feed with an in-line junction box.

CEILING INFEEDS

Length	Model Number	List
144	E-UN8W4CIF	668




Notes

- Ceiling Infeeds provide interface with building power from a suspended ceiling through a power pole shell.
- Each ceiling feed is 12' long.
- Power pole shells are ordered separately.
- Power/Data Pole Kits are sold and specified separately.

Data Plate Kits, Power/Data Pole Kits and Hardwire Junction Boxes

DATA PLATE KITS

Item	Model Number	List
6 Port Data Gang Plate	E-DP6GFPB	42
CAT 5e Jack	E-HRJ45-SM	143
CAT 6 Data Jack	E-HXJ6BK-SM	156
Hole Blank (10PK)	E-SFBB10-SM	97




Notes

- Snap-In Data Housing Plate for Hubbell Premise™ has six ports.
- Housing is black and snaps into standard AIS DiVi duplex outlet holes, which measure 1.86" x 3.012".
- Note: RJ-45 jacks can be used in place of RJ-11 jacks.

DOUBLE CHANNEL POWER/DATA POLE KIT

Model Number	List
A-PPDV	872



Specify


- Paint Selection

Notes

- Power/Data Pole Kit includes two 68" pole sections, two 68" covers, one pole coupler, two 68" dividers, four pole to panel mounting brackets, one ceiling shroud, one 72" perforated metal strip for attaching pole to ceiling grid, and mounting hardware.
- Order ceiling feeds separately.
- Designed for an 11' ceiling.
- For use at 2-way and 3-way locations only.

HARDWIRE JUNCTION BOX

Model Number	List
E-DVJBCH	547




Notes

- Hardwire Junction Box allows standard, hard wired, single gang duplex outlets to be used in DiVi panels at each standard, modular duplex outlet location.
- Each outlet will require one junction box, and outlets cannot be placed back to back on a spine.
- Junction boxes do not include electrical connectors.
- Boxes are UL listed.
- Decora faced outlets cannot be used.
- Kit includes all hardware required to attach box to DiVi panel at duplex outlet location.
- Standard DiVi powered base covers are required. Order DiVi panels with standard powered base cover option.
- Boxes have standard 0.875" knockouts for electrical connectors.
- Kit includes one low profile metal face plate painted per specification.
- Junction boxes can be used with either 15 amp or 20 amp single gang outlets.
- Box is 3"H x 1.524"W x 7"L.

In-Line Power/Data Pole Combination Kits


2-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP242	993
50	P-DLPFPP250	995
58	P-DLPFPP258	997
66	P-DLPFPP266	999
82	P-DLPFPP282	1,005
98	P-DLPFPP298	1,007




3-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP342	976
50	P-DLPFPP350	978
58	P-DLPFPP358	969
66	P-DLPFPP366	971
82	P-DLPFPP382	976
98	P-DLPFPP398	978



4-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP442	800
50	P-DLPFPP450	802
58	P-DLPFPP458	804
66	P-DLPFPP466	806
82	P-DLPFPP482	810
98	P-DLPFPP498	813



END OF RUN IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPPE42	993
50	P-DLPFPPE50	995
58	P-DLPFPPE58	997
66	P-DLPFPPE66	999
82	P-DLPFPPE82	1,005
98	P-DLPFPPE98	1,007



Specify

- Paint Selection
- Paint Selection for Trim (Grade C +28)
- Color Selection for Base Shroud

Notes

- In-Line Power/Data Pole Combination Kits (1.619"d x 1.860"w) include one in-line power/data pole kit and one post filler kit.
- 2-way, 3-way, and end or run kits include a base shroud.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Designed for an 11' ceiling.

In-Line Power/Data Pole Retrofit Kits and Pole Dividers

IN-LINE POWER/DATA POLE RETROFIT KITS

Panel H	Model Number	List
42	P-DLPFPP42	303
50	P-DLPFPP50	305
58	P-DLPFPP58	307
66	P-DLPFPP66	309
82	P-DLPFPP82	314
98	P-DLPFPP98	316



IN-LINE POWER/DATA POLE DIVIDER

Panel H	Model Number	List
42	P-DVPFPPD42	295
50	P-DVPFPPD50	299
58	P-DVPFPPD58	301
66	P-DVPFPPD66	303
82	P-DVPFPPD82	307
98	P-DVPFPPD98	309



Specify

- Paint Selection

Notes

- In-Line Power/Data Pole Retrofit Kit (1.619"d x 1.860"w) mounts to the top of post fillers which are already installed at 2-way, 3-way, or 4-way connections.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Does not include post filler.
- Designed for an 11' ceiling.
- Channel can accommodate 52 Cat 5 cables or 46 Cat 6 cables or 36 Cat 5 cables or 32 Cat 6 cables in tandem with a ceiling infeed.


Notes

- In-Line Power/Data Pole Divider is specified when electrical cables need to be segregated from data cables by a metal barrier.

Height Adjustable Tables and Round Tables

DAY-TO-DAY 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES

D	W	H	Model Number	List
24	42	29	T-RCR244229HLG2	3,303
24	48	29	T-RCR244829HLG2	3,466
24	54	29	T-RCR245429HLG2	3,527
24	60	29	T-RCR246029HLG2	3,548
24	66	29	T-RCR246629HLG2	3,570
24	72	29	T-RCR247229HLG2	3,593
30	42	29	T-RCR304229HLG2	3,334
30	48	29	T-RCR304829HLG2	3,548
30	54	29	T-RCR305429HLG2	3,575
30	60	29	T-RCR306029HLG2	3,603
30	66	29	T-RCR306629HLG2	3,629
30	72	29	T-RCR307229HLG2	3,657




Specify

Notes

- Laminate Selection for Worksurface
- Color Selection for Edge
- Color Selection for Base - Black, Metallic Silver or Satin White
- Features a 3-stage table base.
- Dimensions shown for Height Adjustable Tables are the nominal sizes.
- Actual sizes will be smaller to provide a 1" perimeter gap required for safety.
- Height adjustable tables available on glides only.

E SERIES 2MM EDGE RECTANGULAR TABLES WITH HEIGHT ADJUSTABLE BASES

D	W	H	Model Number	List
24	42	29	T-RCR244229HG	3,023
24	48	29	T-RCR244829HG	3,186
24	54	29	T-RCR245429HG	3,246
24	60	29	T-RCR246029HG	3,266
24	66	29	T-RCR246629HG	3,289
24	72	29	T-RCR247229HG	3,312
30	42	29	T-RCR304229HG	3,054
30	48	29	T-RCR304829HG	3,266
30	54	29	T-RCR305429HG	3,294
30	60	29	T-RCR306029HG	3,321
30	66	29	T-RCR306629HG	3,351
30	72	29	T-RCR307229HG	3,377



Specify

Notes

- Laminate Selection for Worksurface
- Color Selection for Edge
- Color Selection for Base - Black, Metallic Silver or Satin White
- Features a 2-stage table base.
- Dimensions shown for Height Adjustable Tables are the nominal sizes.
- Actual sizes will be smaller to provide a 1" perimeter gap required for safety.
- Height adjustable tables available on glides only.
- Available in Metallic Silver.

DAY-TO-DAY 2MM EDGE ROUND TABLES WITH STEEL X-BASES

D	H	Model Number	List
36	29	T-RDR3629SXG	1,537



Specify


Notes

- Laminate Selection for Worksurface
- Color Selection for Edge
- Color Selection for Base

Grommet Specifications


RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38
C	Location 2	+38
D	Location 3	+38
E	Locations 2 and 3	+76
F	Locations 1, 2 and 3	+114
G	Locations 1 and 2	+76
H	Locations 1 and 3	+76




CORNER GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1 (Default)	-
C	Location 1 and 2	+38
D	Location 1 and 3	+38
E	Locations 1, 2 and 3	+76

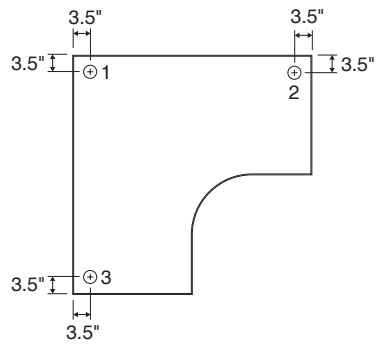

RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38




Rectangular and Curvilinear Corner Worksurfaces

24" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
24	24	W-WS2424	411
24	30	W-WS2430	491
24	36	W-WS2436	534
24	42	W-WS2442	580
24	48	W-WS2448	630
24	54	W-WS2454	700
24	60	W-WS2460	772
24	66	W-WS2466	877
24	72	W-WS2472	960

30" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
30	24	W-WS3024	491
30	30	W-WS3030	577
30	36	W-WS3036	629
30	42	W-WS3042	745
30	48	W-WS3048	806
30	54	W-WS3054	935
30	60	W-WS3060	935
30	66	W-WS3066	1,055
30	72	W-WS3072	1,147




Specify

Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- It is highly recommended that a center support be used on all worksurfaces greater than 48" width.
- When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support. Otherwise, a U-channel is recommended for additional center worksurface support.
- It is not recommended that 36", 42" and 48" deep worksurfaces be cantilevered to panels.
- If these size depths must be panel hung, it is highly recommended that an additional front support, such as a combination leg or full laminate support panel, also be specified.
- Worksurfaces have a thickness of 1 1/8".


CURVILINEAR CORNER TYPE A

D1	W1	Model Number	List
24	36	W-WSCC2436	886
30	42	W-WSCC3042	1,179



STANDARD CURVILINEAR CORNER TYPE B

D1	W1	Model Number	List
24	42	W-WSCC2442	1,070
24	48	W-WSCC2448	1,182
30	48	W-WSCC3048	1,348



Specify

Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Rear corner grommet hole with cover is included.
- Additional grommet holes with covers are specified as options.
- Worksurfaces have a thickness of 1 1/8".



Divi Bullpen Surfaces

24" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
24	24 1/8	1	W-WSDV2424	440
24	30 1/8	1	W-WSDV2430	516
24	36 1/8	1	W-WSDV2436	562
24	42 1/8	1	W-WSDV2442	610
24	48 1/8	1	W-WSDV2448	657
24	54 1/4	2	W-WSDV2454	803
24	60 1/8	1	W-WSDV2460A	803
24	60 1/4	2	W-WSDV2460B	803
24	66 1/4	2	W-WSDV2466	907
24	72 1/4	2	W-WSDV2472A	984
24	72 3/8	3	W-WSDV2472B	984
24	78 1/4	2	W-WSDV2478A	1,055
24	78 3/8	3	W-WSDV2478B	1,055
24	84 1/4	2	W-WSDV2484A	1,126
24	84 3/8	3	W-WSDV2484B	1,126

30" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
30	24 1/8	1	W-WSDV3024	516
30	30 1/8	1	W-WSDV3030	607
30	36 1/8	1	W-WSDV3036	677
30	42 1/8	1	W-WSDV3042	771
30	48 1/8	1	W-WSDV3048	829
30	54 1/4	2	W-WSDV3054	967
30	60 1/8	1	W-WSDV3060A	967
30	60 1/4	2	W-WSDV3060B	967
30	66 1/4	2	W-WSDV3066	1,085
30	72 1/4	2	W-WSDV3072A	1,180
30	72 3/8	3	W-WSDV3072B	1,180
30	78 1/4	2	W-WSDV3078A	1,422
30	78 3/8	3	W-WSDV3078B	1,422
30	84 1/4	2	W-WSDV3084A	1,646
30	84 3/8	3	W-WSDV3084B	1,646



Specify

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)


Notes

- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- Bullpen Rectangular surfaces are designed to compensate for the gap created by natural panel creep for system specific (MWall or Divi) panels only.
- It is highly recommended that a center support be used on all workspaces greater than 48" wide.
- When spanning panel connections with a workspace greater than 48" wide, an additional center cantilever is recommended for added support.
- Otherwise a U-Channel is recommended for additional center workspace support.

Rectangular Worksurfaces for Height Adjustable Tables

RECTANGULAR WORKSURFACES FOR HEIGHT ADJUSTABLE TABLES

D ¹	W ¹	Model Number	List
23	46	W-WS2346	630
23	52	W-WS2352	728
23	58	W-WS2358	772
23	64	W-WS2364	877
23	70	W-WS2370	960
29	46	W-WS2946	806
29	52	W-WS2952	828
29	58	W-WS2958	935
29	64	W-WS2964	1,055
29	70	W-WS2970	1,147



Specify

Notes


- Laminate Selection
- Color Selection for 2mm Edge
- Grommet Location
- Color Selection for Grommet Cover

- Rectangular Worksurfaces for Height Adjustable Tables have a 1 1/8" thickness.
- Height adjustable worksurface support base is specified separately.
- Grommet holes with covers are specified as options.
- These worksurfaces are for use with height adjustable table bases only.
- Worksurfaces for Height Adjustable Tables require a 1" gap around to prevent pinch points.
- See example in Product Details.


Height Adjustable Table Bases

DAY-TO-DAY ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
48" - 72"	24"	Black	WFS-2L-3S24B	2,800
48" - 72"	24"	Metallic Silver	WFS-2L-3S24S	2,800
48" - 72"	24"	Satin White	WFS-2L-3S24W	2,800
48" - 72"	30"	Black	WFS-2L-3S30B	2,800
48" - 72"	30"	Metallic Silver	WFS-2L-3S30S	2,800
48" - 72"	30"	Satin White	WFS-2L-3S30W	2,800



Lowered



Raised


Specify

Notes

- Color Selection for Base
- 3-stage Day-to-Day Height Adjustable Table Bases allow for quick and easy adjustment of worksurface height.
- Available in black, satin white or metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 21.54"H to 47.80"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface) for two leg and 350lbs (incl. worksurface) for three leg.
- Base width may be adjusted from 42"W to 72"W.
- 4 memory presets.
- Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

E SERIES ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Model Number	List
42" - 72"	24"	T-RB2L2S24	2,600
42" - 72"	30"	T-RB2L2S30	2,600




Specify

Notes


- Color Selection for Base
- 2-stage E Series Electric Height Adjustable Table Bases on Glides allow for quick and easy adjustment of worksurface height.
- Available in black, satin white, or metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 26.26"H to 45.94"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface).
- Base width may be adjusted from 42"W to 72"W. 4 memory presets. Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

Divi Panel Mounted A-Legs


DIVI PANEL MOUNTED A-LEGS					SHARED DIVI PANEL MOUNTED A-LEGS				
H	D	Left Hand		List	H	D	Left Hand Shared		List
		Model Number	Model Number				Model Number	Model Number	
27	12	WFS-ALW2712DVL	WFS-ALW2712DVR	504	27	12	WFS-ALW2712DVLS	WFS-ALW2712DVRS	542
27	24	WFS-ALW2724DVL	WFS-ALW2724DVR	574	27	24	WFS-ALW2724DVLS	WFS-ALW2724DVRS	612
27	30	WFS-ALW2730DVL	WFS-ALW2730DVR	612	27	30	WFS-ALW2730DVLS	WFS-ALW2730DVRS	650




Left Hand



Right Hand



Left Hand Shared




Right Hand Shared

Specify


- Paint Selection (+25 for Grade C)

Notes


- **Important:** A-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.
- A-Legs are constructed from 1 x 2 painted steel.
- Legs have 1 1/2" leveling glides.
- A-Leg welded construction allows for attachment to the worksurface.
- Ships installed with panel attachment brackets. Panel locking bracket for panel attachment situations ships separate.




EXAMPLE 1 - UNSTABLE
32"H Structural Wing




EXAMPLE 2 - UNSTABLE
32"H Panel with Cantilever




EXAMPLE 3 - UNSTABLE
32"H Panel with Cantilevers



EXAMPLE 1 - STABLE
Standard Structural Wing



EXAMPLE 2 - STABLE
32"H Panel with Floor Support




EXAMPLE 3 - STABLE
32"H Panel with Panel Mounted A-Legs

N-Legs, Combination Legs and Pedestal-to-Panel Attachment Brackets

2.5 X 2.5 POST N-LEG

H	D	Model Number	List
27	24	WFS-NL22724	683
27	30	WFS-NL22730	693



Specify	Notes
• Paint Selection	

PEDESTAL-TO-PANEL ATTACHMENT BRACKET

Model Number	List
S-DVPMPB	277



Specify	Notes
• Paint Selection	<ul style="list-style-type: none">• Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels.• These brackets serve as a space filler and as a way to add stability to panels.• Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal).

COMBINATION SUPPORT LEGS

Model Number	List
WFS-LEG	472




Specify	Notes
• Style Selection - Black or Brushed Steel	<ul style="list-style-type: none">• Combination Support Leg is available in black or brushed steel.• With a unique set of adapters, legs can be converted from standard peninsula legs to equal height mobile legs, extended mobile legs, nesting legs, or extended height legs.• Standard legs are sold in a kit with one 24 3/4" leg (black or brushed steel), one 2 11/16" extender and one 7/16" high glide with 1" of adjustment.• Standard legs can be converted to mobile legs and back with the same base leg unit.• Casters are ordered separately.• Extender, glide and caster are always black.• Legs ship disassembled and flat.

Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels

STANDARD CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Left	WPS-UNCT24L	110
24	18	Right	WPS-UNCT24R	110
24	18	Pair	WPS-UNCT24P	211
30	25.5	Left	WPS-UNCT30L	211
30	25.5	Right	WPS-UNCT30R	211
30	25.5	Pair	WPS-UNCT30P	418




Notes

- Standard Cantilevers provide cantilevered worksurface support from panel or wall track at either the left or right hand side of a worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Standard cantilevers may also be used as a center support.
- Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

SHARED CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Single	WPS-UNCT24S	157
24	18	Pair	WPS-UNCT24SP	309
30	25.5	Single	WPS-UNCT30S	309
30	25.5	Pair	WPS-UNCT30SP	618




Notes

- Shared Cantilevers provide cantilevered support from panel or wall track at the seam between two worksurfaces.
- All worksurface support components fasten directly to worksurfaces with screws.
- Shared Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

SIDE SUPPORT / REAR BRACKETS

Hand	Model Number	List
Left	WPS-SSSAL	81
Right	WPS-SSSAR	81
Pair	WPS-SSSA	154



Notes

- Side Support / Rear Brackets provide direct support from panel or wall track along the short side of rectangular worksurface or at rear of corner worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Side Support / Rear Brackets are painted black as a standard.
- Available in black only.

FLAT PLATES & U-CHANNELS

Item	Model Number	List
Flat Plate	WPS-FP	37
U-Channel	WPS-VC48	151



Notes

- Flat Plate is used to splice two worksurfaces together at front edge.
- The 3.5" x 1.5" plate has four holes per side for superior adaptability and rigidity.
- It is recommended that flat plates are also specified at the front edge helping splice the two worksurfaces together.
- Flat Plates are painted black as a standard.
- U-Channel mounts to underside of longer worksurfaces to provide bracing where center support cantilever is not possible.
- All worksurface support components fasten directly to worksurfaces with screws.
- U-Channels are painted black as a standard.


Clip Screen Product Details

Note: AIS Screens are designed to be easily installed in most industry standard situations, however, it is the responsibility of the dealer to understand the installation methods required as well as limitations of the situation or product that you intend to install on.


Screen installation instructions can be found at : <https://www.ais-inc.com/resources/installation-instructions>

The following information only pertains to AIS product.

Clip Screen Product Details



1/4" Clear Glass



3/8" Clear Glass

- Available in 1/4" clear glass and 3/8" clear glass.
- Screens come with all necessary mounting hardware (clips, channel, feet, brackets, etc) at prices shown.
- Clip dimensions: 2 1/8" H , 2 1/3" W and 1 1/2" D.
- Screens mounted to surfaces will receive 2 clips for surfaces 24" – 54" wide, 3 clips for surfaces 60" – 72" wide and 4 clips for surfaces 78" – 84" wide.
- Surface Mount screens screw directly to top of panels.
- Divi specific Panel Top Screens can only be applied to Divi product. For Panel Top Screens that can be used with other systems, please see the Clear & PET Screens price list.
- Standard in Metallic Silver.

Glass Material

- AIS Glass is standard with polished edges and straight corners.
- AIS Glass is standard tempered glass with standard iron content. Request samples from literature center.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).
- Glass is easily cleaned with common janitorial supplies.
- 1/4" Glass weighs 2.88 lbs per square foot.
- 3/8" Glass weighs 4.32 lbs per square foot

Glass 1/4" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 1/4" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-3P3B1U1224B	613
12	30	Y-3P3B1U1230B	628
12	36	Y-3P3B1U1236B	637
12	42	Y-3P3B1U1242B	670
12	48	Y-3P3B1U1248B	702
12	54	Y-3P3B1U1254B	718
12	60	Y-3P3B1U1260B	772
12	66	Y-3P3B1U1266B	805
12	72	Y-3P3B1U1272B	839
12	78	Y-3P3B1U1278B	872
12	84	Y-3P3B1U1284B	902
16	24	Y-3P3B1U1624B	714
16	30	Y-3P3B1U1630B	763
16	36	Y-3P3B1U1636B	805
16	42	Y-3P3B1U1642B	875
16	48	Y-3P3B1U1648B	914
16	54	Y-3P3B1U1654B	974
16	60	Y-3P3B1U1660B	1,026
16	66	Y-3P3B1U1666B	1,042
16	72	Y-3P3B1U1672B	1,065
16	78	Y-3P3B1U1678B	1,085
16	84	Y-3P3B1U1684B	1,104

GLASS 1/4" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-3P3B1U2024B	765
20	30	Y-3P3B1U2030B	795
20	36	Y-3P3B1U2036B	842
20	42	Y-3P3B1U2042B	886
20	48	Y-3P3B1U2048B	945
20	54	Y-3P3B1U2054B	1,007
20	60	Y-3P3B1U2060B	1,068
20	66	Y-3P3B1U2066B	1,129
20	72	Y-3P3B1U2072B	1,191
20	78	Y-3P3B1U2078B	1,252
20	84	Y-3P3B1U2084B	1,312




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

- Paint Selection

Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Glass 3/8" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 3/8" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-4P3B1U1224B	832
12	30	Y-4P3B1U1230B	836
12	36	Y-4P3B1U1236B	910
12	42	Y-4P3B1U1242B	982
12	48	Y-4P3B1U1248B	1,059
12	54	Y-4P3B1U1254B	1,133
12	60	Y-4P3B1U1260B	1,210
12	66	Y-4P3B1U1266B	1,284
12	72	Y-4P3B1U1272B	1,358
12	78	Y-4P3B1U1278B	1,435
12	84	Y-4P3B1U1284B	1,509
16	24	Y-4P3B1U1624B	792
16	30	Y-4P3B1U1630B	885
16	36	Y-4P3B1U1636B	927
16	42	Y-4P3B1U1642B	1,032
16	48	Y-4P3B1U1648B	1,144
16	54	Y-4P3B1U1654B	1,222
16	60	Y-4P3B1U1660B	1,258
16	66	Y-4P3B1U1666B	1,370
16	72	Y-4P3B1U1672B	1,456
16	78	Y-4P3B1U1678B	1,481
16	84	Y-4P3B1U1684B	1,556

GLASS 3/8" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-4P3B1U2024B	903
20	30	Y-4P3B1U2030B	1,023
20	36	Y-4P3B1U2036B	1,139
20	42	Y-4P3B1U2042B	1,257
20	48	Y-4P3B1U2048B	1,370
20	54	Y-4P3B1U2054B	1,490
20	60	Y-4P3B1U2060B	1,605
20	66	Y-4P3B1U2066B	1,724
20	72	Y-4P3B1U2072B	1,836
20	78	Y-4P3B1U2078B	1,952
20	84	Y-4P3B1U2084B	2,070




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

- Paint Selection


Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Mid-Height Shelf and Flipper Doors Units

LINEAR MID-HEIGHT SHELF UNITS

H	W	D	Model Number	List
7.75	30	12	S-SHFLDV30	366
7.75	36	12	S-SHFLDV36	378
7.75	42	12	S-SHFLDV42	400
7.75	48	12	S-SHFLDV48	442
7.75	60	12	S-SHFLDV60	466



Specify


- Paint Selection

Notes

- Linear Mid-Height Shelf Units provide low profile overhead storage.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive task lights.
- Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware.
- Order shelf unit that corresponds to panel width.
- Metal shelves have a weight capacity of 1.5 lbs per linear inch of width.

METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNIT

Interior H	W	Interior D	Model Number	List
14.25	30	12	S-FDUDV30	927
14.25	36	12	S-FDUDV36	958
14.25	42	12	S-FDUDV42	978
14.25	48	12	S-FDUDV48	1,042
14.25	60	12	S-FDUDV60	1,261



Specify

- Paint Selection


Notes

- Type C Flipper Door Unit - Metal Door Front provides binder height, lockable overhead storage.
- Door opens and stores above top cover pan.
- Flipper unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive task lights.
- All flipper doors are lockable with two supplied keys.
- Order flipper unit that corresponds to panel width.
- Metal shelves have a weight capacity of 1.5 lbs per linear inch of width.

L Series Pedestals


L SERIES STRUCTURAL BOX-BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBBFJ24	1,241
30	28	S-PEDBBFJ30	1,753



L SERIES STRUCTURAL FILE-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDFFJ24	1,241
30	28	S-PEDFFJ30	1,753




Specify	Notes
<ul style="list-style-type: none">• Paint Selection	<ul style="list-style-type: none">• L Series Structural Pedestals have a square front with rectangular pulls.• Box drawers and file drawers have full depth, smooth riding ball bearing suspensions.• All pedestals are lockable with two supplied keys.• Lock cores are removable with lock removal keys. Master keys are also available.• Extra lock core sets are available for keying pedestals alike.• Pedestals come equipped for front to back letter-sized filing.• Box-box-file pedestals include one box drawer pencil tray.• Adjustable height is 27 1/2" to 29".

L Series Pedestals


L SERIES MOBILE BOX-FILE PEDESTALS

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	1,492




L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

Surface D	Actual D	Model Number	List
24	22	S-PEDBFMJ24V2	1,975




12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS

D	W	Model Number	List
24	12	S-PEDBFJ1224	989



12" WIDE L SERIES MOBILE BOX-FILE PEDESTALS WITH CUSHION

D	W	Model Number	List
24	12	S-PEDBFMJ1224	1,321



Specify

- Paint Selection
- Fabric Selection for Pedestal Cushion (Mirador Upholstery only)


Notes

- L Series Mobile Pedestals have a square front with rectangular pulls.
- Box drawers and file drawers have full depth, smooth riding ball bearing suspensions.
- Mobile pedestals include counterweights that are field installed.
- All pedestals are lockable with two supplied keys.
- Lock cores are removable with lock removal keys. Master keys are also available.
- Extra lock core sets are available for keying pedestals alike.
- Pedestals come equipped for front to back letter-sized filing, 12" wide pedestals come equipped for side-to-side filing.
- Finished height of pedestal is 21 3/8" (box-file).
- Finished height of pedestal with cushion is 23 5/8.
- Pedestal cushion can be upholstered in Mirador upholstery fabric only.

L Series Laterals and Replacement Pulls

METAL FRONT L SERIES 2-DRAWER LATERAL FILES

Min H.	Actual W	Actual D	Model Number	List
27 1/2	30	18	S-LATJJ2D30	2,180
27 1/2	36	18	S-LATJJ2D36	2,337




Specify	Notes
<ul style="list-style-type: none">• Paint Selection	<ul style="list-style-type: none">• L Series 2-Drawer Lateral files have full width to align with pedestals.• File drawers have full depth, smooth riding ball bearing suspensions.• All laterals are lockable with two supplied keys.• Laterals accommodate letter, A4, and Legal sized filing and include front to back conversion bars for each drawer.• Standard with rectangular pull.

REPLACEMENT PULLS


Type	Model Number	List
Silver Loop Pull	X-HAND-LOOPS	31
Silver Bar Pull	X-HAND-BARS	32
Rectangular Pull	X-HAND-RPS	32



Loop Pull



Bar Pull




Rectangular Pull

Notes
<ul style="list-style-type: none">• Replacements only.• Pulls work for all metal and laminate storage units with the exception of roll out/pantry towers.• For replacement handles for roll out/pantry towers use only bar pull.

Task Lights and Task Light Cord Managers

OVERHEAD LED TASK LIGHTS

Length	Model Number	List
24	A-LEDTL-61024	591
40	A-LEDTL-61540	877



Notes

- LED task lights are 1-1/4" wide, and 3/8" in thickness and come in 24 and 40 inch lengths.
- Brushed aluminum with black trim.
- Attachable to the underside of overhead cabinet via the built-in magnets, or mounted to non-metal surfaces using the adjustable mounting bracket.
- Feature 100 lm/w with warm white and white color temps and convenient one-touch On/Off and Touch-and-Hold dimmer.
- Power-in and power-switch are reversible.
- Power cord is 10' in length.

TASK LIGHT CORD MANAGERS

H	Model Number	List
3	A-DVWMTL03	67
11	A-DVWMTL11	79
16	A-DVWMTL16	94




Notes

- Task Light Cord Managers engage to panel hanger frame slots.
- Managers are available in three heights: 3", 11" and 16".
- Use 16" to achieve a full height finished aesthetic for managing task light cords under full height shelves, flipper doors, or under half height shelves hung level with full height shelves on 65"/66"/67" high panels.
- Use 11" to achieve a full height finished aesthetic for managing task light cords under half height shelves on 50" high panels.
- Use 3" for managing cords above tackboards or double them up for any of the above situations when a full height manager is not required.
- Task Light cord managers are black only to match task light cords and are non-handed for use on either the left or right side of a panel.
- Hanger frames can accommodate only one task light cord manager and will not fit behind tackboards.
- Cord managers are painted black as standard.

Monitor Arms

SINGLE MONITOR ARM

Model Number	List
A-ERSMASB	526




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19 lbs per arm.
- Features 360 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Single monitor arm features a snap-in/removable cord clip for wire management.
- Single monitor arm features a lock-in-place monitor mount for simplified installation.
- Tilt range of -45 degrees to +90 degrees. Arm height adjustment range of 300mm.

DUAL MONITOR ARM

Model Number	List
A-ERDMASB	894




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19 lbs per arm.
- Features 360 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Dual monitor arm features a lock-in-place monitor mount for simplified installation.
- Tilt range of -45 degrees to +90 degrees. Arm height adjustment range of 300mm.

DUAL MONITOR ARM FOR SHALLOW DEPTH WORKSURFACES

Model Number	List
A-ERDMAM9	894




Notes

- Suitable for LCD screens up to 27".
- Load capacity of 14.3 lbs. per monitor.
- Features 360 degree rotation at the mounting base and extension.
- Monitors mount with M4 screws to a VESA bracket.
- VESA monitor mount for 75mm and 100mm standard.
- Mounts with c-clamp on the table edge or through a grommet hole.
- Available in silver only.
- Shallow depth monitor arm does not include a lock-in-place monitor mount.

Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats

STANDARD EXTENDED KEYBOARD ARM

Model Number	List
A-KEYBZE	1,195




Notes

- Keyboard Arm / Trays mount to underside of worksurfaces to support standard computer keyboards.
- Keyboard platform area behind wrist rest measures 8 1/2" deep x 20" wide.
- All keyboard trays include a factory mounted, synthetic leather wrist rest.

STANDARD MOUSE TRAY

Model Number	List
A-MSETS	211




Notes

- Mouse Tray mounts to either the left or right side of keyboard tray platform with screws to service both left and right handed users.
- Mouse tray has standard mouse pad surface and requires no additional mouse pad.
- Mouse area measures 7 1/4" x 7 1/4".
- Mouse tray swivels around vertical axis 270° and has 30° of tilt around the horizontal axis (15° above keyboard tray plane to 15° below plane, independent of keyboard tray tilt).
- Order mouse tray separately.

PENCIL DRAWER

H	W	D	Model Number	List
2 1/4	21 1/4	16 1/4	A-PDRWP	308




Notes

- Pencil Drawer provides convenient, low profile storage of loose items.
- Constructed of rigid, durable PVC with black textured finish.
- Plastic slides mount underneath worksurfaces with screws provided.
- Pencil drawer measures 16 1/4" deep x 21 1/4" wide x 2 1/4" high.
- Note: Plan pencil drawer location around worksurface support elements.

ANTI-FATIGUE MAT

W	D	Thickness	Model Number	List
34	20	3/4	A-HF342075	251




Notes

- Custom blended medium density polyurethane foam.
- High tear strength polyurethane outer membrane.
- Available in black only.

Tackboards

TACKBOARDS				TACKBOARDS			
H	W	Model Number	List	H	W	Model Number	List
12	24	A-TACKDV1224	295	19	24	A-TACKDV1924	385
12	30	A-TACKDV1230	314	19	30	A-TACKDV1930	411
12	36	A-TACKDV1236	327	19	36	A-TACKDV1936	429
12	42	A-TACKDV1242	344	19	42	A-TACKDV1942	453
12	48	A-TACKDV1248	367	19	48	A-TACKDV1948	477
12	60	A-TACKDV1260	477	19	60	A-TACKDV1960	511
15	24	A-TACKDV1524	302				
15	30	A-TACKDV1530	321				
15	36	A-TACKDV1536	331				
15	42	A-TACKDV1542	355				
15	48	A-TACKDV1548	373				
15	60	A-TACKDV1560	490				



Specify

Notes


- Fabric Selection

- Tackboards are 7/8" thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices.
- Tackboards are available in three different heights.

Lock Cores and Keys

SILVER LOCK CORES AND KEYS

Key Type	Model Number	List
Core with 2 keys	S-W1CORE1	24
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2	37
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3	58
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4	74
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5	92
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6	107
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7	125
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8	144
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9	161
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10	178
Master Key	RS-W1MKEY	18
Core Removal Key	RS-W1CRKEY	18
Replacement Key	RS-WK _ _ _ (Key Number)	25




Notes

- Silver keyed alike lock cores should be specified when ordering Option E in the Lock Choice for Calibrate: No Lock w/ Silver Ring for Keyed Alike.
- Keyed alike lock cores must be installed in the field.
- Keys and Lock Cores are available in #'s 226 through 425.
- A core removal key is needed to remove an existing core from the lock housing in order to replace with a new core.
- Order sets based on quantity of storage items to be keyed alike.

BLACK LOCK CORES AND KEYS

Key Type	Model Number	List
Core with 2 keys	S-W1CORE1B	24
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2B	37
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3B	58
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4B	74
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5B	92
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6B	107
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7B	125
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8B	144
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9B	161
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10B	178



Notes

- Black keyed alike lock cores should be specified when ordering Option D in the Lock Choice for Calibrate: No Lock w/ Black Ring for Keyed Alike.
- Keyed alike lock cores must be installed in the field.
- Keys and Lock Cores are available in #'s 226 through 425.
- A core removal key is needed to remove an existing core from the lock housing in order to replace with a new core.
- Order sets based on quantity of storage items to be keyed alike.
- Black lock cores not available for L-Series storage.
- Black lock cores only available on laminate storage.

Task Chairs

BOLTON MID-BACK TASK CHAIR

Description	Model Number	List	Lumbar Support
Mid-Back Mesh Task Chair	4471	739	+36
Adjustable Lumbar Support	4400LUMBAR	44	-



Without Adjustable
Lumbar Support



With Adjustable
Lumbar Support

Weight: 32 lbs. Width: 26 Depth: 24 Height: 36.75 - 40.75 Seat Height: 17 - 21
Arm Height: 7.5 - 10 Seat Depth: 17 - 21

Notes

- The Bolton Mid-Back Task Chair, a full featured task chair, has the versatility to fit any space. From the executive office to the front office, Bolton provides comfort and elegance with its thoughtful design.
- Bolton is highly versatile allowing users to choose the right configuration for their size, shape and tasks at hand.
- Synchro-tilt motion, adjustable seat height, height adjustable arms (1D arms), seat depth adjustment, tilt tension adjustment and upright back lock allow the user to fine-tune Bolton to their personal preference.
- Bolton ships read to assemble.
- Upholstered with black mesh on the back and black seat fabric.
- Optional adjustable lumbar support available.
- Use 4400LUMBAR for adjustable lumbar support replacement.

DEVENS TASK CHAIR

Description	Model Number	List
Devens Black Task Chair	4600	925
Devens Grey Task Chair	4630	1,038



Devens Black
Task Chair



Devens Grey
Task Chair

Weight: 35 lbs. Width: 27 Depth: 26 Height: 37 - 41.75 Seat Height: 16.75 - 21.5
Seat Depth: 16.75 - 18.75 Seat Width: 19 Arm Height: 6.75 - 10.5 Lumbar Apex Height: 8 - 10

Notes

- The user friendly Devens with uncompromised comfort offers clean lines, outstanding fit and finish all resulting in a sophisticated and understated task chair at an outstanding price point.
- Seat height, seat depth, adjustable lumbar support and 4D arm adjustability along with a multiple position back lock allow the user to fine-tune Devens for their size and shape, tasks at hand and preference.
- Devens is equipped with an advanced automatic tension weight activated synchro-tilt mechanism.
- Upholstered with black mesh back and black seat fabric or graphite mesh back and grey seat fabric.
- Devens is BIFMA compliant and rated for users up to 300 pounds.
- Devens ships ready to assemble.
- Devens has a 24/7 10-year warranty.

Side Chairs

REVERE MESH BACK TASK CHAIR

Description	Model Number	List
Mesh Back Task Chair	5400	535



Weight: 38 lbs. Width: 25.75 Depth: 26 Height: 37 Seat Height: 15.4 - 18.6
 Seat Depth: 18.56 Arm Height: 8.5 - 12.3 Lumbar Apex Height: 8.25

Notes

- Revere seating with uncompromised comfort offers proper adjustability and robust construction at an outstanding price point.
- Features include tension adjustment, height adjustable seat, height adjustable arms, height adjustable lumbar support and upright back lock allowing the user to fine-tune Revere for optimal comfort and usability.
- Revere is available with a standard black seat and black mesh back.
- Revere is rated for users up to 300 pounds and is shipped ready to assemble.

PAXTON SIDE CHAIR

Description	Model Number	List
Side Chair on Glides	3400	340



Weight: 15 lbs. Width: 23 Depth: 21 Height: 32 Seat Height: 18
 Seat Depth: 17.5 Seat Width: 18 Arm Height: 9 Lumbar Apex Height: 9


Notes

- Paxton, a perfect companion to the Bolton chair, is a stackable mesh back side chair with soft edges.
- It's thoughtfully designed seat cushion offers comfort and support.
- The lightweight side chair is ideally suited for use in cafeteria, training spaces, classrooms, waiting rooms, auditoriums or any area where extra seating is required.
- Paxton can also be used as a cost-effective side or guest chair.
- Paxton ships ready to assemble.

Volker Cubes

STANDARD VOLKER CUBE

H	W	D	Model Number	Grade A List
18	18	18	F-CUBE181818	776



Specify	Notes
• Fabric Selection (Mirador Upholstery only)	<ul style="list-style-type: none">• The Volker Cube can be easily and discretely tucked away when not in use, or effortlessly pulled out when ready to use.• The Volker Cube features a sleek design with the upholstery fabric of choice to complete the design of your workspace.• The cube features hubless casters allowing for ease of motion as well as adding an attractive design element.• Volker Cubes can be upholstered in Mirador upholstery fabric only.



National Showrooms:

Leominster

AIS Headquarters
25 Tucker Drive
Leominster, MA 01453

Chicago

The Merchandise Mart
Suite 391
Chicago, Illinois 60654

New York

AIS New York
257 Park Avenue South
New York, New York 10010

Washington, D.C.

AIS Washington, D.C.
1501 M St, NW, STE 230
Washington, D.C. 20005

GSA Sales

GSA Contract 47QSM20D08Q4
Multiple Award Schedule (MAS)
Large Category: Furniture & Furnishings
Subcategories: Office Furniture, Packaged
Office Furniture and Furniture Services

For additional information on AIS:

Dealer Showrooms, Representative
Directory, Project Case Studies, Online
Catalog & Product Showcase
Visit: **www.ais-inc.com**