



Details

DiVi stack-on panels are held in place with four pins using the same channel in the panel hanger frame that the hinges use. Stack-on installation is virtually the same for both permanent monolithic and insert panels, with the exception of insert panels requiring an additional step for the insert retainers.

Permanent Monolithic Glass Stack Installation

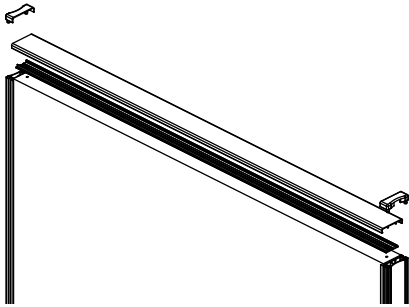


Step 1: Remove hanger rail end topcaps, panel topcap, and topcap retainer.
NOTE: Remove topcap carefully as it will be installed on top of the stack-on.

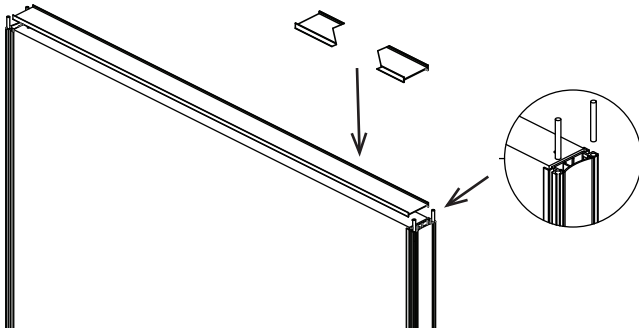


Step 2: Insert four pins into the hinge channels of the hanger frame. Place "H" bar on top of base panel (not needed for glass stack on). **IMPORTANT** - See warning note (right). Pins need to be 3/4" into the channel (use a mallet for this step). (Pin Part Number RH-RP316112)

Fabric Stack (with "H" bar)

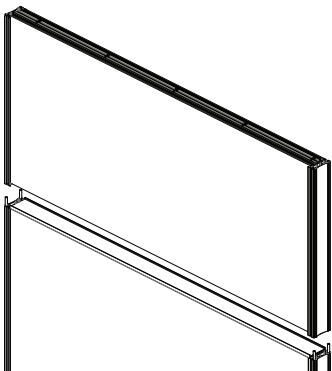

Glass Stack (without "H" bar)

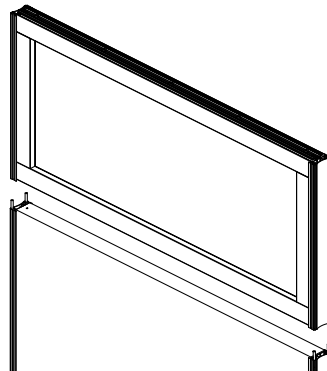


Step 3: Install stack-on using the pins to secure the unit. Use a mallet and slowly tap the stack-on panel into place. **DO NOT hit the topcap retainer with mallet.**

Finish: Reinstall the topcap and hanger rail end topcaps.

Insert Panel Stack Installation


Step 1: Complete Steps 1-3 (left) without re-installing topcap.

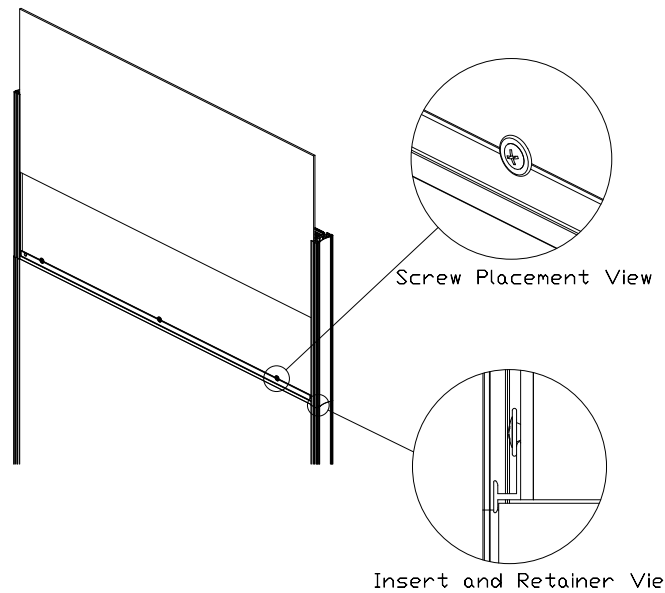

Step 2: Slide insert retainer into place, then secure the retainer with the provided screws.
Step 3: Slide insert into the stack-on panel.
Step 4: Reinstall the topcap and hanger rail topcaps.



In order to properly seat the four pins into the existing panel, you will need to pull up the existing panel hinges and cut a small piece out of one side. The cut out should be 1.5" (see below right).

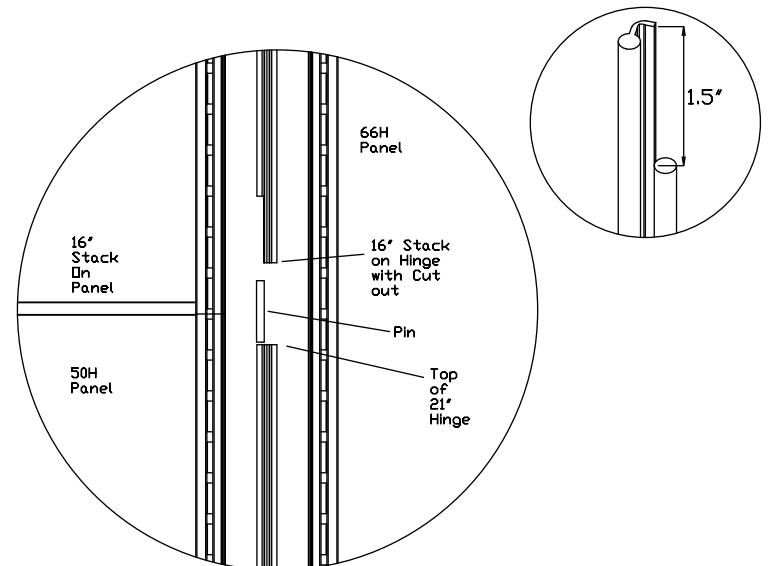

HiLo Situation

P-DVINSTRUCT02 V3 Stack On Panels